

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
		Chassis CS9600	
	53 1342	Gebrauchsanweisung V01,V02	Operation Instruction
	53 1343	V03	
	53 5668	BASIS Service Manual	
	76 0089	Fernbedienung FB 108 (keine Einzelteile)	Remote Control (no seperate parts)
!	75 7906	Netzkabel (entstört)	power cord
!		Bildröhre	picture tube
	78 3652	A59EAK71X44(CS) V01	
	78 3653	A66EAK71X44(CS) V02,V03	
!	76 0095	Bildrohrplatte	CRT Socket Board
	76 0097	Featurebox	
	76 0094	Netzentstörplatte	Mains Interference Elimination
!	76 0093	Netzschalterplatte	Power Switch Board
	—	SAT–Baustein siehe FZ942S2	SAT–module FZ942S2
	76 0096	Signalbaustein (ZF+Tuner) V01,V02	Signal Board (Tuner+IF)
	76 0103	V03	
	759266	Tuner	
!		Sicherheitsbauteil	safety part


Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
!	75 9266	Abdeckung Euro–AV	
	79 6160	Chinch (Front)	
	73 5755	Bildrohrfassung	picture tube socket
		Buchsen	socket
	79 6922	Euro–AV schwarz	Euro–AV black
	79 6923	Euro–AV orange	Euro–AV orange
	79 5506	Chinch 3–fach (FBAS/NF L,R)	rca
		Chassisführung	chassis fixture
	76 0091	links	left
	76 0092	rechts	right
!		Entmagnetisierungsspule	demagnetizing coil
!	78 3296	V01	
!	78 3276	V02,V03	
!	73 7610	Fokus und UG2–Reglereinheit	focus and UG2 VR
!		Folie (wärmeleitend)	foil
	79 5673	T60006	
	79 3886	D60006/61016/61026/61036/61056/T5 0028/50029/52003/	
	79 5674	D53071/53072	
	79 6619	Brandschutz	
!		Halter	holder
	76 0098	Signal Baustein	
	79 5901	Entmagnetisierungsspule	
	79 4889	SI6001	
!		Sicherheitsbauteil	safety part

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
OK60031 ! OK60046 !		 73 7711 73 7711	CNY17F1/ CNY1 CNY17F1/ CNY1
Q32305 Q32305 Q34021 Q34022 Q80055	79 2136 79 6657 79 4321 79 4320 79 6937	 18,432 MHZ V03 18,432MHZ (#439–9) V01,V02 4,433619 MHZ 3,579545 MHZ V03 Keramik 18MHZ	
!	79 6365 73 7487	 Netz (Öko) Prog./Lautst. +/–	
!		Sicherheitsbauteil	safety part

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
SI6001	79 0920	T3,15A H 250V	
SI60001	79 2199	Löt 2 A/T	
SI60201	79 6947	Löt 100 MA/T	
SI61022	73 8400	Löt 1,6 A/T	
SI61026	73 6307	Löt 2,5 A/T	
SI61036	73 6307	Löt 2,5 A/T	
SI61056	73 6307	Löt 2,5 A/T	
SI61061	79 2199	Löt 2 A/T	
SI61066	79 2199	Löt 2 A/T	
			
L53021	79 4814	Linearitätsregler	
L 55014	73 8389	O/W Auskoppelspule	
L61011	73 6349	Dämpfungssperle	
L61016	73 6349	Dämpfungssperle	
L61021	73 6349	Dämpfungssperle	
L61026	73 6349	Dämpfungssperle	
L61036	73 6349	Dämpfungssperle	
L61056	73 6349	Dämpfungssperle	
L61061	73 6349	Dämpfungssperle	
L61066	73 6349	Dämpfungssperle	
			
TR52001	79 4314	Treiber–Übertrager	
TR53010	76 0100	Dioden Split	
TR60001	76 0102	Speerwandler	
TR60220	79 6948	Stand By	

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
R703 !	73 6319	100 Ohm 5%	
R6003	73 5741	NTC 4,7 Ohm 30%	
R6009 !	73 2974	PTC DUO	
R21101 !	79 6938	6,2 Ohm 5%	
R32033	73 3165	4,7 KOhm LIN	V03
R32033	73 3167	22 KOhm LIN	V01,V02
R32252	73 3121	470 Ohm LIN	V03
R32315 !	79 6284	12 KOhm 5%	
R32357 !	79 5991	12 Ohm 5%	
R32359 !	79 6939	82 Ohm 5%	
R40013 !	79 6940	1 KOhm 5%	
R40017 !	73 7759	1,8 Ohm 5%	
R40027 !	73 7759	1,8 Ohm 5%	
R40031 !	79 0146	18 Ohm 5%	
R41016 !	73 5814	12 Ohm 5%	
R43004 !	79 5240	3,3 Ohm 5%	
R43098 !	79 5240	3,3 Ohm 5%	
R50007 !	79 6417	1,6 Ohm 2%	
R50008 !	79 6417	1,6 Ohm 2%	
R50027 !	79 6941	2,2 Ohm 5%	
R50029 !	79 6942	270 Ohm 5%	
R52001 !	79 2384	4,7 Ohm 5%	
R53002 !	79 6418	1,5 Ohm 5%	
R53003 !	79 6418	1,5 Ohm 5%	
R53008 !	79 6600	10 KOhm 5%	
R53021 !	79 6943	220 Ohm 10%	
R54001 !	73 3917	0,75W 0,33 Ohm 10%	
R55012 !	79 6944	470 Ohm 5%	
R55014 !	73 4893	4,7 Ohm 5%	

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
R60008	79 5556	15 KOhm 10%	
R60207 !	79 0667	4,7 Ohm 5%	
R60211 !	79 6945	2,7 MOhm	
R60212 !	79 6945	2,7 MOhm	
R61022 !	79 6946	2,7 Ohm 10%	
R61313	73 2787	10 KOhm	
R62049 !	79 2392	2,7 MOhm 5%	

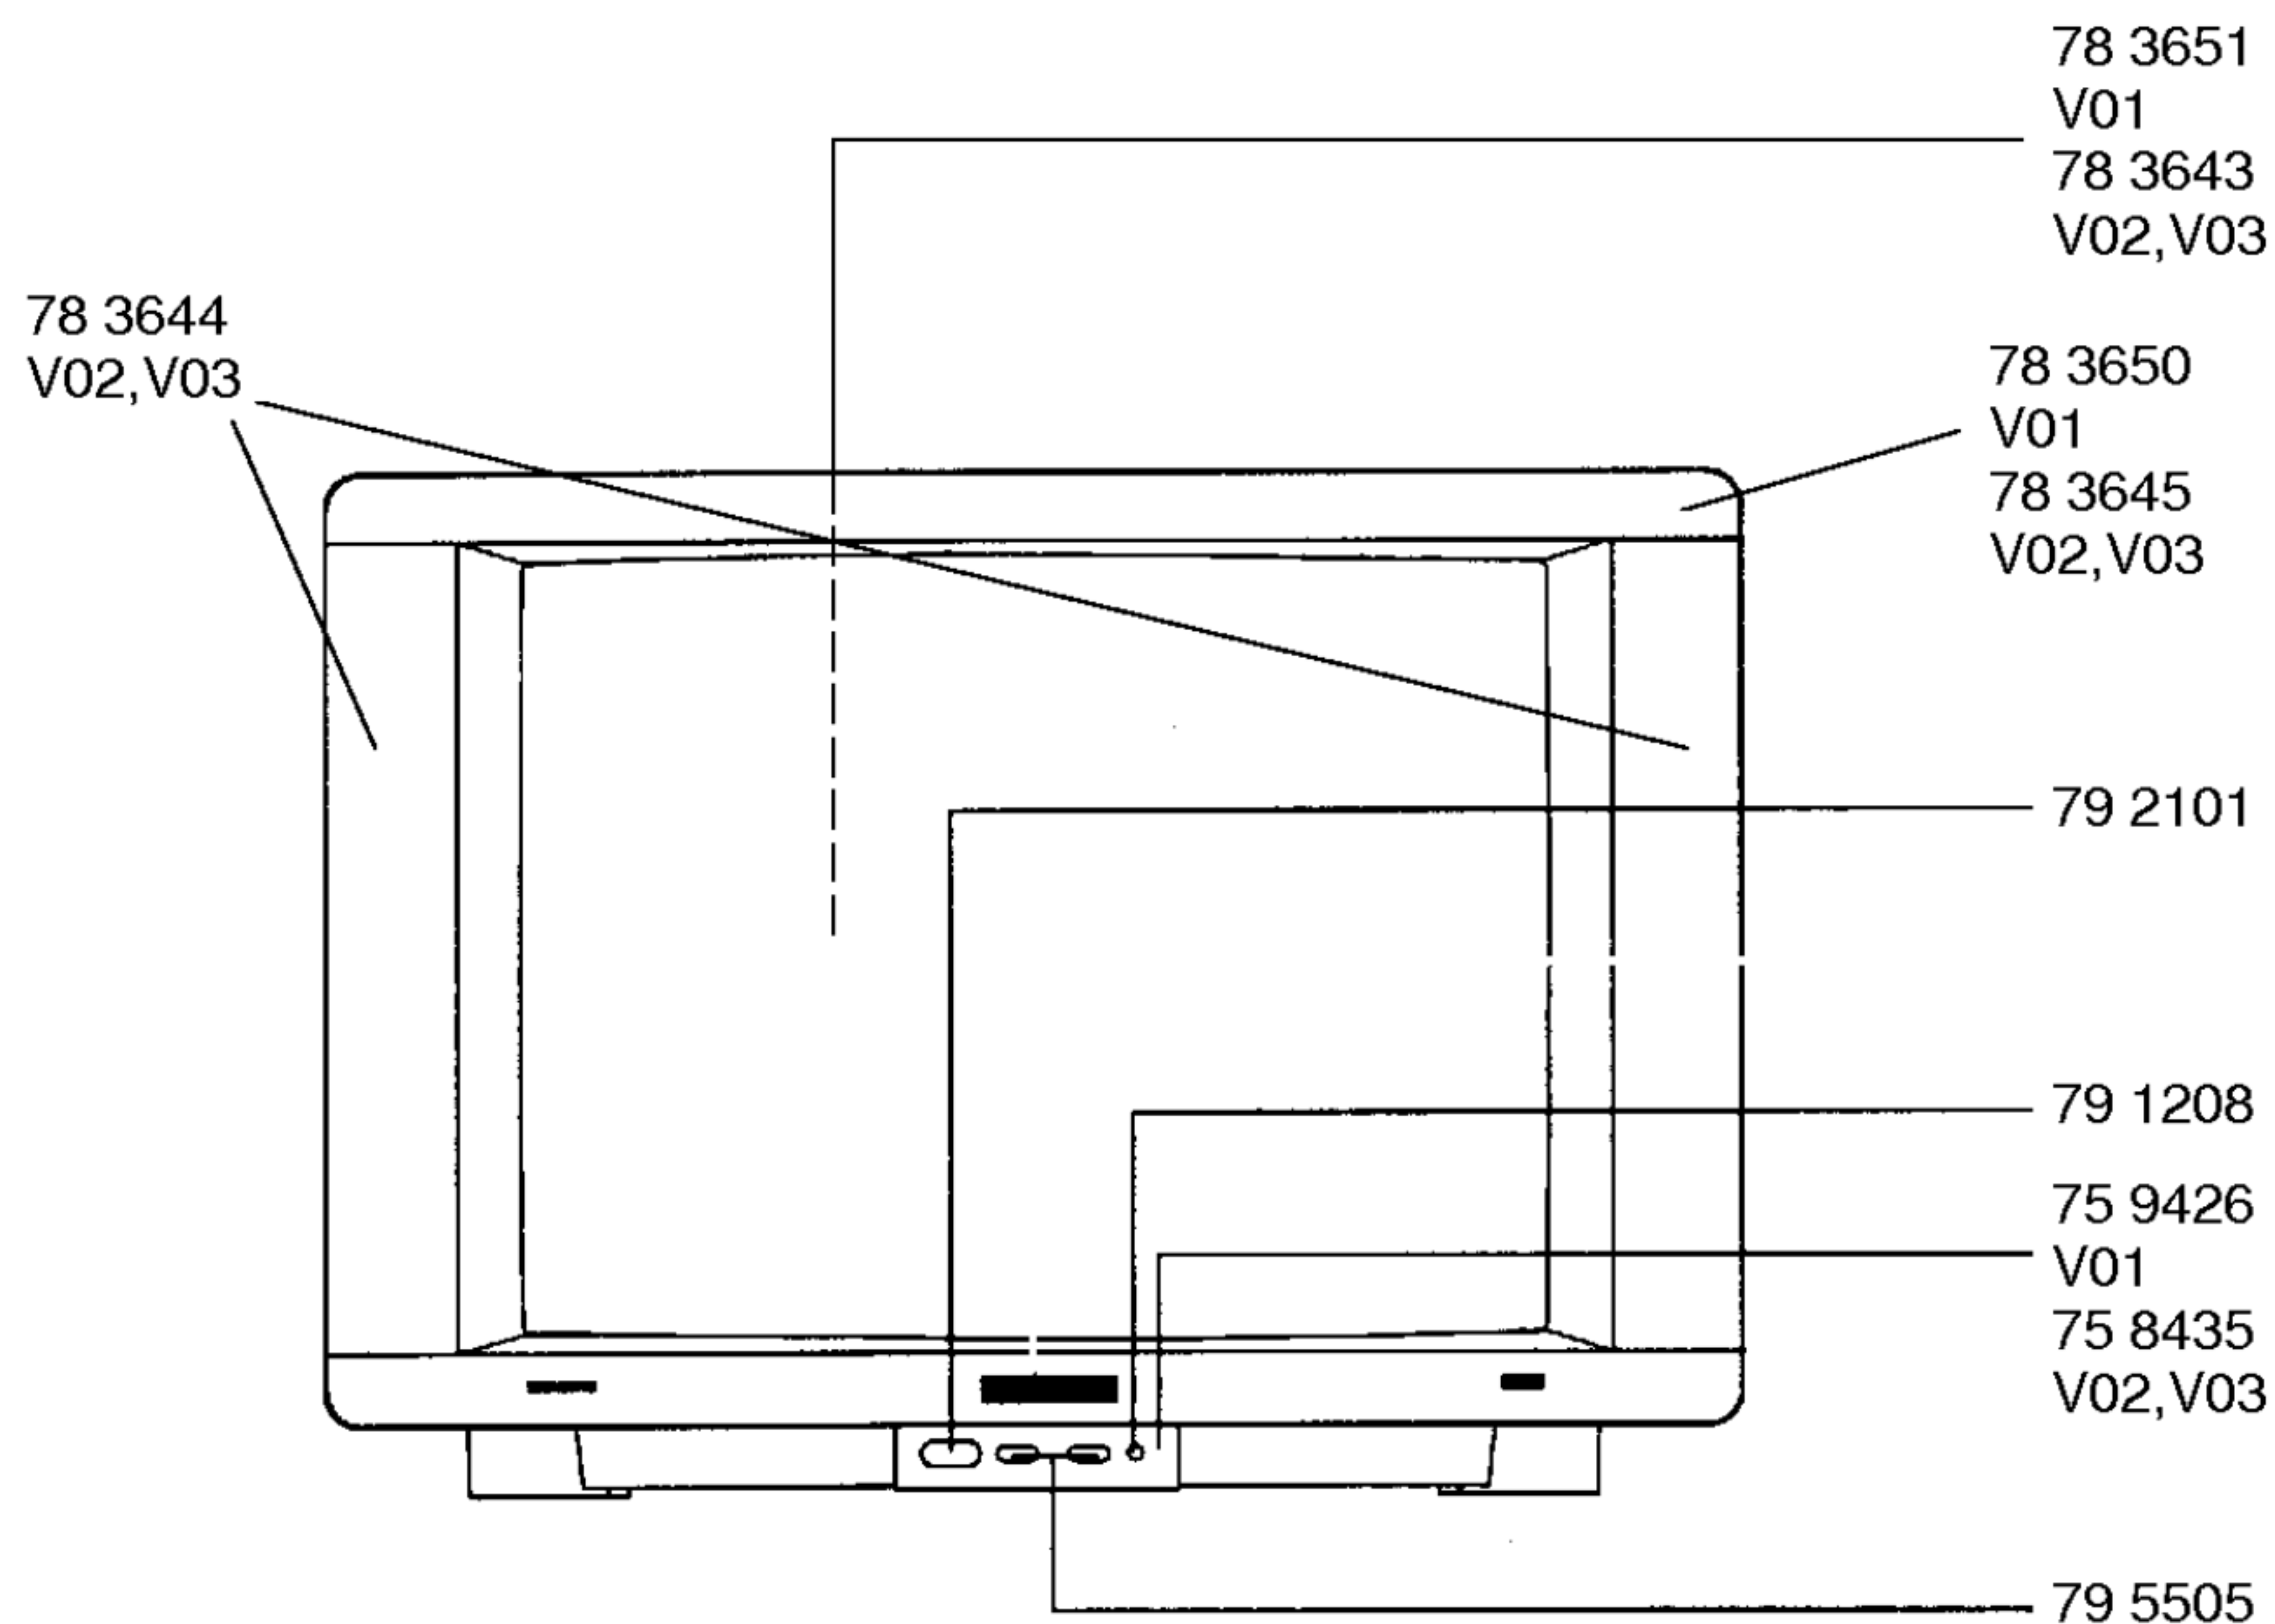

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
!	75 6674	Hochspannungskabel mit Anoden- kappe	high tension lead
	75 7961	Lautsprecher Breitband	speaker
		Montageclip	Mounting clip
	73 2585	IC 730/750/770/40020	
	73 4175	T53001/60006	
	73 8333	D53071/53072/60006/61016/61001/61 006/61030/61040/61050	
	79 5154	T50029	
!	79 6924	Netz Einbaugerätestecker	part of main plug
!		Sicherheitsbauteil	safety part

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
CD21201	79 5262	SMD LS4148	
CD21202	79 5262	SMD LS4148	
CD21203	79 5262	SMD LS4148	
CD21206	79 6925	SMD BAV103	
CD32000	79 5262	SMD LS4148	
CD32031	79 5262	SMD LS4148	V03
CD32032	79 5262	SMD LS4148	V03
CD32041	79 5378	SMD BA582	V03
CD32042	79 5378	SMD BA582	V03
CD32043	79 5378	SMD BA582	V03
CD32044	79 5378	SMD BA582	V03
CD32047	79 5378	SMD BA582	V03
CD32048	79 5378	SMD BA582	V03
CD32315	79 6926	SMD Z 33 C 0,5W	
CD34033	79 5382	SMD Z 5,1 B 0,5W	
CD34513	79 5262	SMD LS4148	
CD34517	79 5262	SMD LS4148	
CD40007	79 5262	SMD LS4148	
CD40008	79 5543	SMD Z 3,3 C 0,5W	
CD41011	79 5262	SMD LS4148	
CD43084	79 5262	SMD LS4148	
CD53019	79 5262	SMD LS4148	
CD55003	79 6927	SMD Z 3,9 B 0,5W	
CD55004	79 5262	SMD LS4148	
CD58001	79 5262	SMD LS4148	
CD58004	79 5262	SMD LS4148	


Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
CD58007	79 6928	SMD Z 2,7 B 0,5W	
CD58011	79 5262	SMD LS4148	
CD58012	79 5262	SMD LS4148	
CD58021	79 5262	SMD LS4148	
CD58022	79 5262	SMD LS4148	
CD60201	79 5262	SMD LS4148	
CD60202	79 5262	SMD LS4148	
CD60223	79 5262	SMD LS4148	
CD70501	79 5382	SMD Z 5,1 B 0,5W	
CD70506	79 5262	SMD LS4148	
CD70507	79 5262	SMD LS4148	
CD70517	79 5262	SMD LS4148	
CD70553	79 5262	SMD LS4148	
CD80081	79 5262	SMD LS4148	
CD81004	79 5262	SMD LS4148	
D703	79 5903	Z3,3 B 0,5W	
D756	73 9410	1N4148	
D21212	73 3293	1N4004	
D32356	70 9579	1N4002	
D32357	70 9579	1N4002	
D40006 !	73 9323	1N4001	
D40009	73 9410	1N4148	
D50013	79 0842	BYV28–200	
D52003	73 9410	1N4148	
D52006	73 9323	1N4001	
D53008	79 0134	BA157	
D53019	79 6932	ZZY51	
D53071	79 0843	BY359	
!		Sicherheitsbauteil	safety part

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
D53072	79 4330	BY229–600	
D54001	73 4310	1N4936	
D55012	79 4329	Z 33 C 0,5W	
D60006	79 0845	MUR880	
D60012	79 3889	BYT53B	
D60014	73 9325	BAV21	
D60023	73 5240	GLR.B380C3700/2200	
D60203	79 6795	Z 9,1 B 0,5W	
D60207	73 9323	1N4001	
D60208	73 9323	1N4001	
D60221	73 0501	BA159	
D60222	79 6933	BZT03D180	
D61001	79 3889	BYT53B	
D61011	73 9340	BYV38TFK	
D61012	73 9340	BYV38TFK	
D61016	79 0845	MUR880	
D61021 !	79 3890	BYW172D	
D61026	73 7714	MUR840	
D61033	73 9323	1N4001	
D61036	73 7714	MUR840	
D61056	73 7714	MUR840	
D61061 !	79 3890	BYW172D	
D61062	70 9740	1N4003	
D61066 !	79 3890	BYW172D	
D61067	70 9740	1N4003	
D70508	79 5523	Z 15 B 0,5W	
D81501	73 9410	1N4148	
D85001	79 2359	TLHR4601TFK	

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
CIC32030	79 5997	SMD MC14094BD	V03
CIC32300	79 6929	SMD MSP3400C	V01,V02
CIC32300	79 6967	SMD MSP3410	V03
CIC43010	79 6930	SMD MC14551BD/R2	
CIC80050	79 6931	SMD SDA5250–100	
IC730	79 4328	TDA6111N4	
IC750	79 4328	TDA6111N4	
IC770	79 4328	TDA6111N4	
IC32040	79 5661	TDA4460B	V01,V02
IC32040	79 6663	TDA4474	V03
IC32310	73 2770	78 M 05 2%	
IC34020	79 6934	TDA9141	
IC34030	79 5166	TDA 4665	
IC34510	79 5540	TDA 4780 V3	
IC40010	72 4321	LM 393P	
IC40020	79 2031	TDA7262 / TDA3009S	
IC41010	79 6468	TDA3006 SMI	
IC43080	79 2743	TEA6415B / TEA6415C	
IC50010	79 4815	TDA 4173 AF	
IC55010	73 2562	TDA 8145	
IC58010	72 4321	LM 393P	
IC60010	79 2343	TDA 4605/3	
IC61001	73 4089	LM 317 T	
IC61006	73 4089	LM 317 T	
IC61030	73 4089	LM 317 T	
IC61040	79 2345	LM 350 T	
IC61050	73 4089	LM 317 T	
IC61310	73 7071	LM 358 N	
IC80040	79 2674	MC 33164 P–5RP	

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
IC80060	* 79 6935	27C020–15NS PROG.KPL	
IC80065	79 2336	24 C 08	
IC80070	79 6936	X24C02P XICOR/ ST24W0	
IC84001	79 2339	TFMS 5300 (STEHEND)	
			
CT32026	73 0790	SMD BC848B	V03
CT32061	73 0790	SMD BC848B	V03
CT32062	73 0790	SMD BC848B	V03
CT32063	73 0790	SMD BC848B	V03
CT32064	73 0790	SMD BC848B	V03
CT32104	73 0790	SMD BC848B	V01,V02
CT32105	73 6908	SMD BC857B	V03
CT32111	73 0790	SMD BC 848 B	
CT32119	73 0790	SMD BC 848 B	
CT32122	73 6908	SMD BC857B	V03
CT32123	73 0790	SMD BC848B	V03
CT32124	73 6908	SMD BC857B	
CT32125	73 0790	SMD BC848B	V03
CT32128	73 0790	SMD BC848B	
CT32132	73 0790	SMD BC848B	V03
CT32134	73 6908	SMD BC857B	V03
CT32251	73 0790	SMD BC848B	V01,V02
CT32251	73 3239	SMD BFS20 / ON4158	V03
CT32308	73 6908	SMD BC857B	
	*	bei SAT–Baustein Softwarestand ≥ 10	software version ≥ 10 in the case SAT–Modul

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
CT32310	73 6908	SMD BC857B	
CT32312	73 6908	SMD BC857B	
CT32315	73 6908	SMD BC857B	
CT34045	73 0790	SMD BC848B	
CT34050	73 6908	SMD BC857B	
CT34055	73 0790	SMD BC848B	
CT34060	73 0790	SMD BC848B	
CT34065	73 6908	SMD BC857B	
CT34075	73 0790	SMD BC848B	
CT34080	73 6908	SMD BC857B	
CT43060	73 0790	SMD BC848B	
CT43088	73 0790	SMD BC848B	
CT43089	73 6908	SMD BC857B	
CT43091	79 4915	SMD BC858A	
CT43092	73 0790	SMD BC848B	
CT43093	73 0790	SMD BC848B	
CT43094	73 0790	SMD BC848B	
CT43095	73 0790	SMD BC848B	
CT46005	73 0790	SMD BC848B	
CT58012	73 0790	SMD BC848B	
CT60203	73 0790	SMD BC848B	
CT60206	79 2663	SMD BC857C	V01,V02
CT60206	79 3466	SMD BC858C	V03
CT60213	73 6908	SMD BC857B	
CT61301	73 0790	SMD BC848B	
CT61316	73 0790	SMD BC848B	
CT70505	73 0790	SMD BC848B	
CT80085	73 6908	SMD BC857B	
CT81001	73 0790	SMD BC848B	

Pos. Item Pos.	Ident-Nr. Ident-No N°d'ident	Bezeichnung	Designation Désignation
			
CT81004	73 0790	SMD BC848B	
T21211	73 7896	S298T/PBF259	
T40010	79 5194	BC368	
T50028	79 4339	BD538	
T50029	79 4338	BD537	
T52003	79 5252	BDX43	
T53001	79 4340	2SC4542	
T60006	73 7946	IRFPC50	
T60223	73 5487	BUZ90A	
T81501	73 2803	BC875/877/879	
T81502	79 5905	BC549B	
			
C6001 !	79 4686	0,22 µF 20% 250VW	
C40013	79 5752	2200µF 20% 35V	
C53012	79 5389	142pF 2,5% 2000V	
C53071	73 7746	9000pF 3,5% 2000V	V01
C60009	79 4265	220pF 10% 1600V	
C62021 !	73 5980	2200µF 20% 400V	
C62022 !	73 5980	2200µF 20% 400V	
C62048 !	73 7060	2200µF 20% 400V	
C722	73 4223	0,01 µF 20% 1500V	
!		Sicherheitsbauteil	safety part