



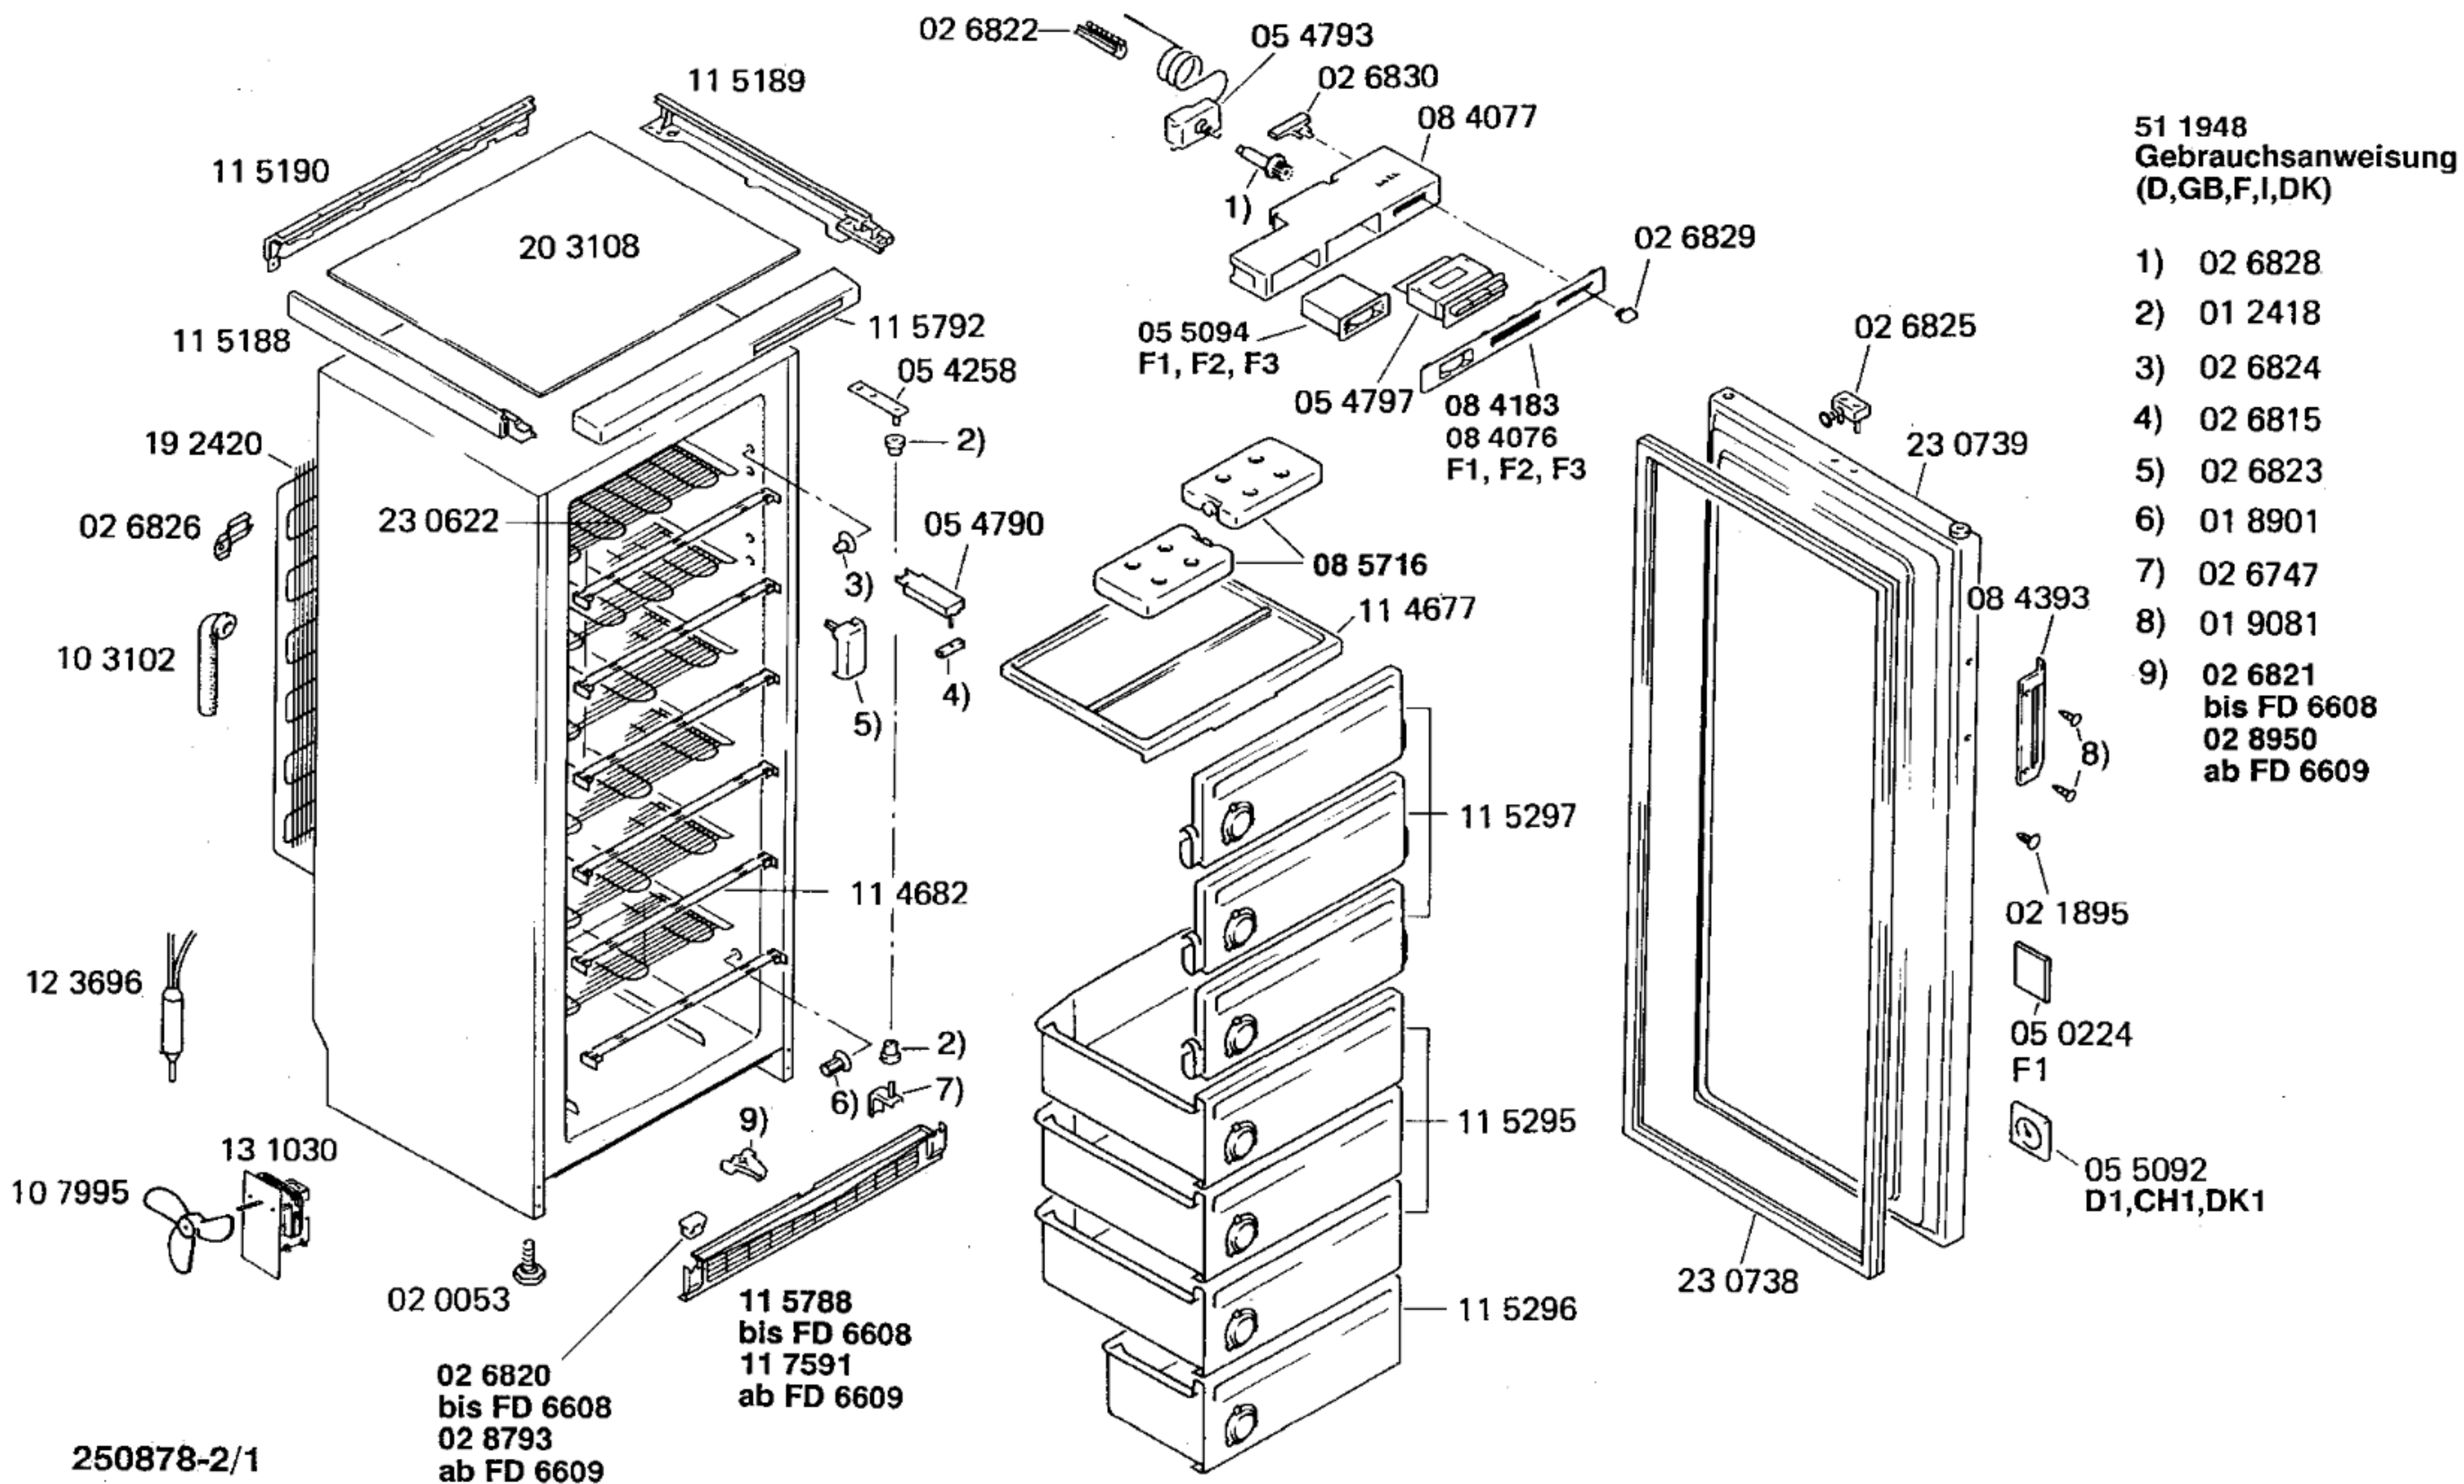

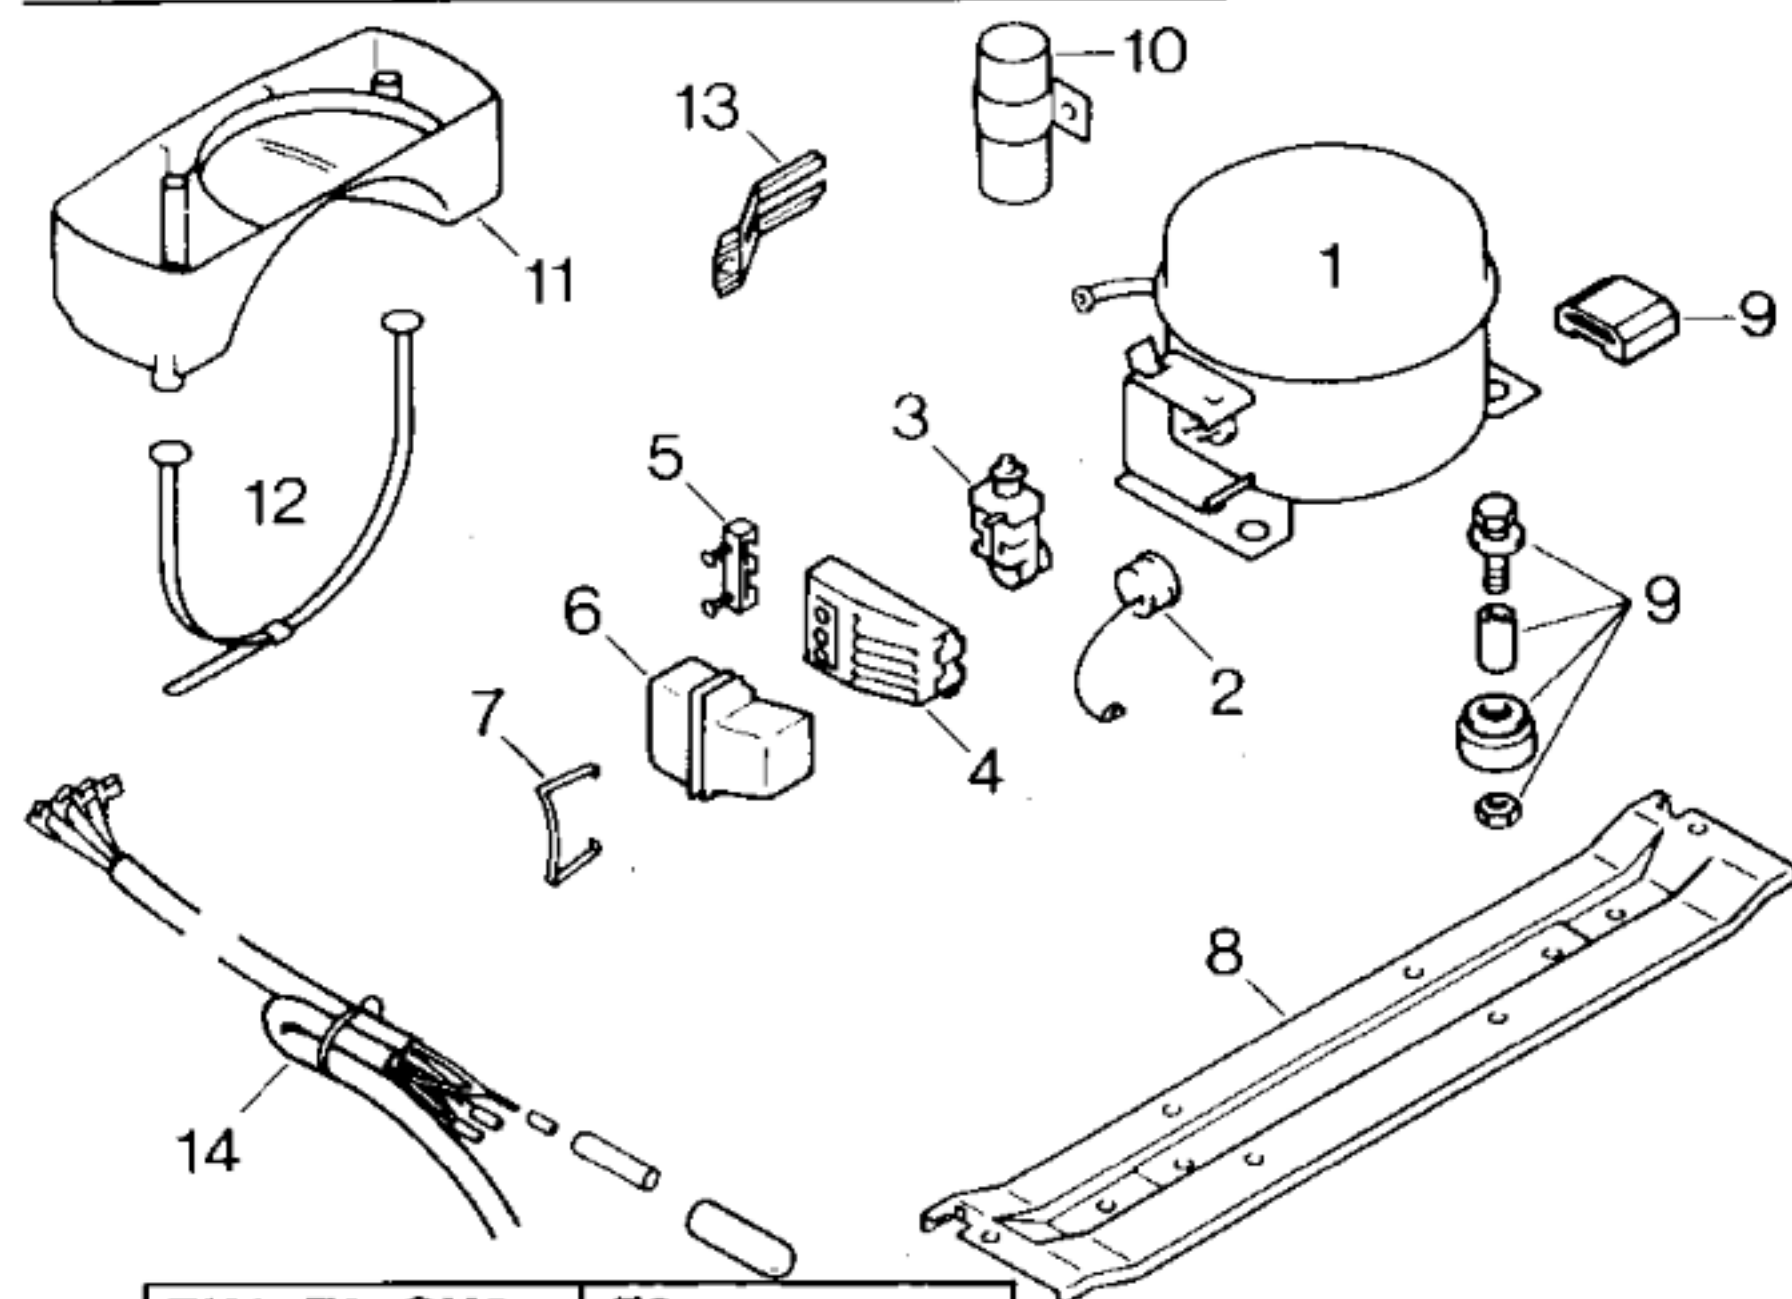

Pos.	EU1, F3, CH3	F2		
	CH1, F1, EU3	DK1, EU2, CH2		
	Aspera	Danfoss		
1	14 0312	14 0157		
2	02 6559			
3	02 2342	02 0108		
4	05 1748			
5		02 1361		
6	05 1746	05 1413		
7	02 2339			
8				
9	05 0166			
10				
11				
12				
13				
14				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1116 A	FR 8,5 A		
Förderleistung/Delivery/Débit		l/h	1450	1430	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,9	10,3	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	11,7	12,2	
		Hi/aux Ω	37,7	13,7	
Temp.-Regler/Thermostat		Danfoss			
Typ/Type		077 B 2054			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	- 24 - 16		
Valeurs de commutation		„aus“	- 34 - 24		
		(„abtauen“ od.) „alarm“	- 19 - 12		
Füllmenge/Fill.quantity/Charge		R12 g	195		
Anschlußwert/Conn.load/Puiss. connectée		W	170		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			