



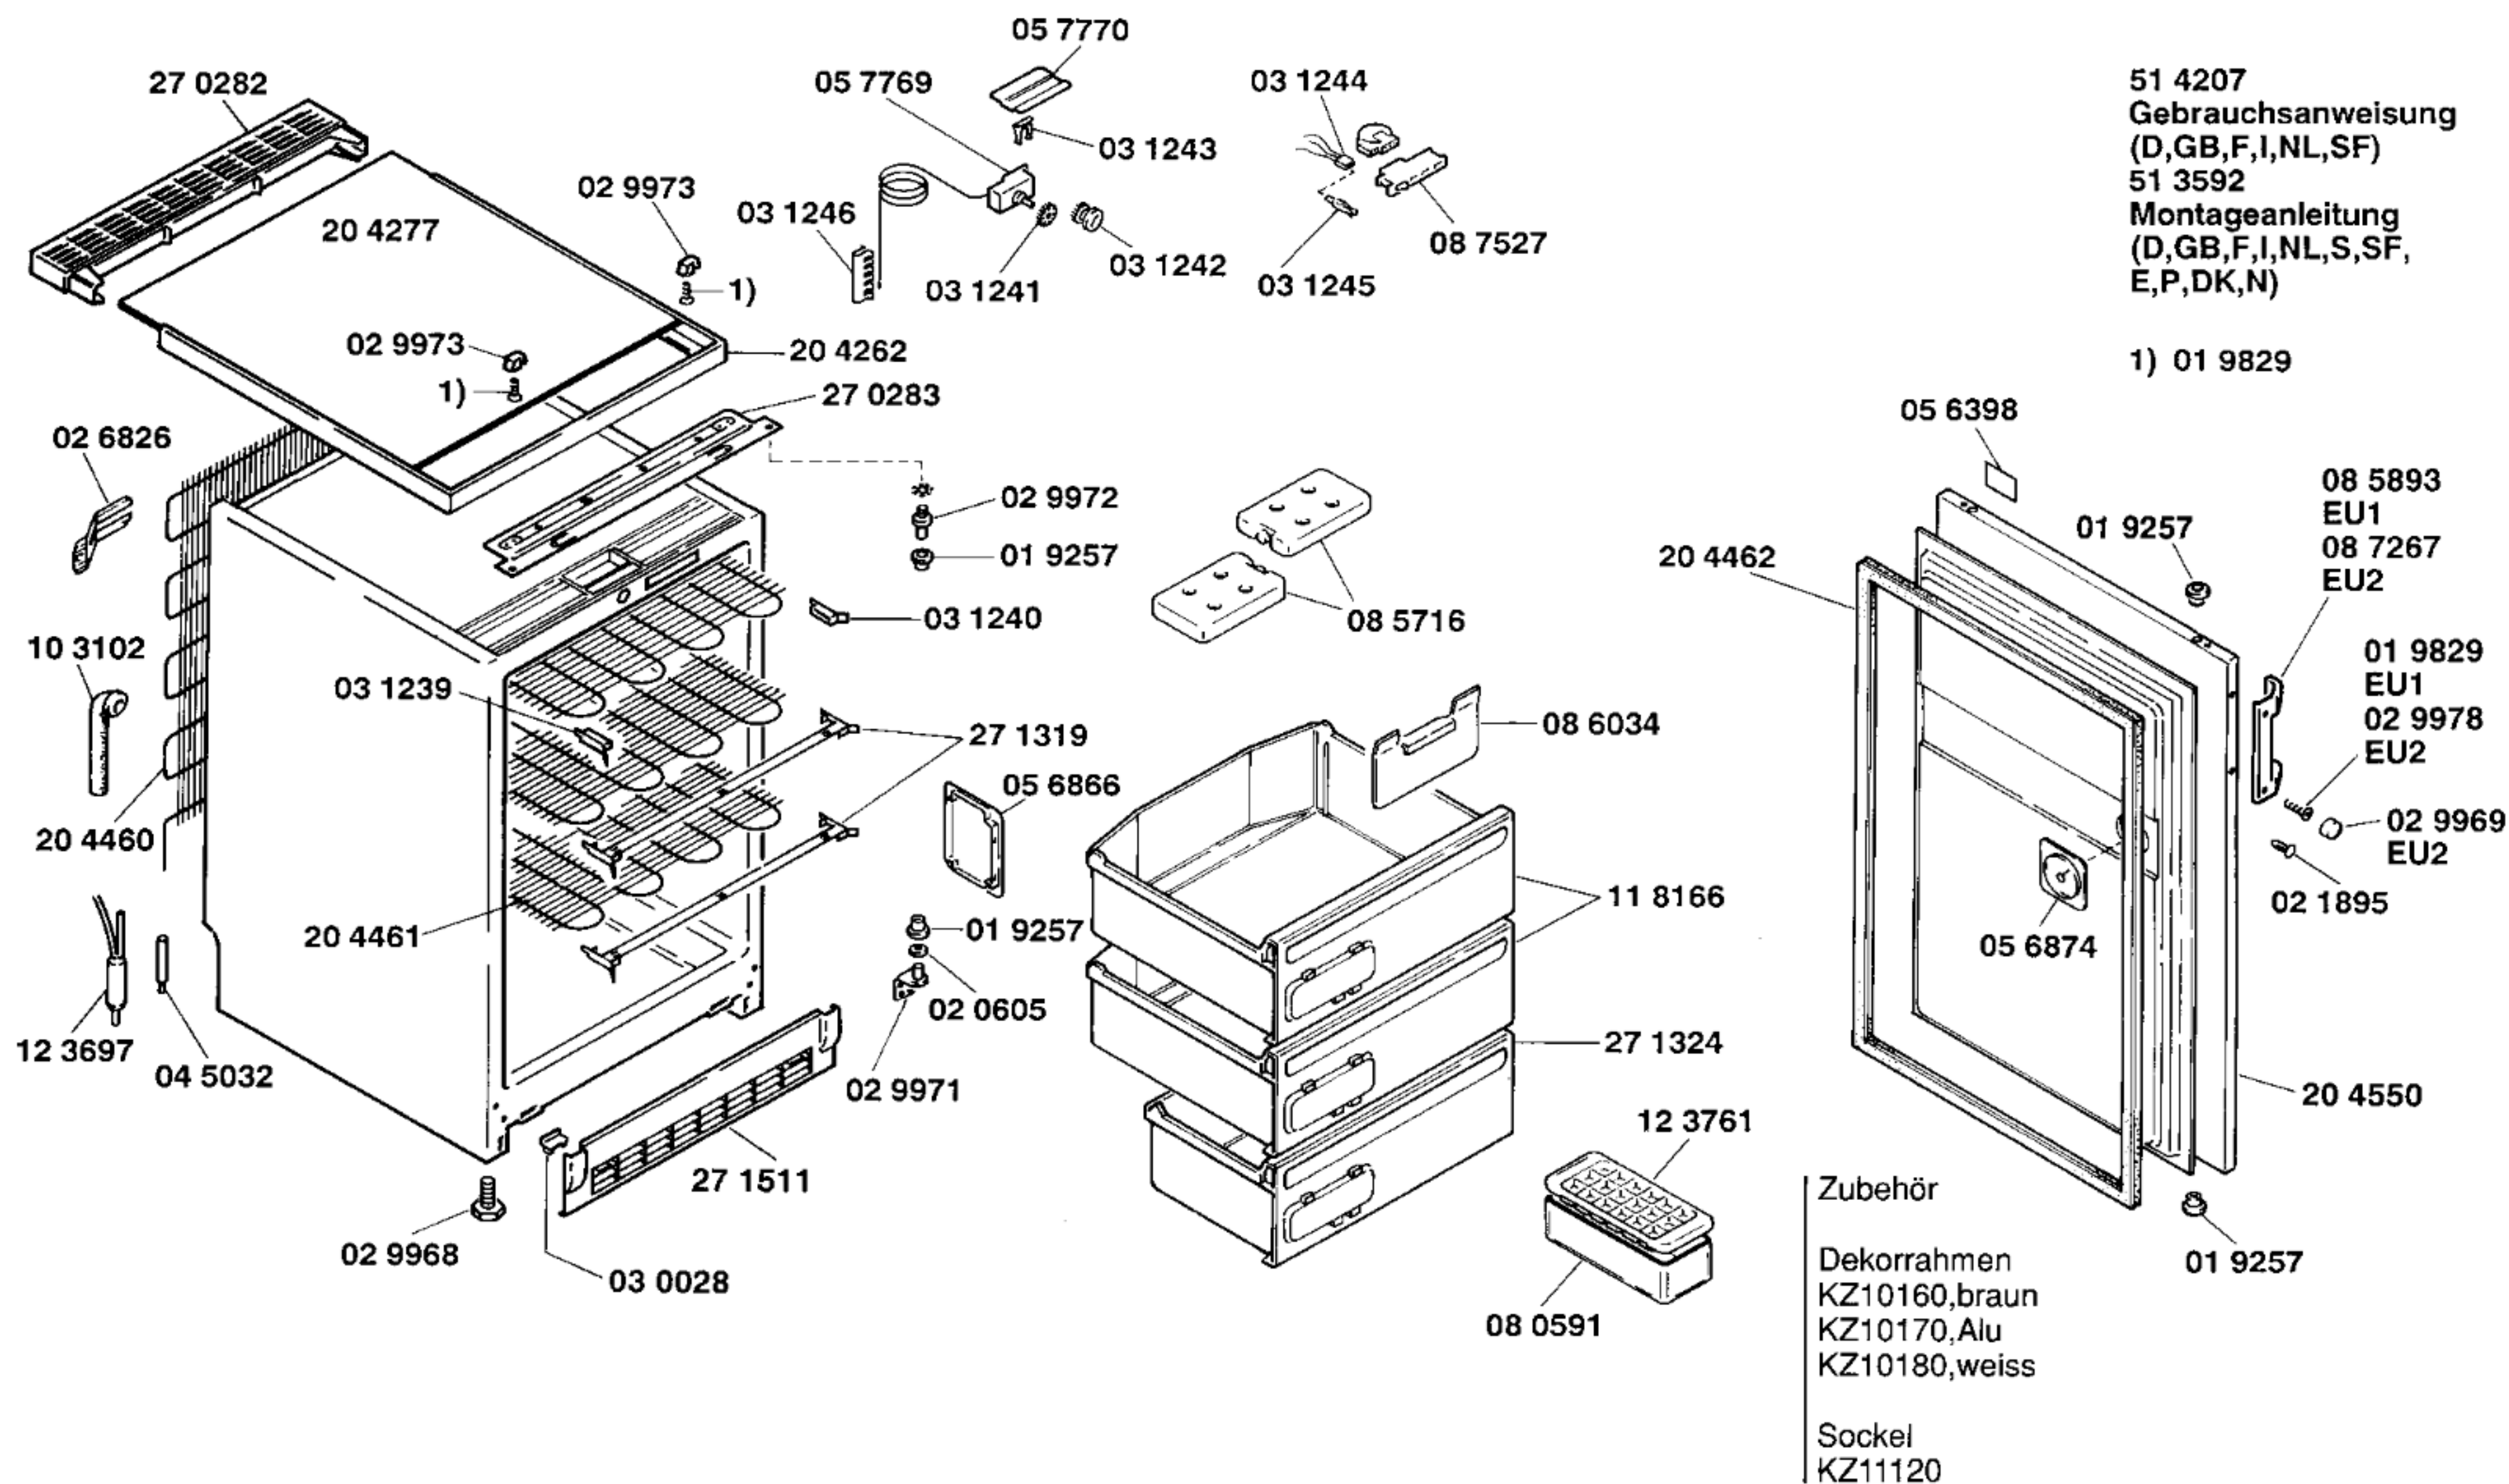

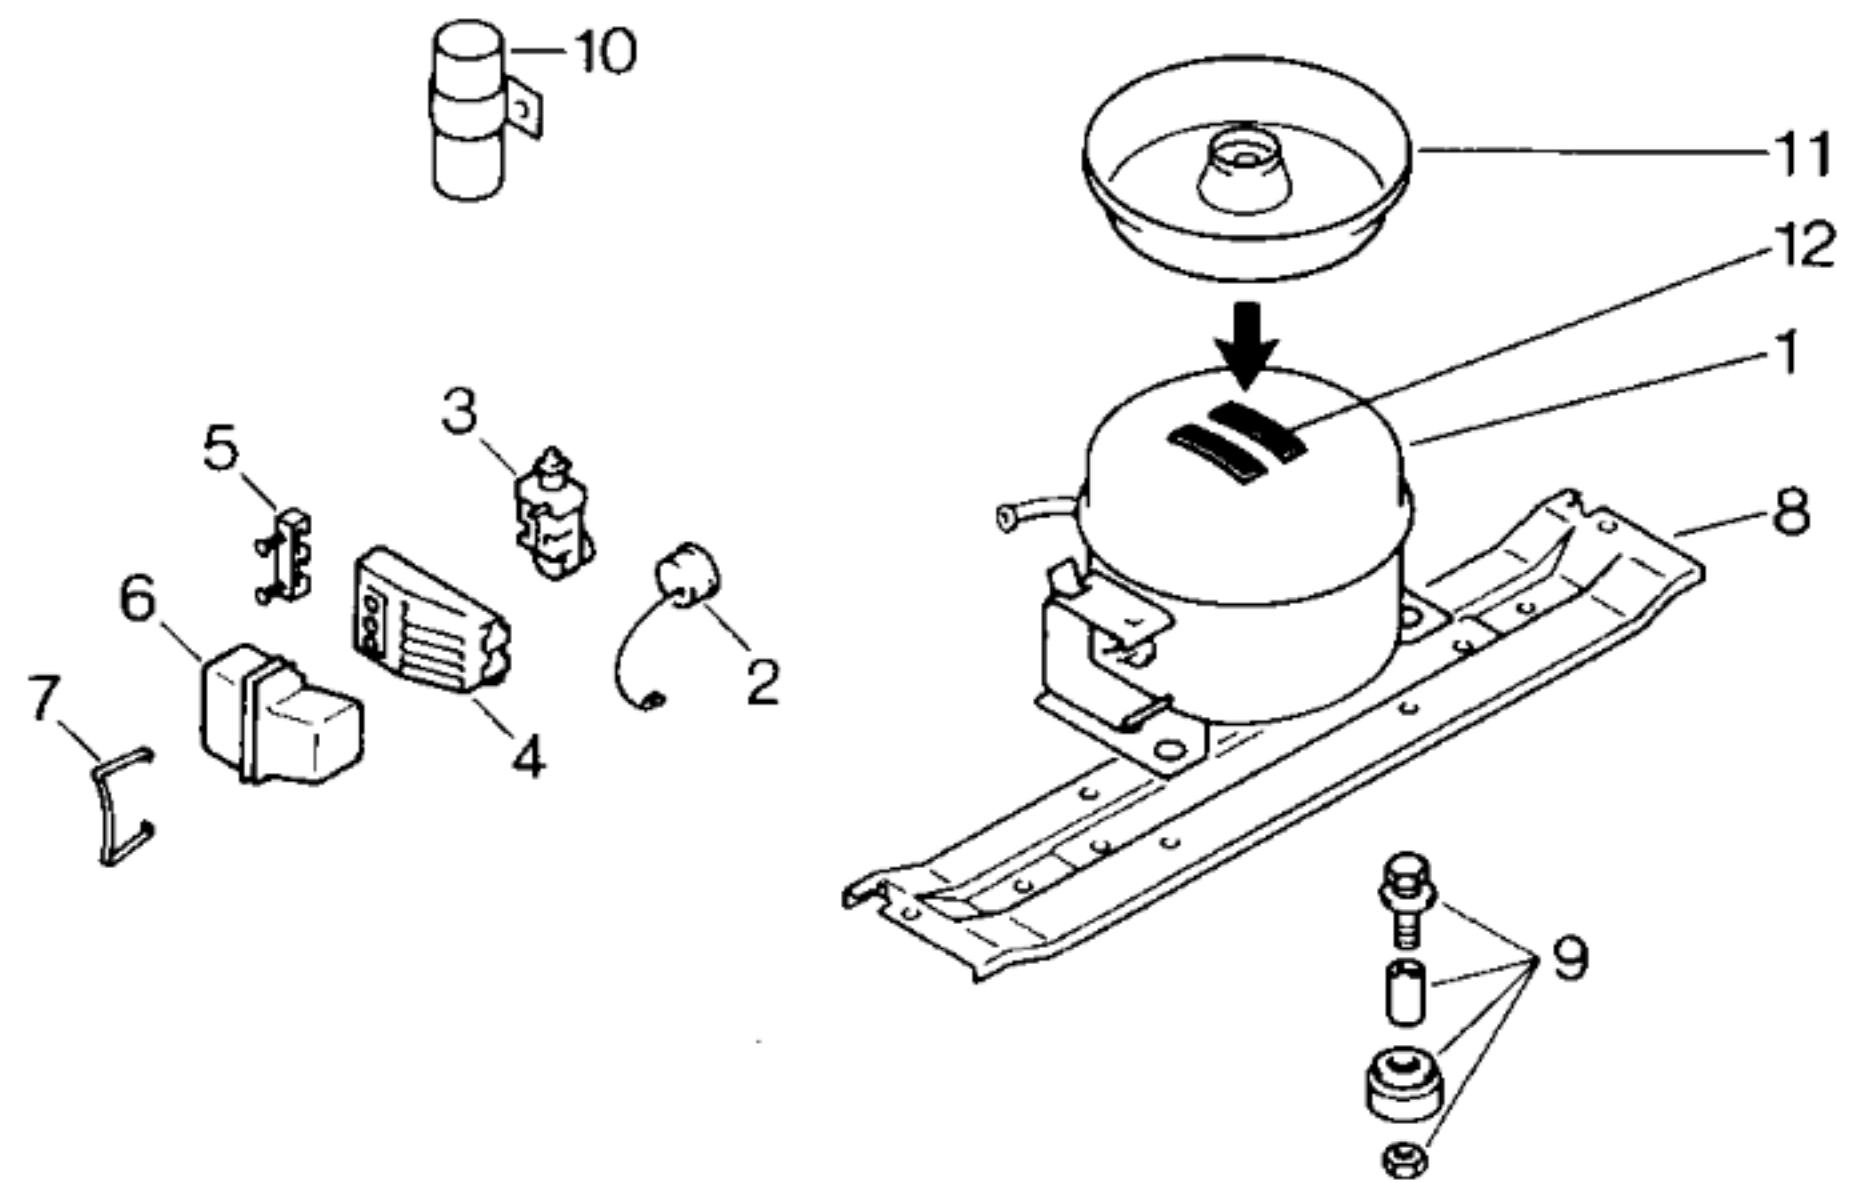

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera	Matsushita	
Typ/Type		BP 1111 A	S111LKAA	
Förderleistung/Delivery/Débit		l/h	1031	873
Anlaufstrom/Starting current/Cour. de démarrage		A	8,4	6,9
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	18,3
		Hi/aux	Ω	37,9
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 SF 2		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	°C	-25
		„aus“		-17
		(„abtauen“ od.)		-33
		„alarm“		-23
				-19,5
Füllmenge/Fill.quantity/Charge		R12	g	120
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	EU1, EU2	EU3	
	Aspera	Matsushita	
	BP 1111 A	S111LKAA	
1	14 0516	14 0571	
2	03 1238		
3	02 7424	03 2034	
4			
5	02 7425		
6	05 5145	05 8457	
7		02 6731	
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11			
12			