


SIEMENS


GS2090-EU1,EU2
GS209000/01-EU3
GS209000/02-EU4

GEFRIERGERÄTE
Gefrierschränke, Stand

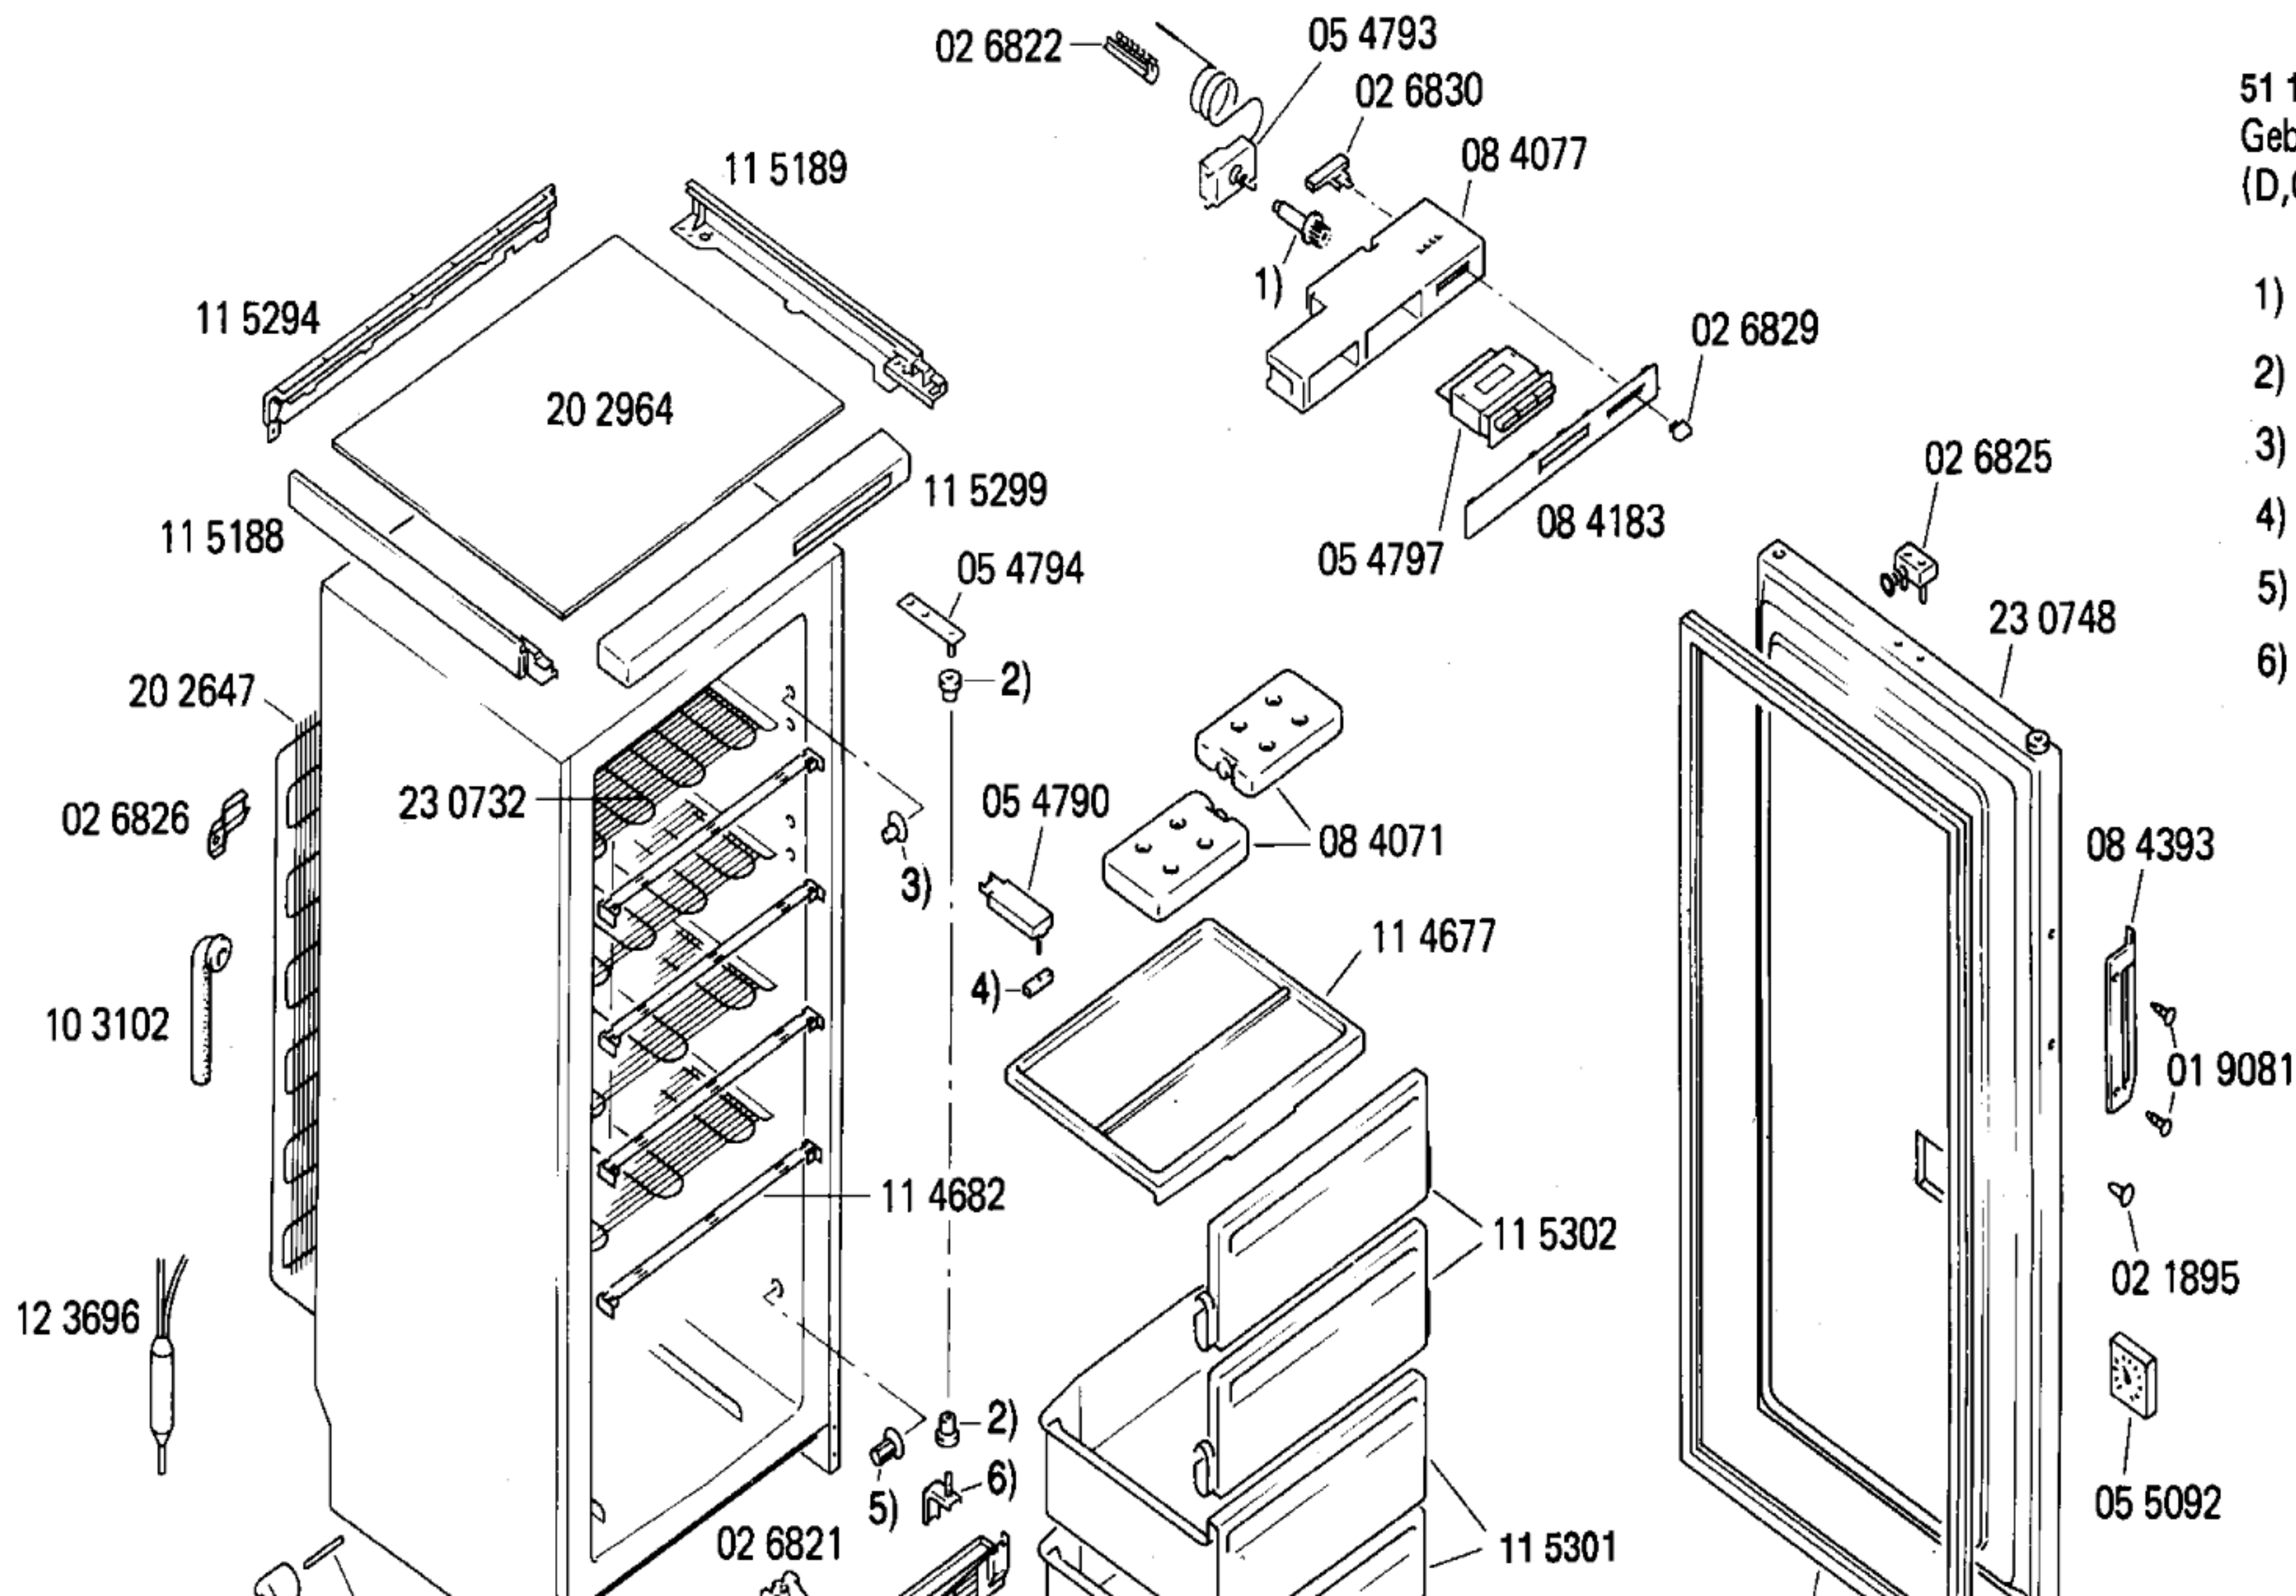

51 1948
Gebrauchsanweisung
(D,GB,F,I)

- 1) 02 6828
- 2) 01 2418
- 3) 02 6824
- 4) 02 6815
- 5) 01 8901
- 6) 05 4795

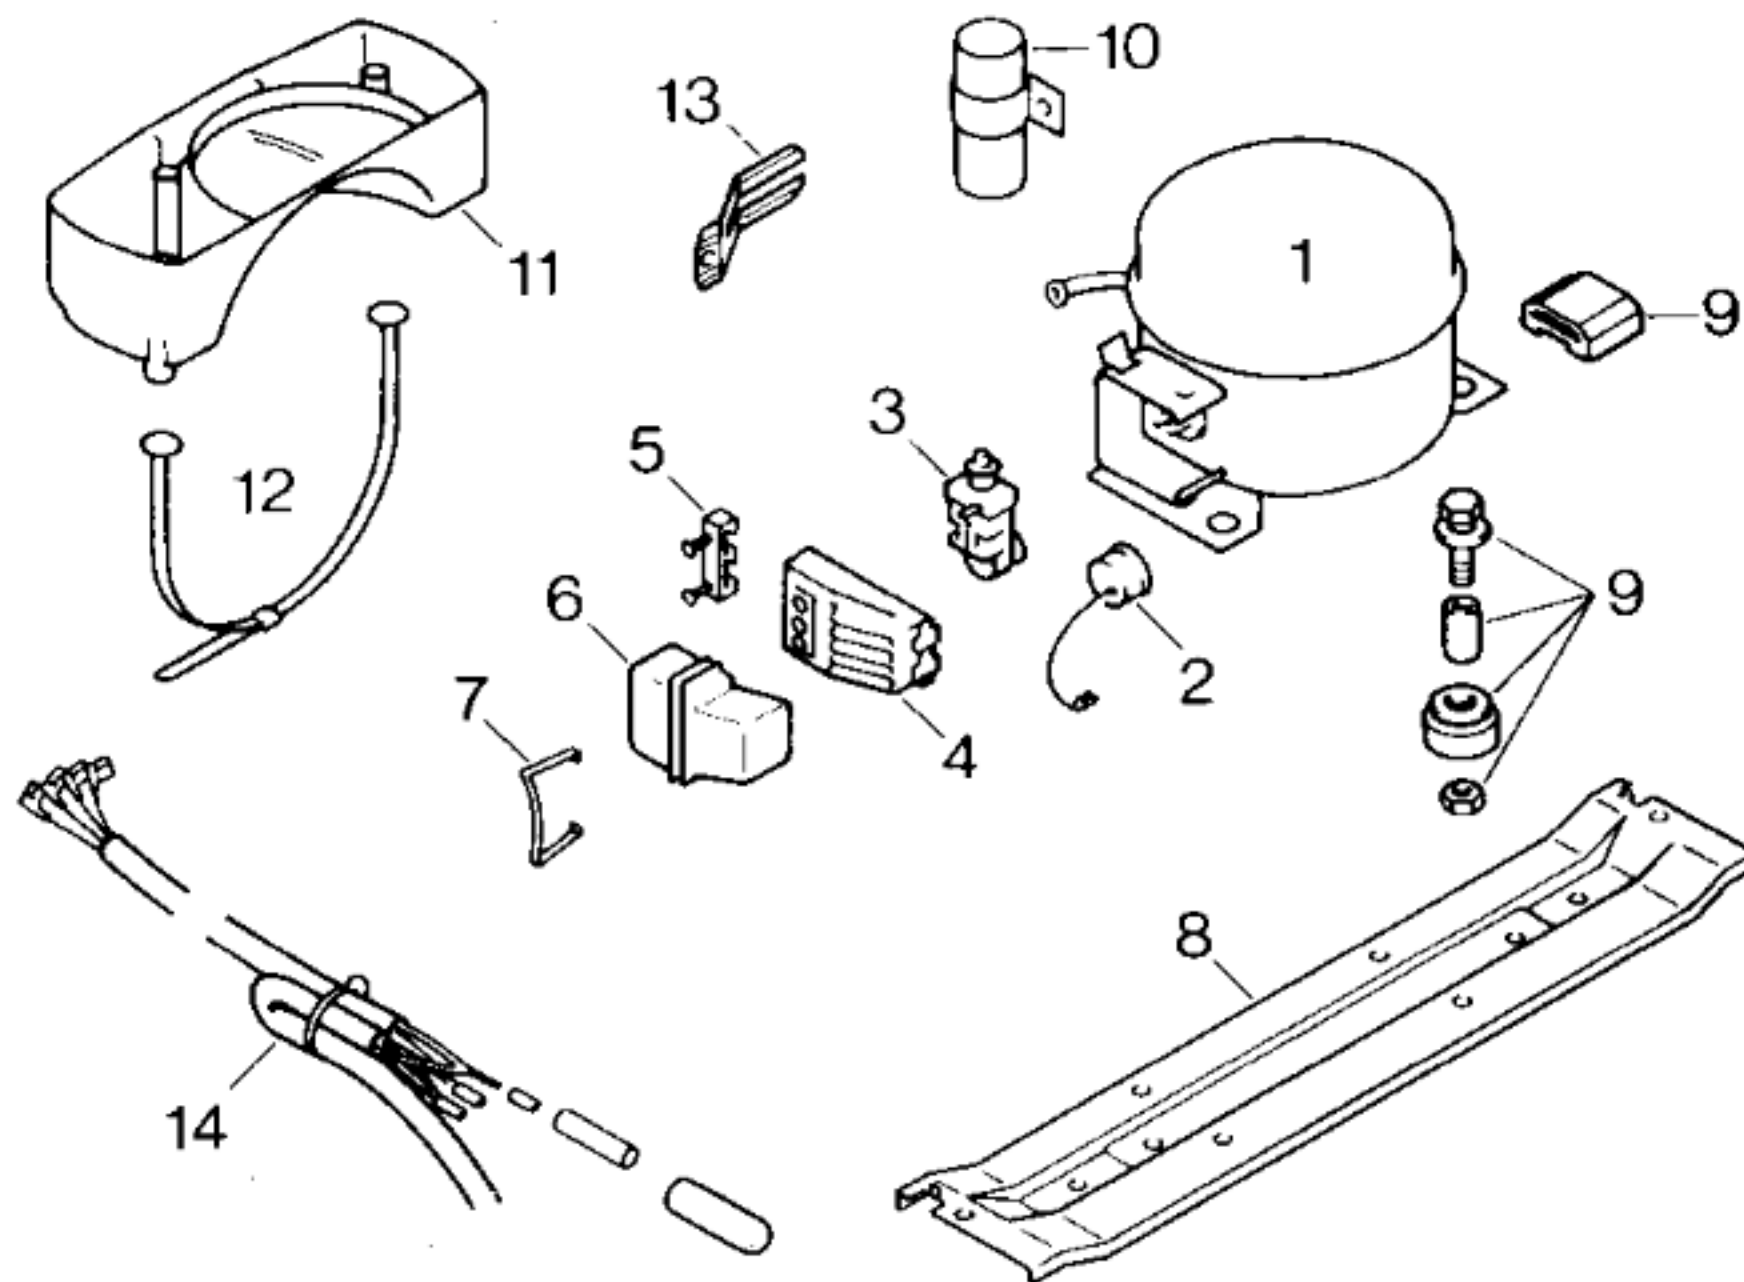

Pos.	EU1, EU3 Matsushita	EU2, EU4 Aspera
1	14 0362	14 0166
2		02 2337
3	02 7666	02 2342
4		05 1748
5		
6	05 4733	05 1746
7	02 6731	02 2339
8		
9	05 0166	
10		
11		
12		
13		
14		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Matsushita	Aspera		
Typ/Type		FN 66 Q11G.	BY 1112 A		
Förderleistung/Delivery/Débit	l/h	1184	1060		
Anlaufstrom/Starting current/Cour. de démarrage	A	7,9	8,5		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	11,8	17,9		
	Hi/aux Ω	40,1	43,7		
Temp.-Regler/Thermostat		Danfoss			
Typ/Type		077 B 2054			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	- 24	- 16		
Valeurs de commutation	„aus“	- 34	- 24		
(„abtauen“ od.)	„alarm“	- 19	- 12		
Füllmenge/Fill.quantity/Charge	R12	g	185		
Anschlußwert/Conn.load/Puiss. connectée		W	120		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω				
Leistung/Power/Puissance	W				
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				