



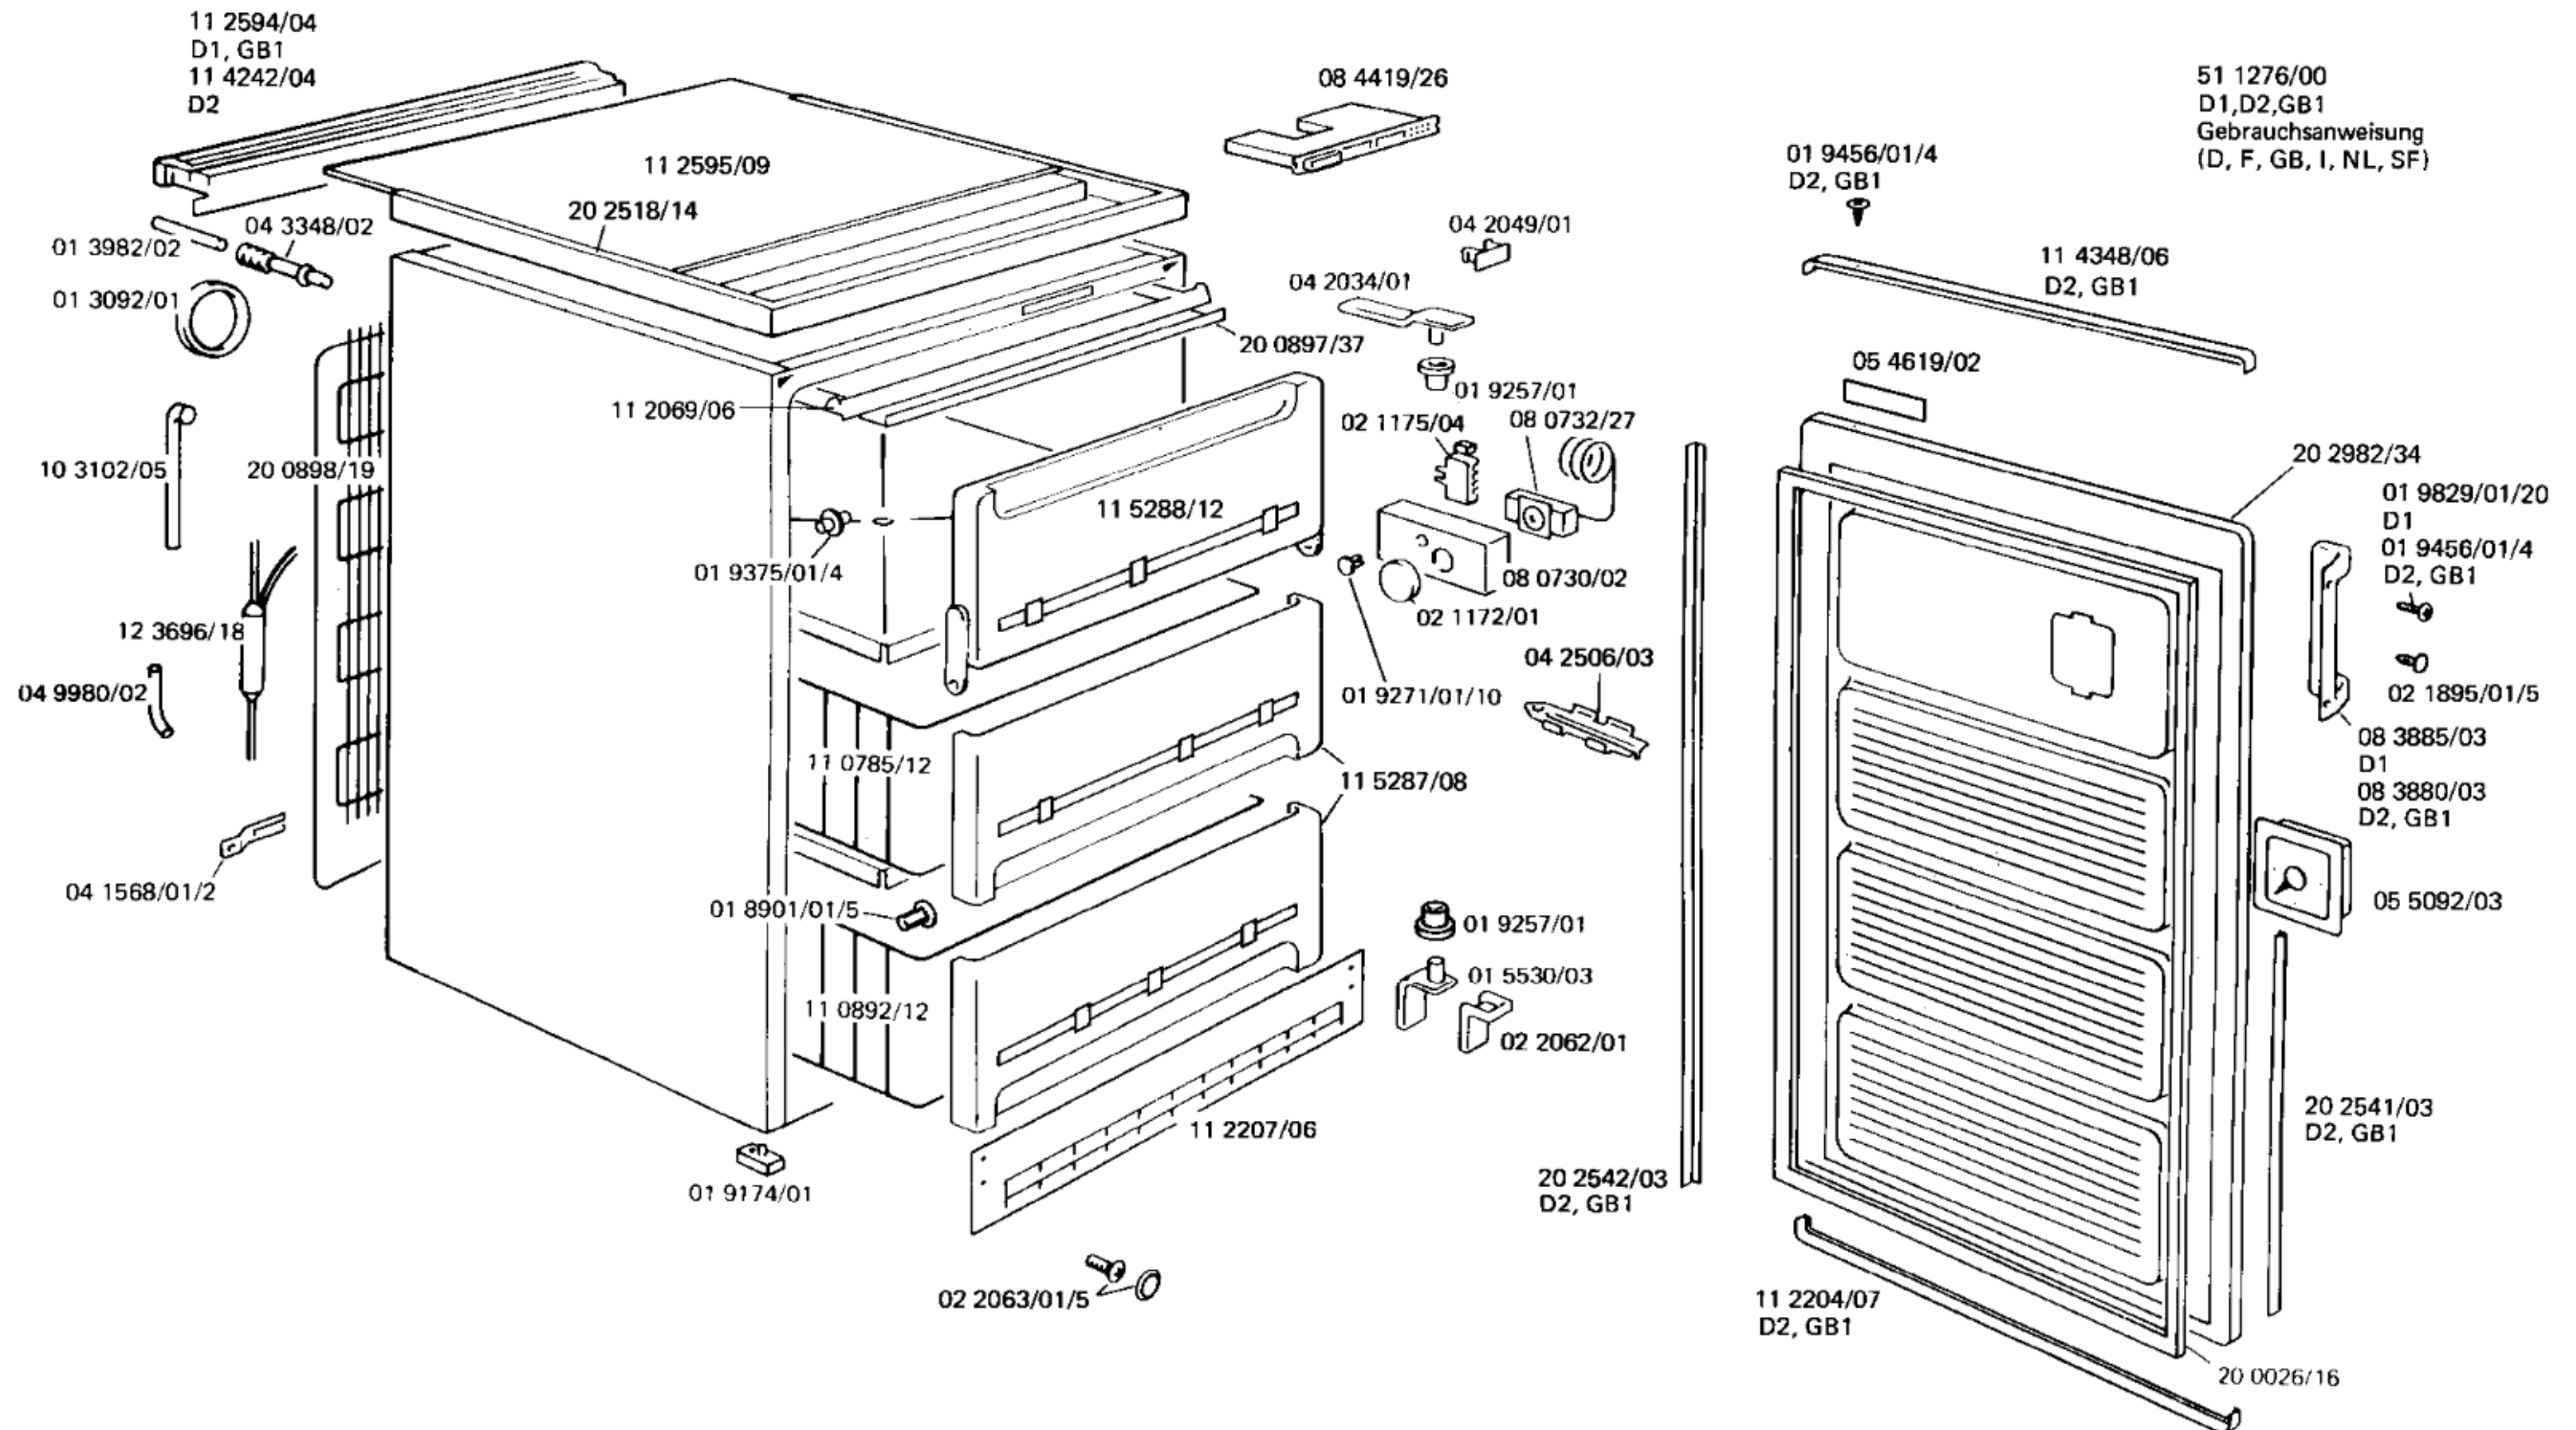

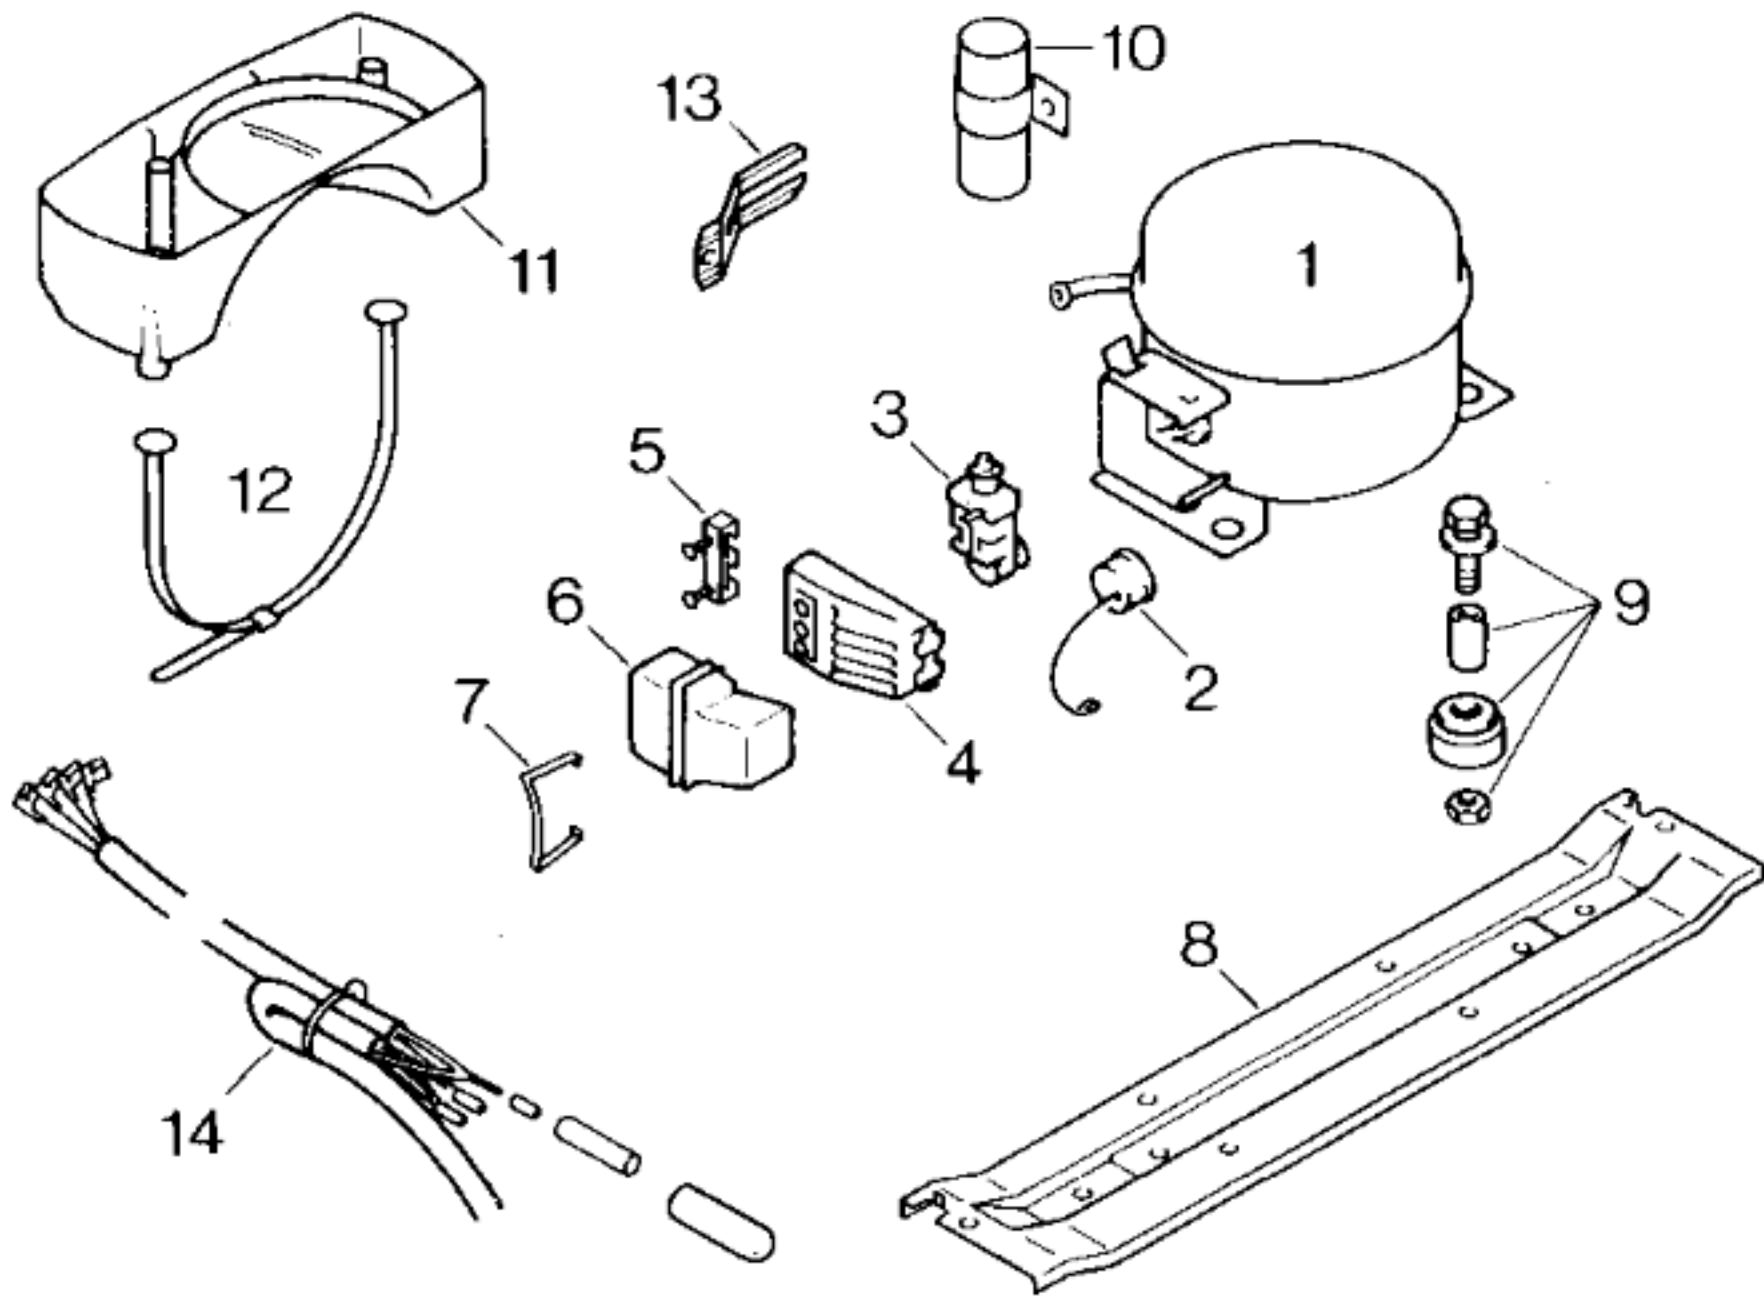

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera		
Typ/Type		BY 1112 A		
Förderleistung/Delivery/Débit		l/h	1060	
Anlaufstrom/Starting current/Cour. de démarrage		A	8,5	
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	17,9
		Hi/aux	Ω	43,7
Temp.-Regler/Thermostat		M + J		
Typ/Type		TF 57 SF		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	°C	- 29 - 21
		„aus“		- 36 - 26
		(„abtauen“ od.)	„alarm“	- 20 - 15
Füllmenge/Fill.quantity/Charge		R12	g	150
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	Aspera			
1	14 0166/45			
2	02 2337/16			
3	02 2342/16			
4	05 1748/06			
5				
6	05 1746/01			
7	02 2339/01			
8	11 1567/03			
9	05 0166/05			
10				
11				
12				
13				
14				