



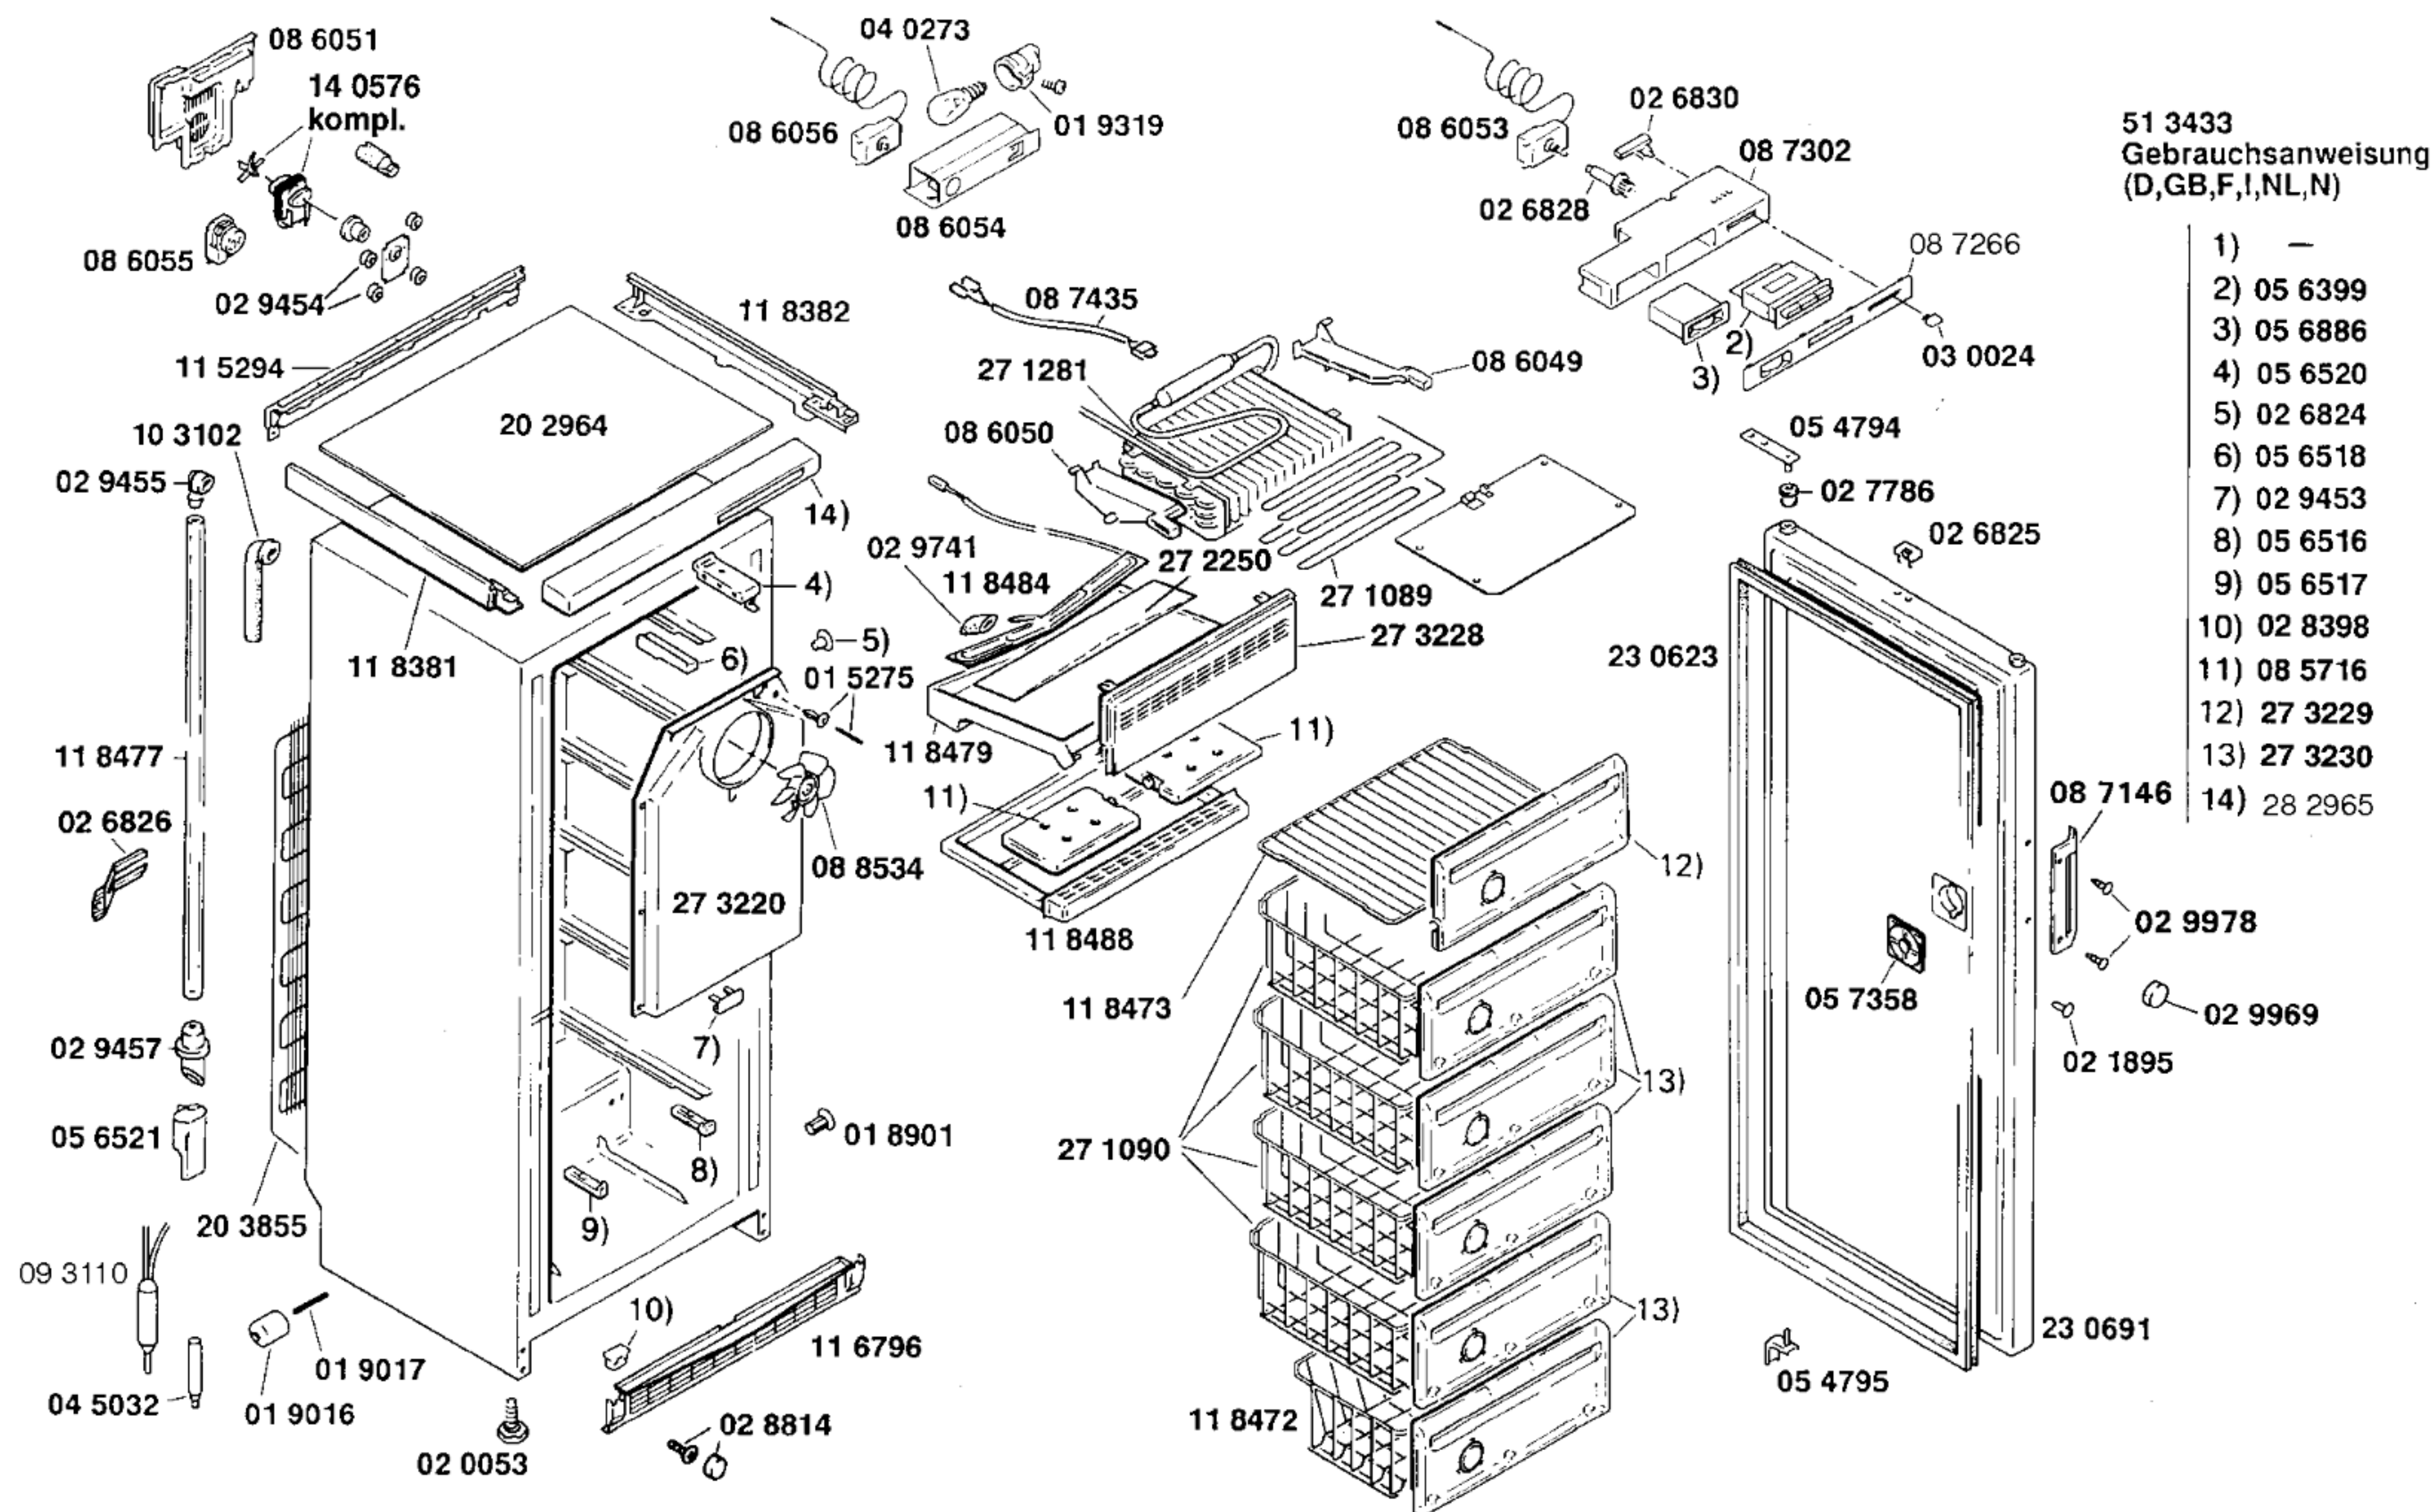

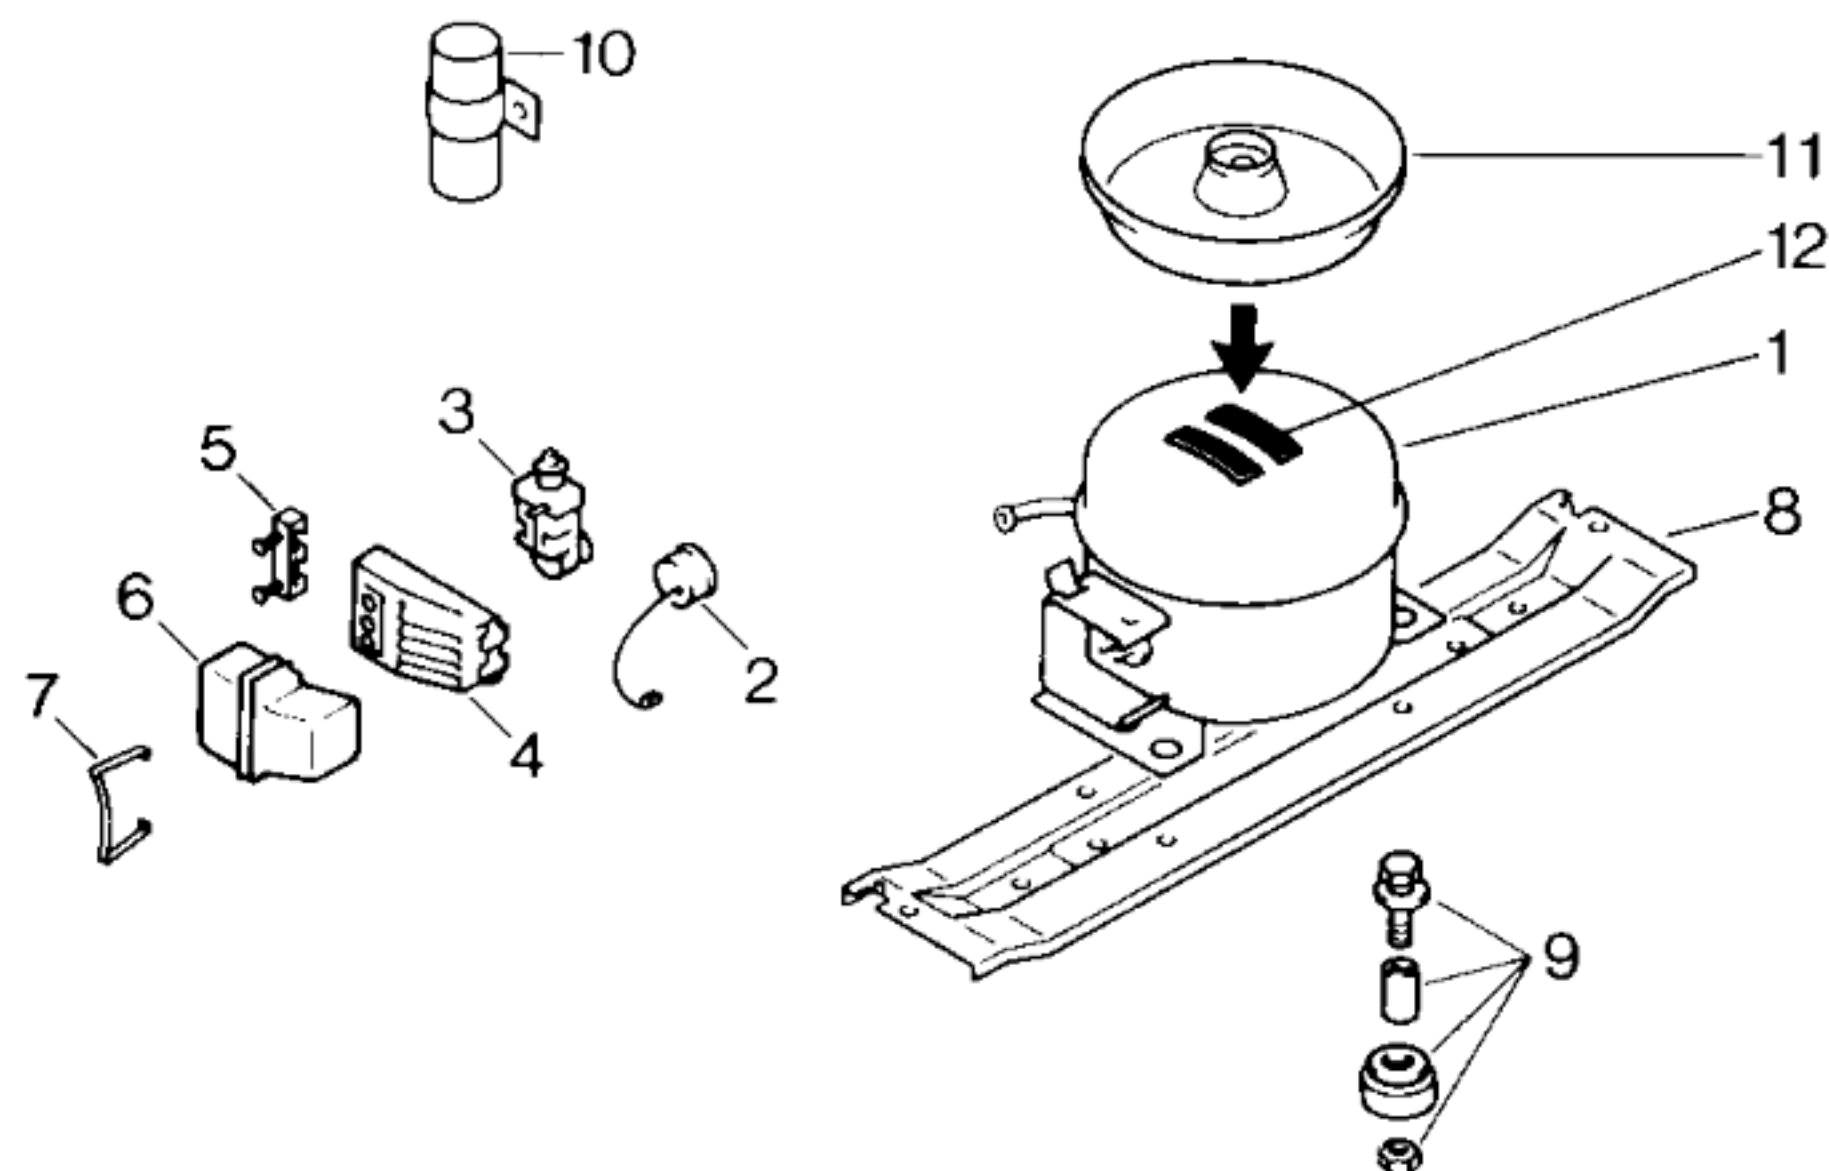

Pos.	EU1 Matsushita D115LRAA-M20	EU2 Aspera BY 1116 A	EU3 Matsushita D116LRAA-M26
1	14 0563	14 0460	14 0803
2	05 8506	02 6559	03 2748
3		02 9456	
4	05 5516	05 1748	05 5516
5			
6	05 8458	05 1746	05 8458
7	02 6731	02 2339	02 6731
8	27 3219	11 9114	27 3219
9	05 0166	05 0166	05 0166
10	05 8459	05 6524	05 8459
11	08 8535	08 6060	08 8535
12	05 6008	05 6008	05 6008

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur Typ/Type		Matsushita D116LRAA	Aspera BY1116A-BC	
Förderleistung/Delivery/Débit		l/h	1184	1450
Anlaufstrom/Starting current/Cour. de démarrage		A	8,75	9,9
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	12,0
		Hi/aux	Ω	28,7
Temp.-Regler/Thermostat Typ/Type		Danfoss 07780/091X4742	Ranco K 50 H 5658	
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	°C	-26,9
		„aus“		-18
		„abtauen“ od.)		-33,5
		„alarm“		-23
Füllmenge/Fill.quantity/Charge		R12	g	220
Anschlußwert/Conn.load/Puiss. connectée		W	150	
Heizung/Heater/Chauffage			Abtauheizung	Rinnenheizung
Widerstand/Resistance/Résistance		Ω	173	6050
		W	333	9,5
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	340	
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω	6500	