



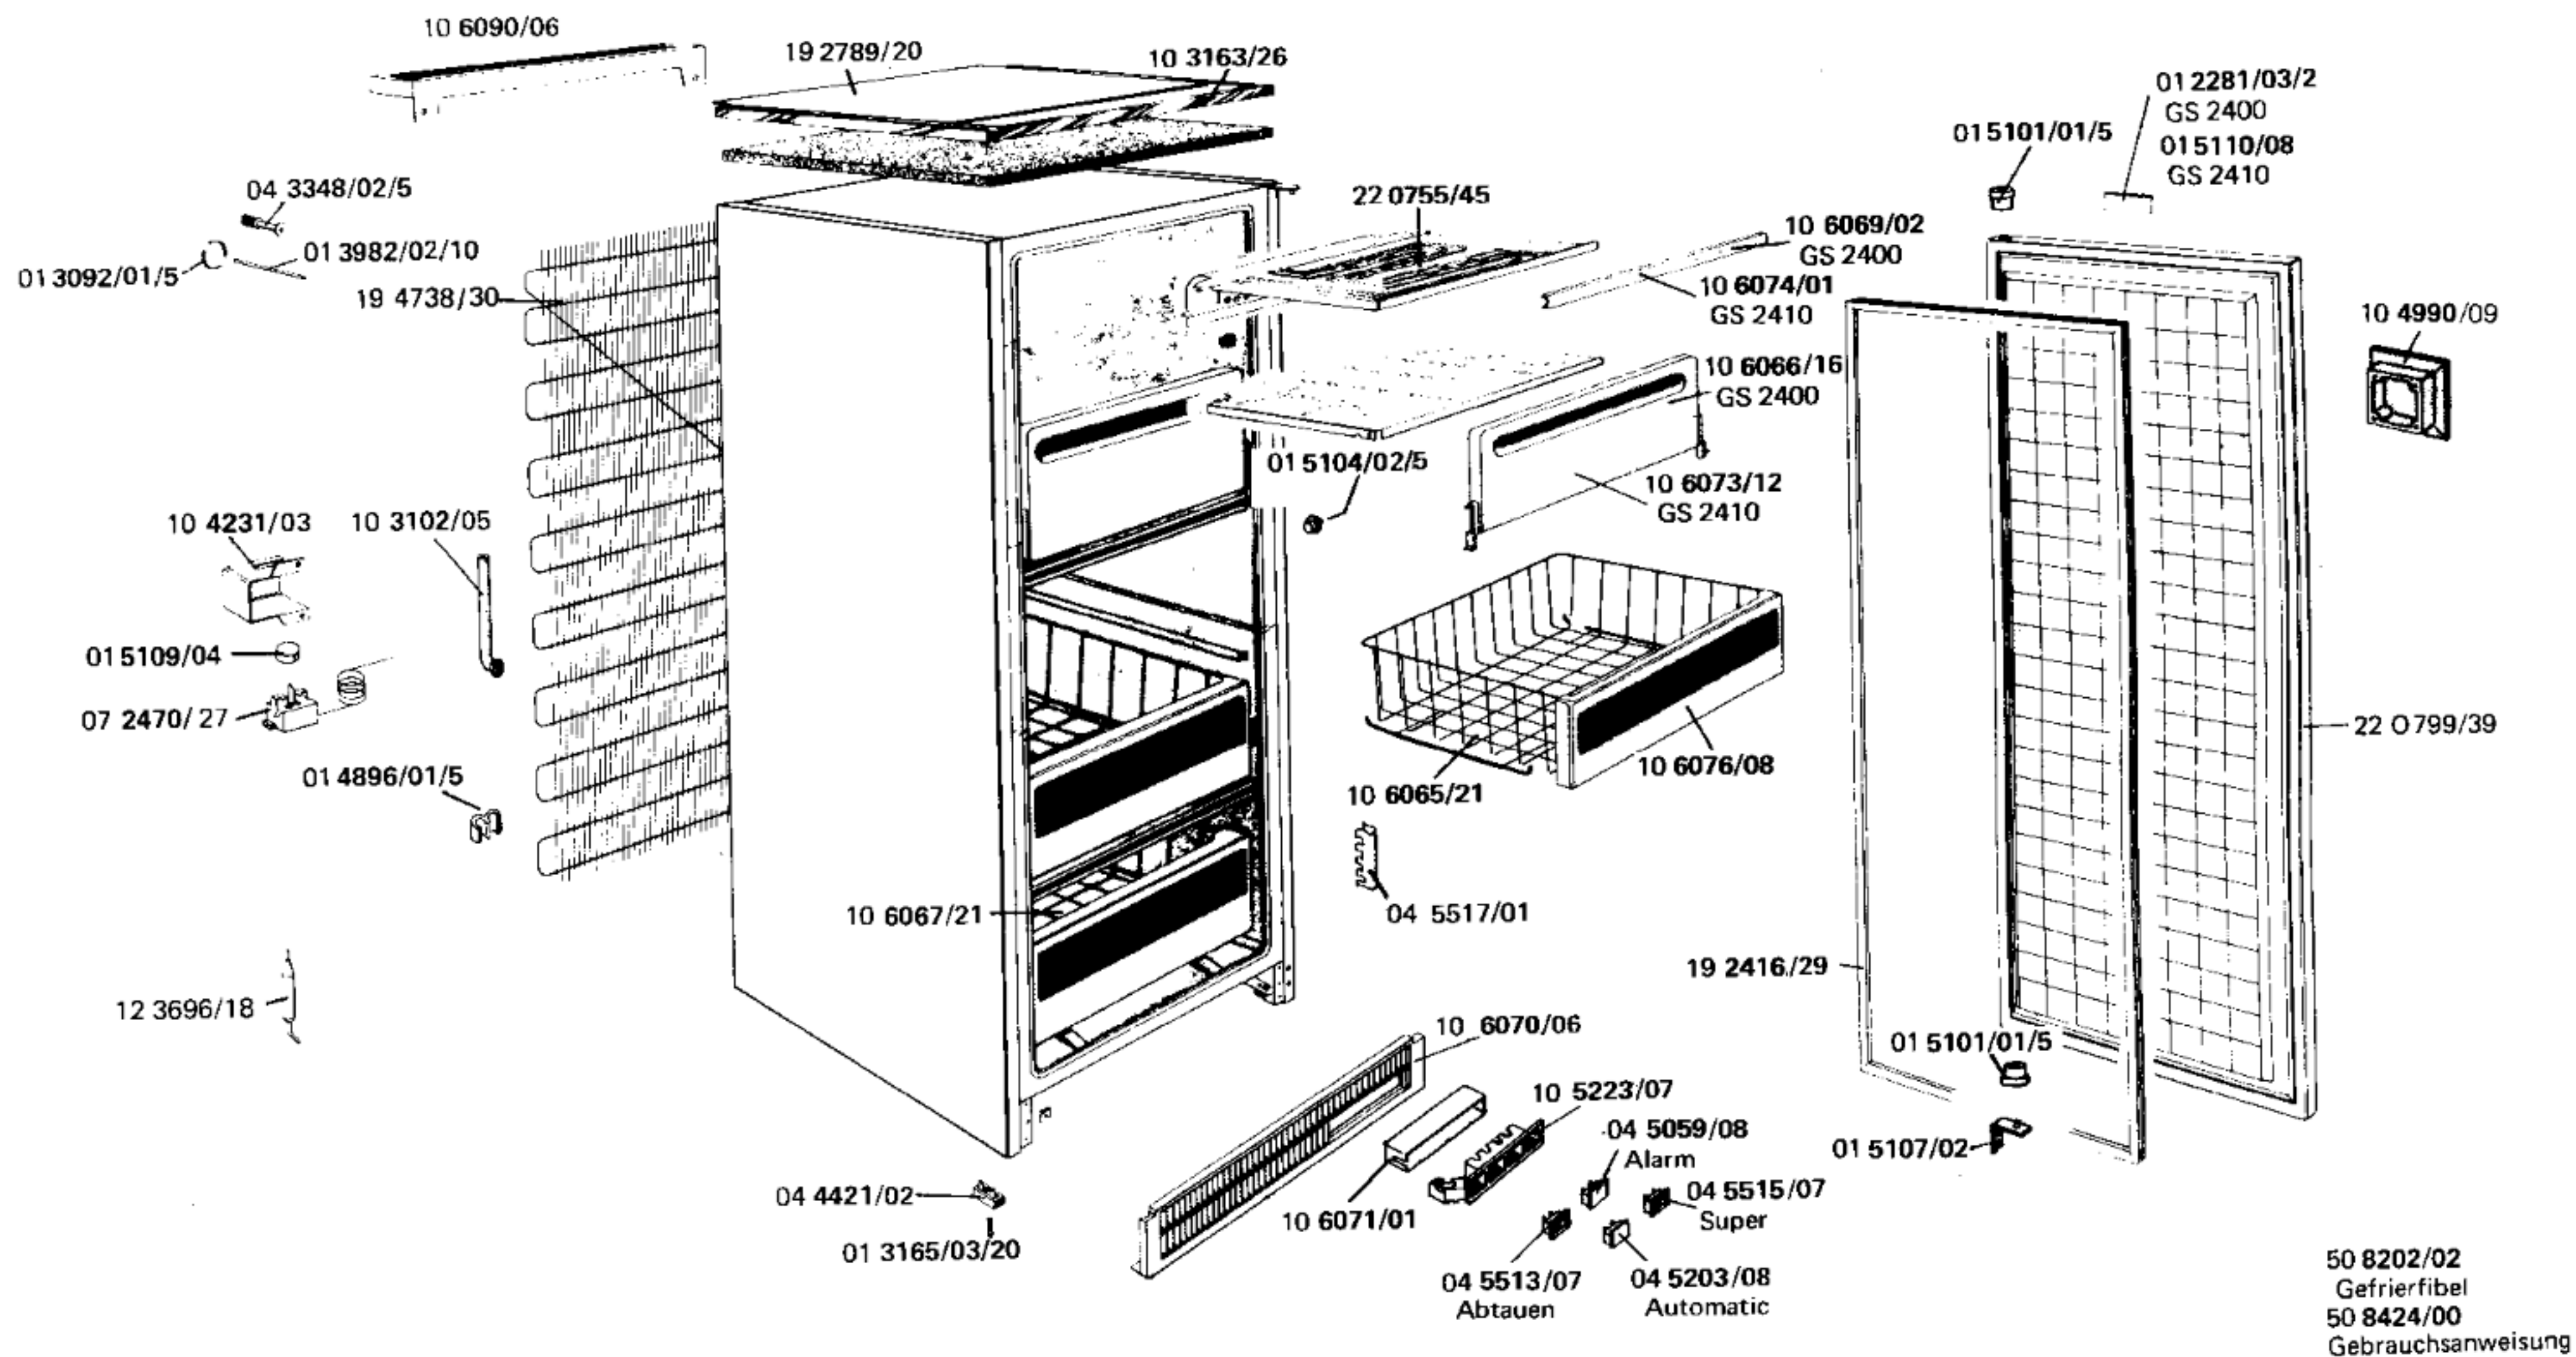

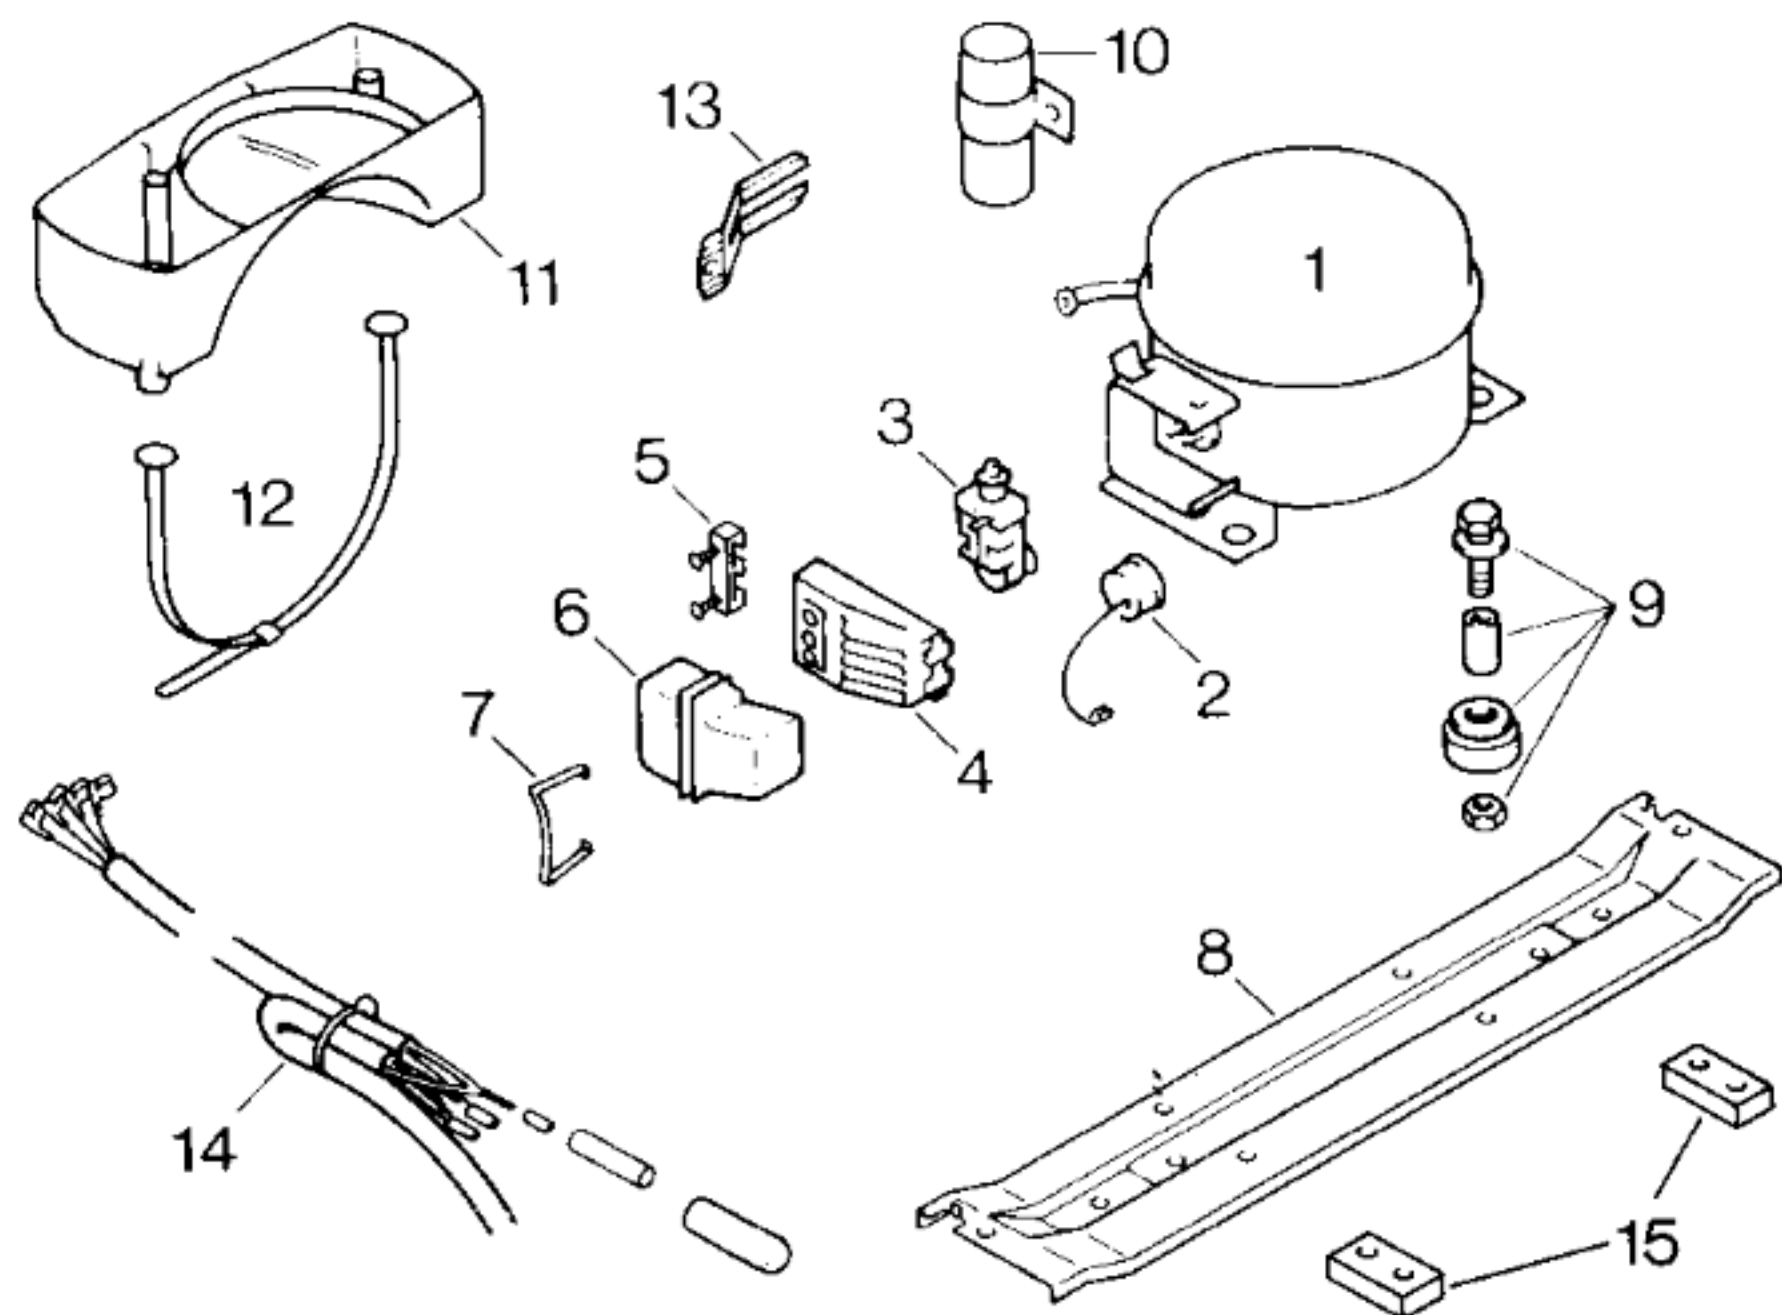

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch		Danfoss	
Typ/Type		V 1040		TL 5 A	
Förderleistung/Delivery/Débit	l/h			V 920	
Anlaufstrom/Starting current/Cour. de démarrage	A	9,5		9,0	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	15,0		15,7	
	Hi/aux Ω	29,0		18,8	
Temp.-Regler/Thermostat		Bosch			
Typ/Type		kalt		warm	
Reglerstellung/Position		- 25		- 19	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	- 33		- 23	
Valeurs de commutation	„aus“	- 19		- 14	
	(„abtauen“ od.) „alarm“				
Füllmenge/Fill.quantity/Charge	R12	g	280		
Anschlußwert/Conn.load/Puiss. connectée		W	140		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	bis FD 5601	ab FD 5602	
	Bosch	Bosch	Danfoss
1			14 0065/45
2	07 2131/18		
3	07 2130/18	07 3899/09	02 0108/27
4	04 9865/05		
5			
6	10 3602/02		05 1413/05
7			
8			*11 1567/03
9	01 4895/02		*05 0166/05
10			
11			
12			
13			*04 1568/01/2
14			*05 1226/08
15			*01 9174/01/2

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch