


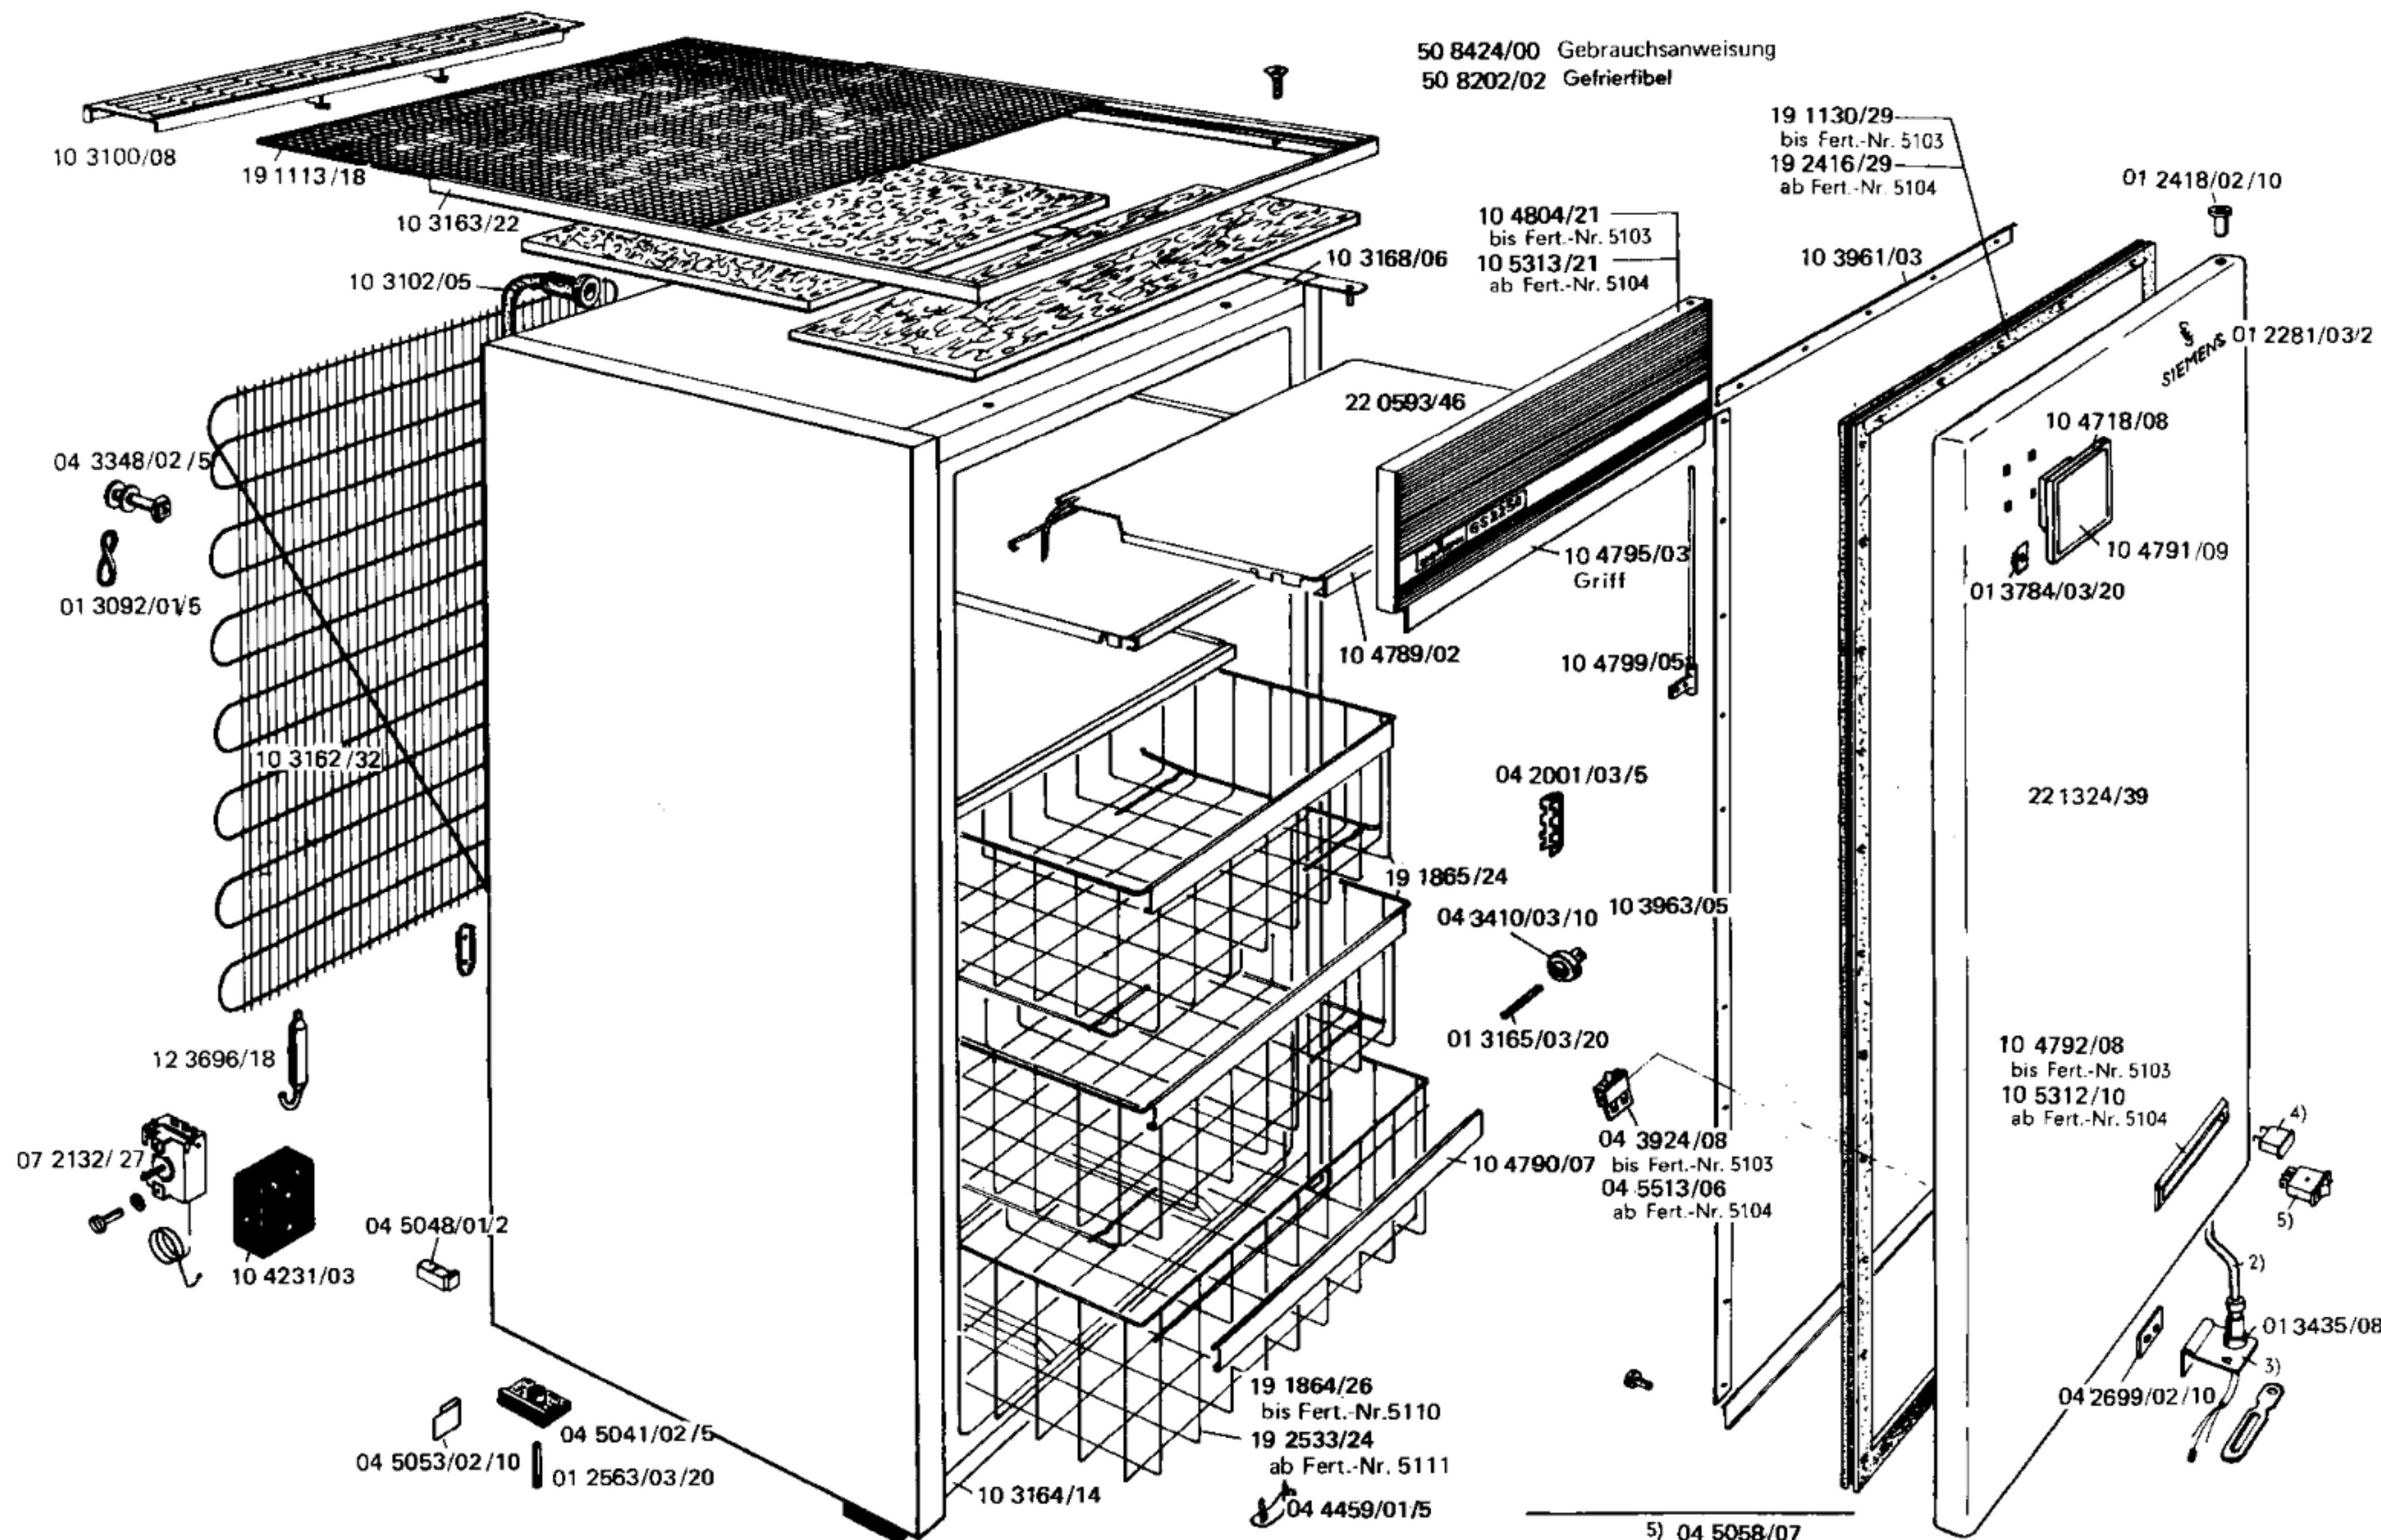

251056-2/1


1) —

2) 10 4807/25
GS 2250
10 4806/25
GS 2251

3) 04 4247/02
GS 2250
04 4249/02
GS 2251

4) 04 5059/08 Alarm
04 5060/08 Automatik
04 5061/08 Super

5) 04 5058/07 bis Fert.-Nr. 5103
04 5515/07 ab Fert.-Nr. 5104

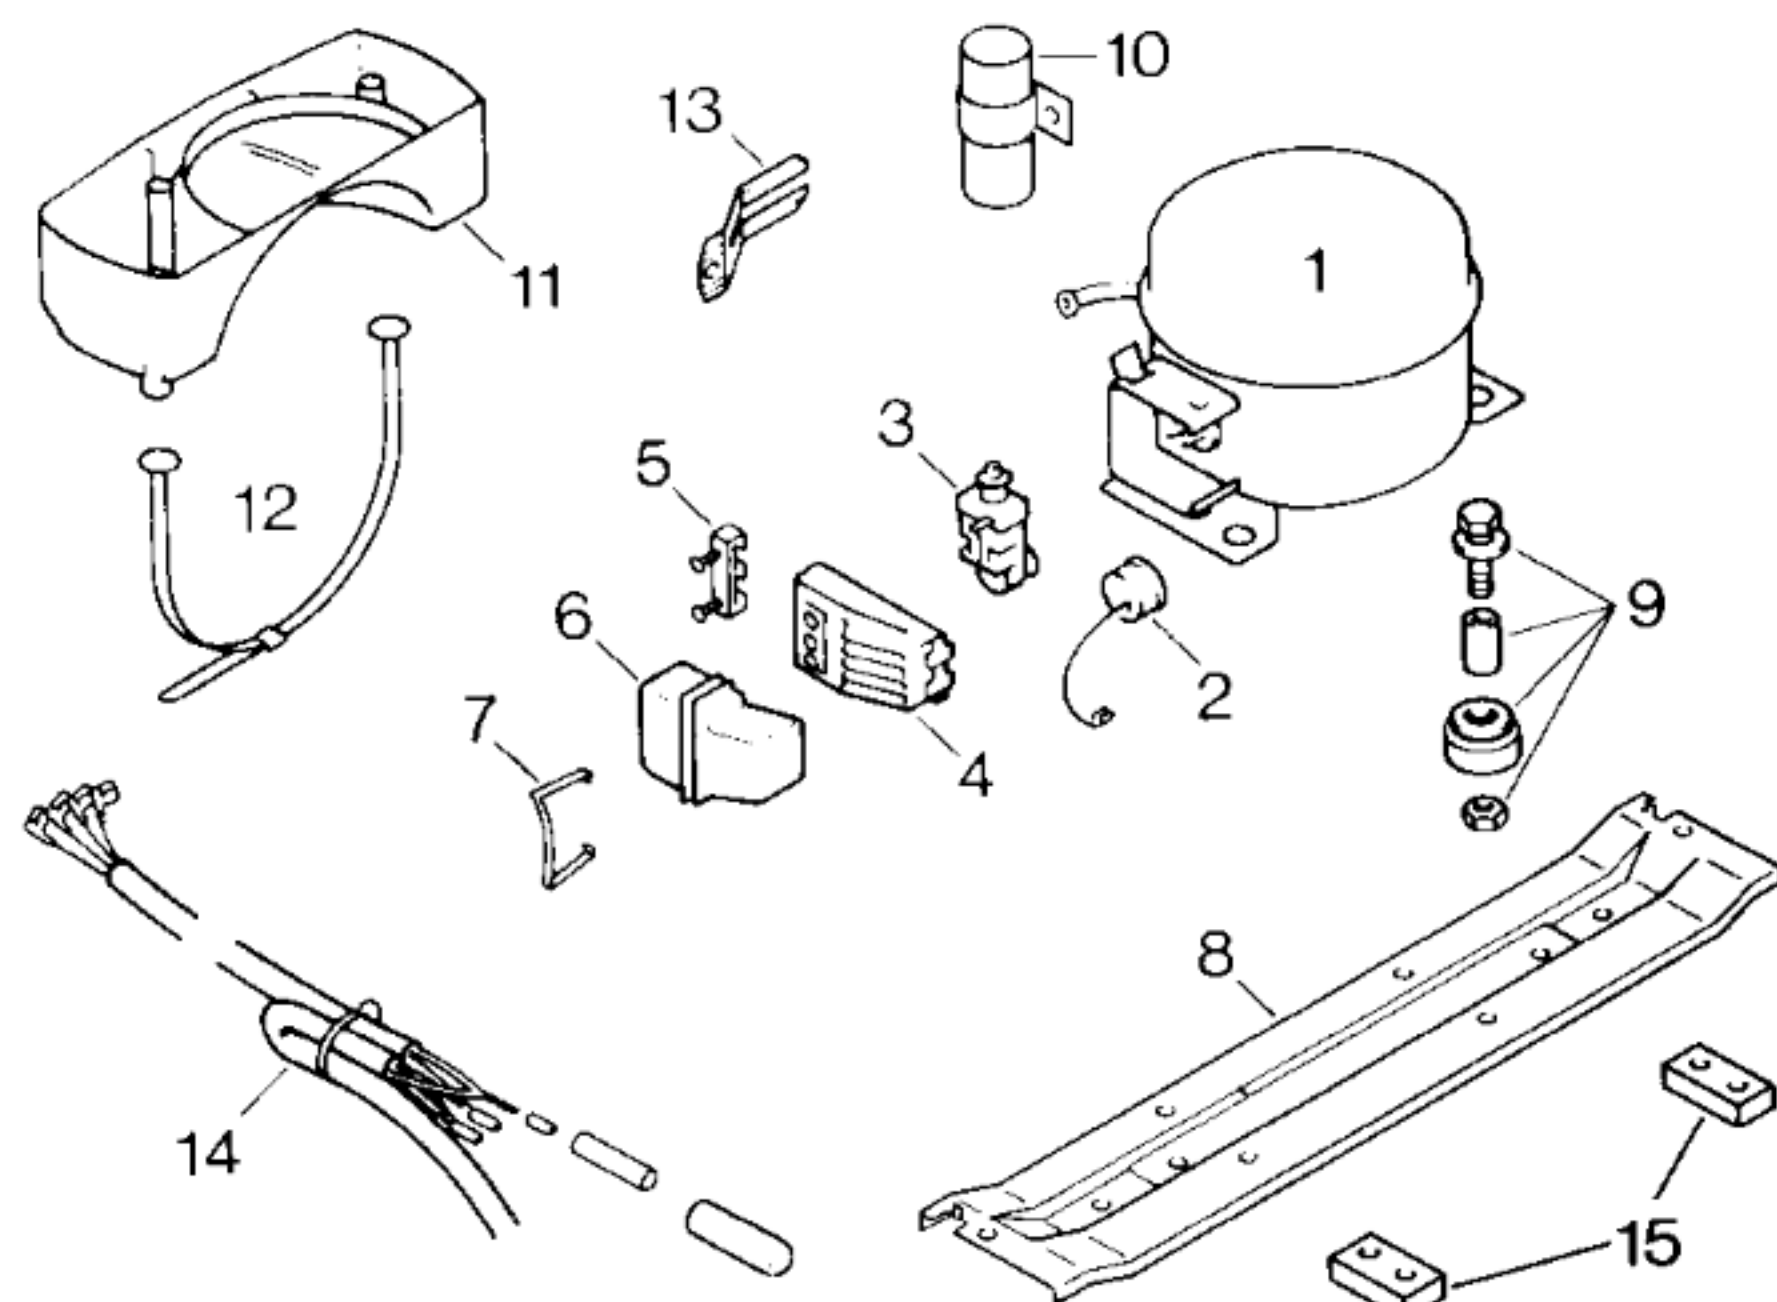

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur				
Typ/Type		Bosch	Danfoss	
Förderleistung/Delivery/Débit	l/h	V 1040	TL 5 A	
Anlaufstrom/Starting current/Cour. de démarrage	A	9,5	V 920	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	15,0	15,7	
	Hi/aux Ω	29,0	18,8	
Temp.-Regler/Thermostat				
Typ/Type		Bosch		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	- 25	- 19	
Valeurs de commutation	„aus“	- 33	- 23	
(„abtauen“ od.)	„alarm“	- 19	- 14	
Füllmenge/Fill quantity/Charge	R12	g	240	
Anschlußwert/Conn.load/Puiss. connectée		W	130	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	bis FD 5601	ab FD 5602	
	Bosch	Bosch	Danfoss
1			14 0065/45
2	07 2131/18		
3	07 2130/18	07 3899/09	02 0108/27
4	04 9865/05		
5			
6	10 3602/02		05 1413/05
7			
8			*11 1567/03
9	01 4895/02		*05 0166/05
10			
11			
12			
13			*04 1568/01/2
14			*05 1226/08
15			*01 9174/01/2

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch