



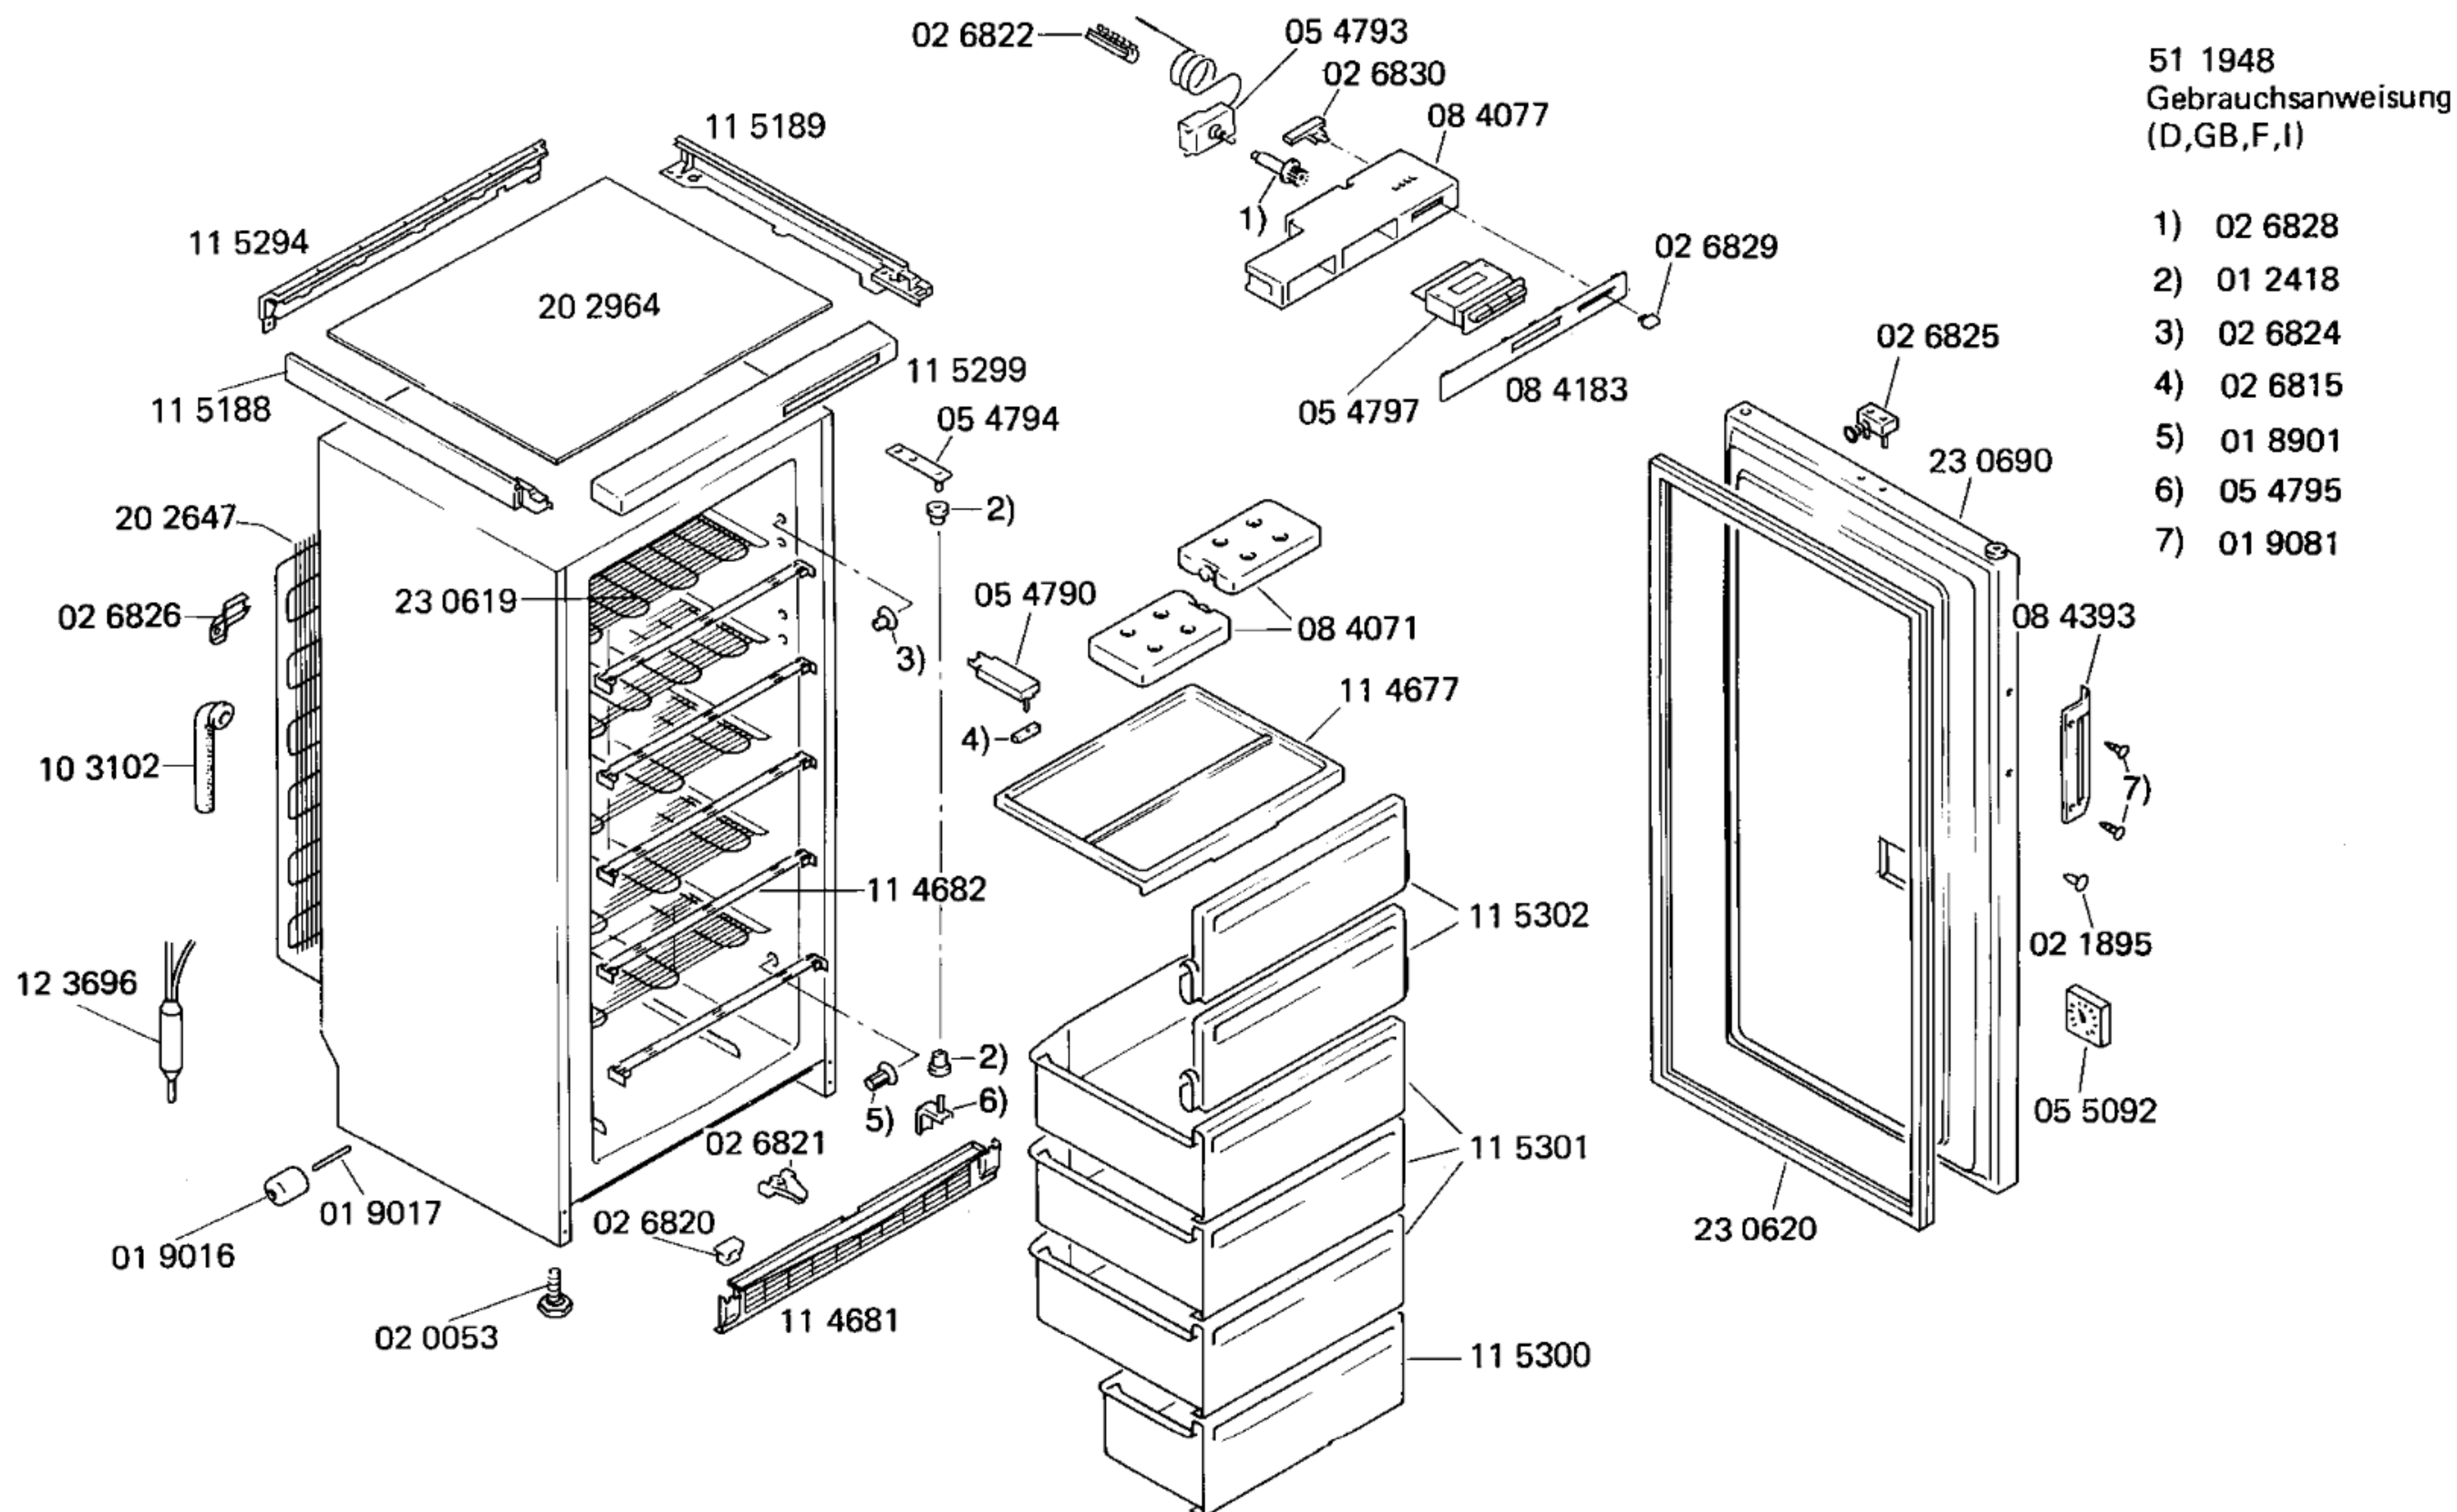

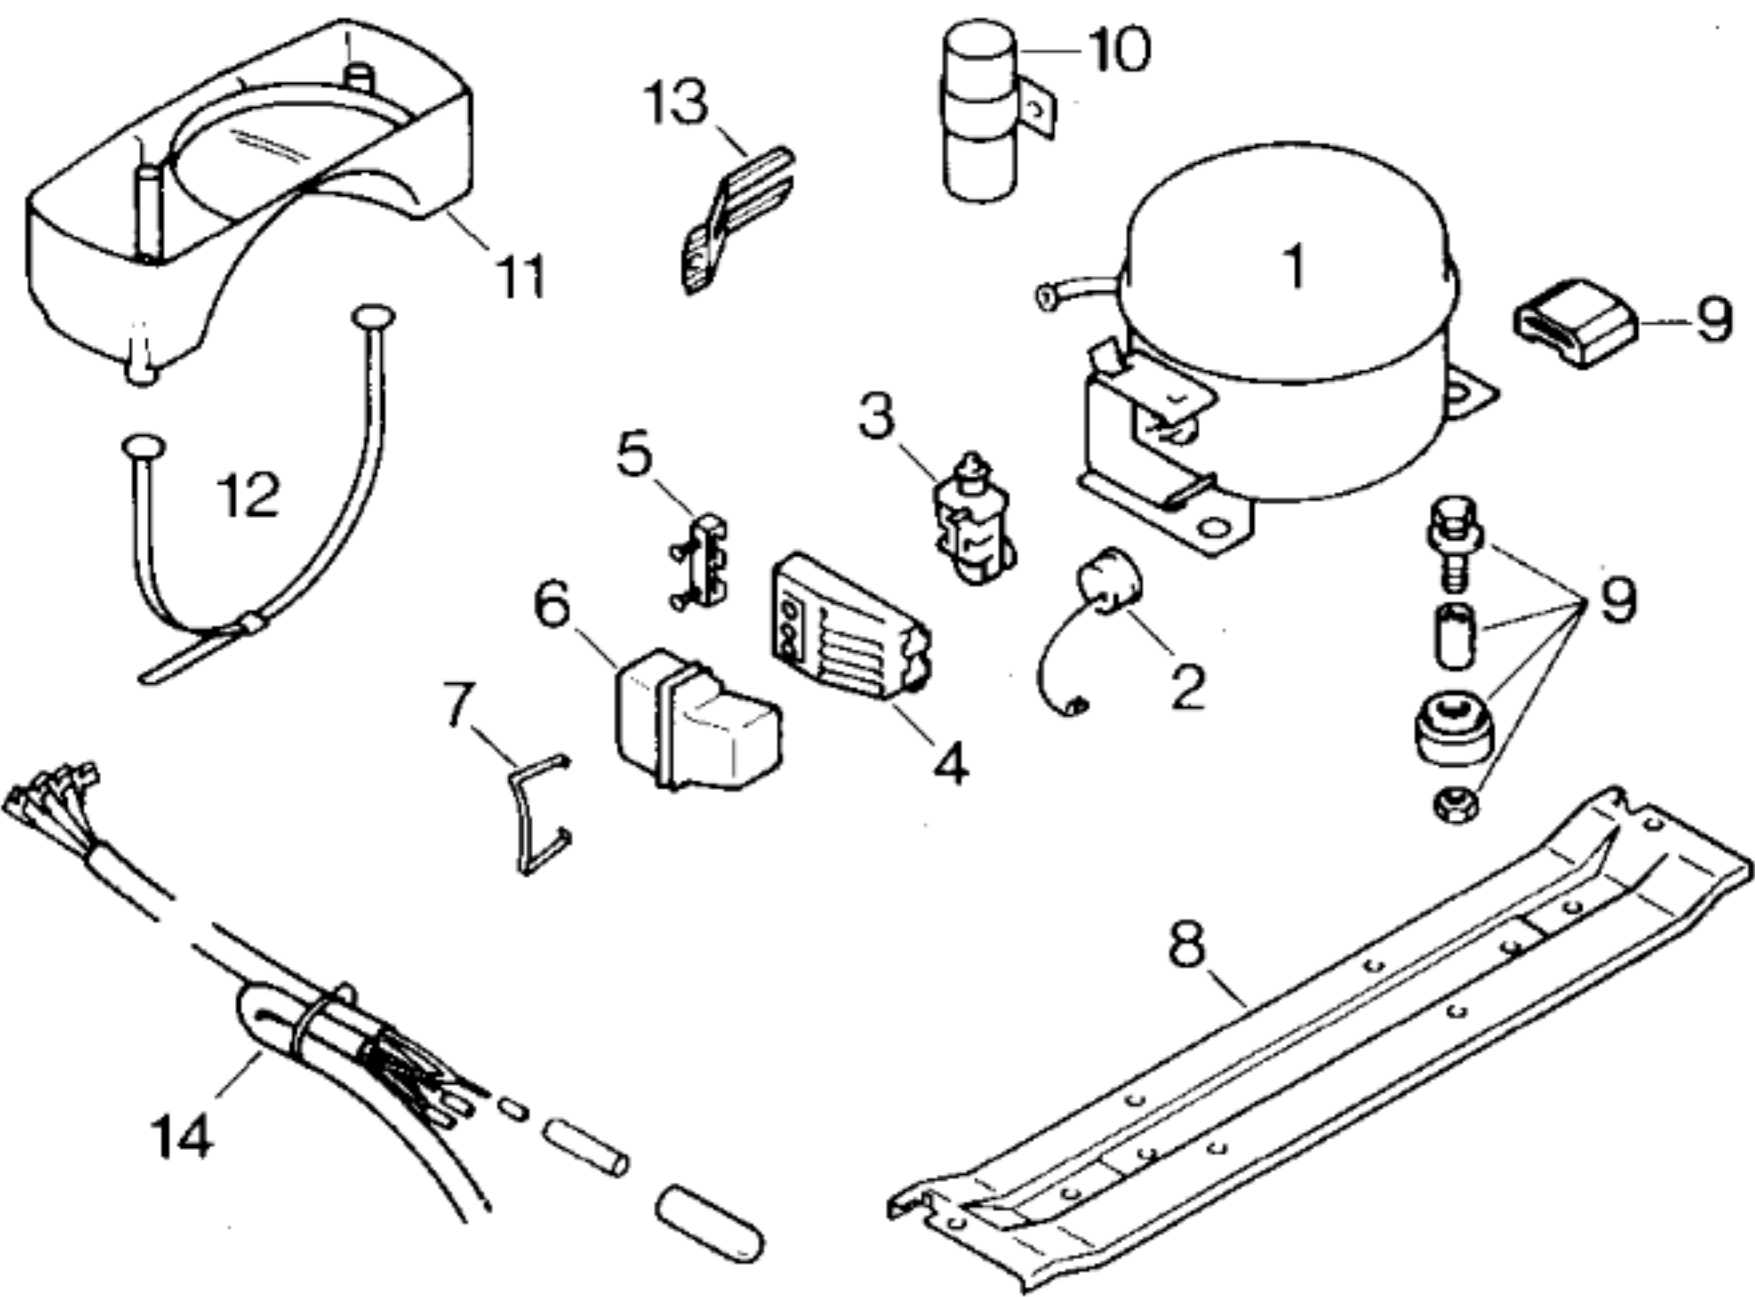

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera	Danfoss	
Typ/Type		BY 1116 A	FR 8,5 A	
Förderleistung/Delivery/Débit		l/h	1450	1430
Anlaufstrom/Starting current/Cour. de démarrage		A	9,9	10,3
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	11,7	12,2
		Hi/aux Ω	37,7	13,7
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077 B 2054		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	- 24 - 16	
Valeurs de commutation		„aus“	- 34 - 24	
		(„abtauen“ od.) „alarm“	- 19 - 12	
Füllmenge/Fill.quantity/Charge		R12 g	185	
Anschlußwert/Conn.load/Puiss. connectée		W	150	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

	EU1,CH1	EU1,CH1,F1		
Pos.	F1,EU3,CH3	EU2,CH2		
	Aspera	Danfoss		
1	14 0312	14 0157		
2	02 6559			
3	02 2342	02 0108		
4	05 1748			
5		02 1361		
6	05 1746	05 1413		
7	02 2339			
8				
9	05 0166			
10				
11				
12				
13				
14				