




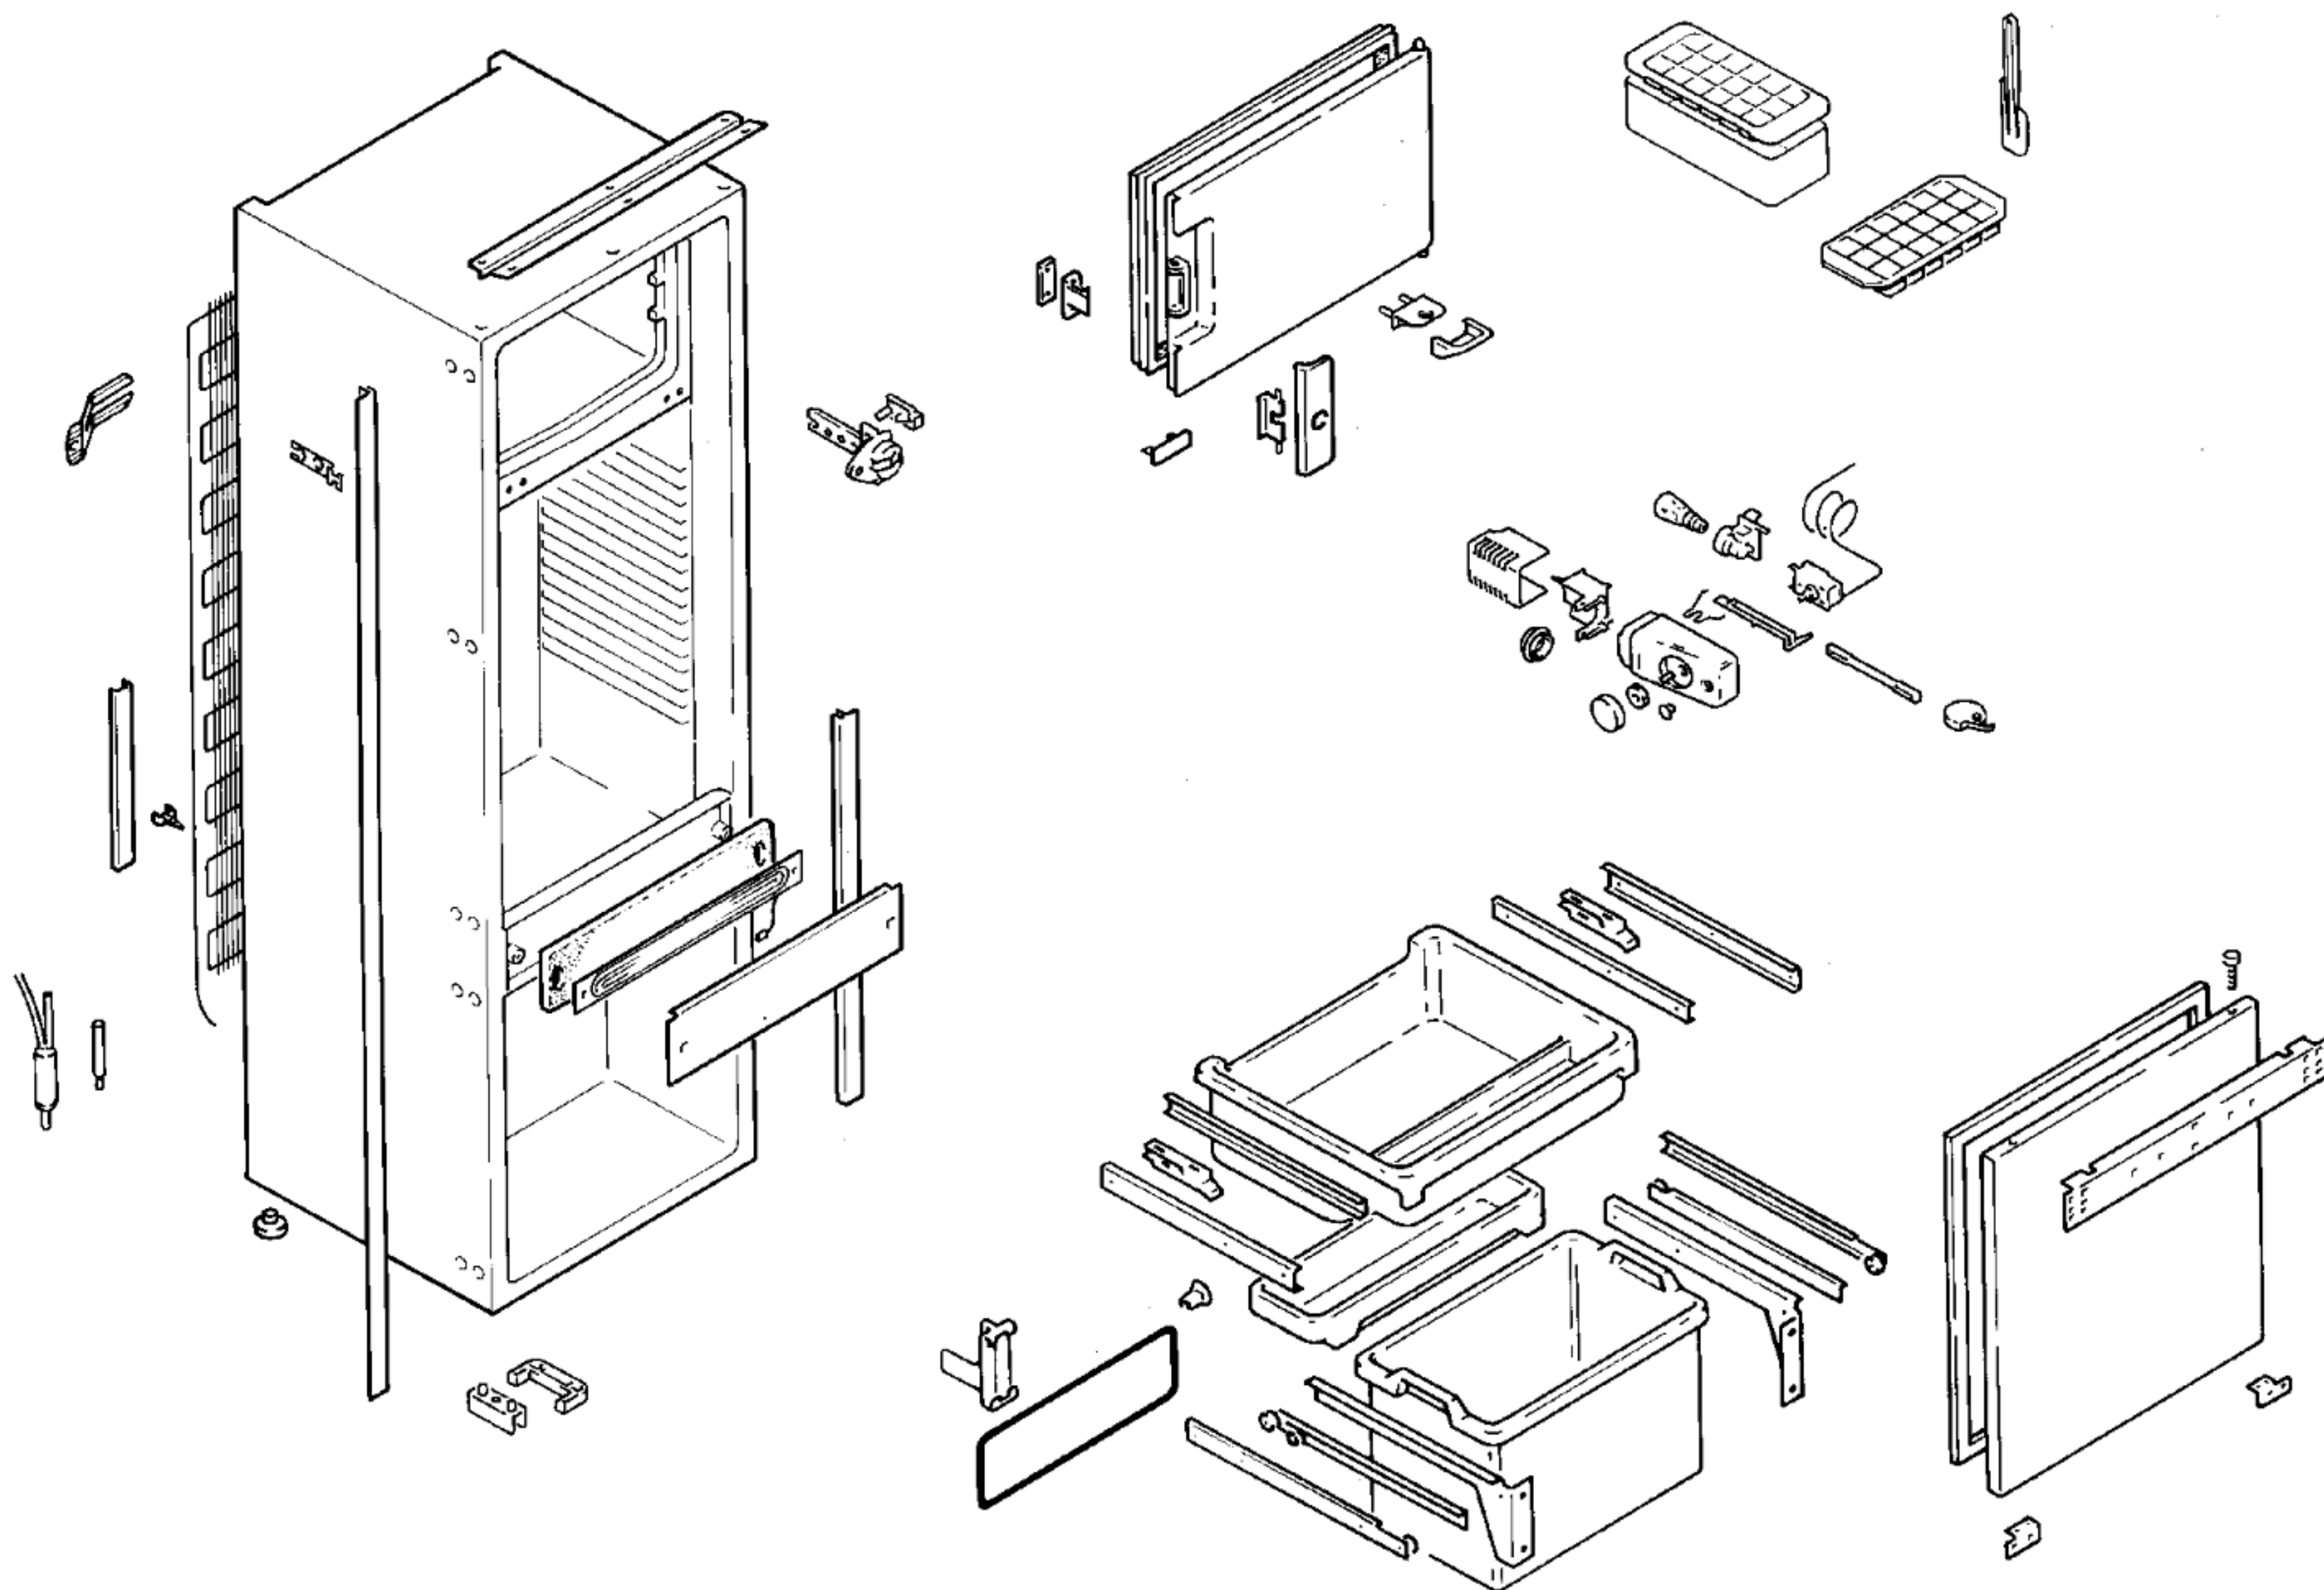

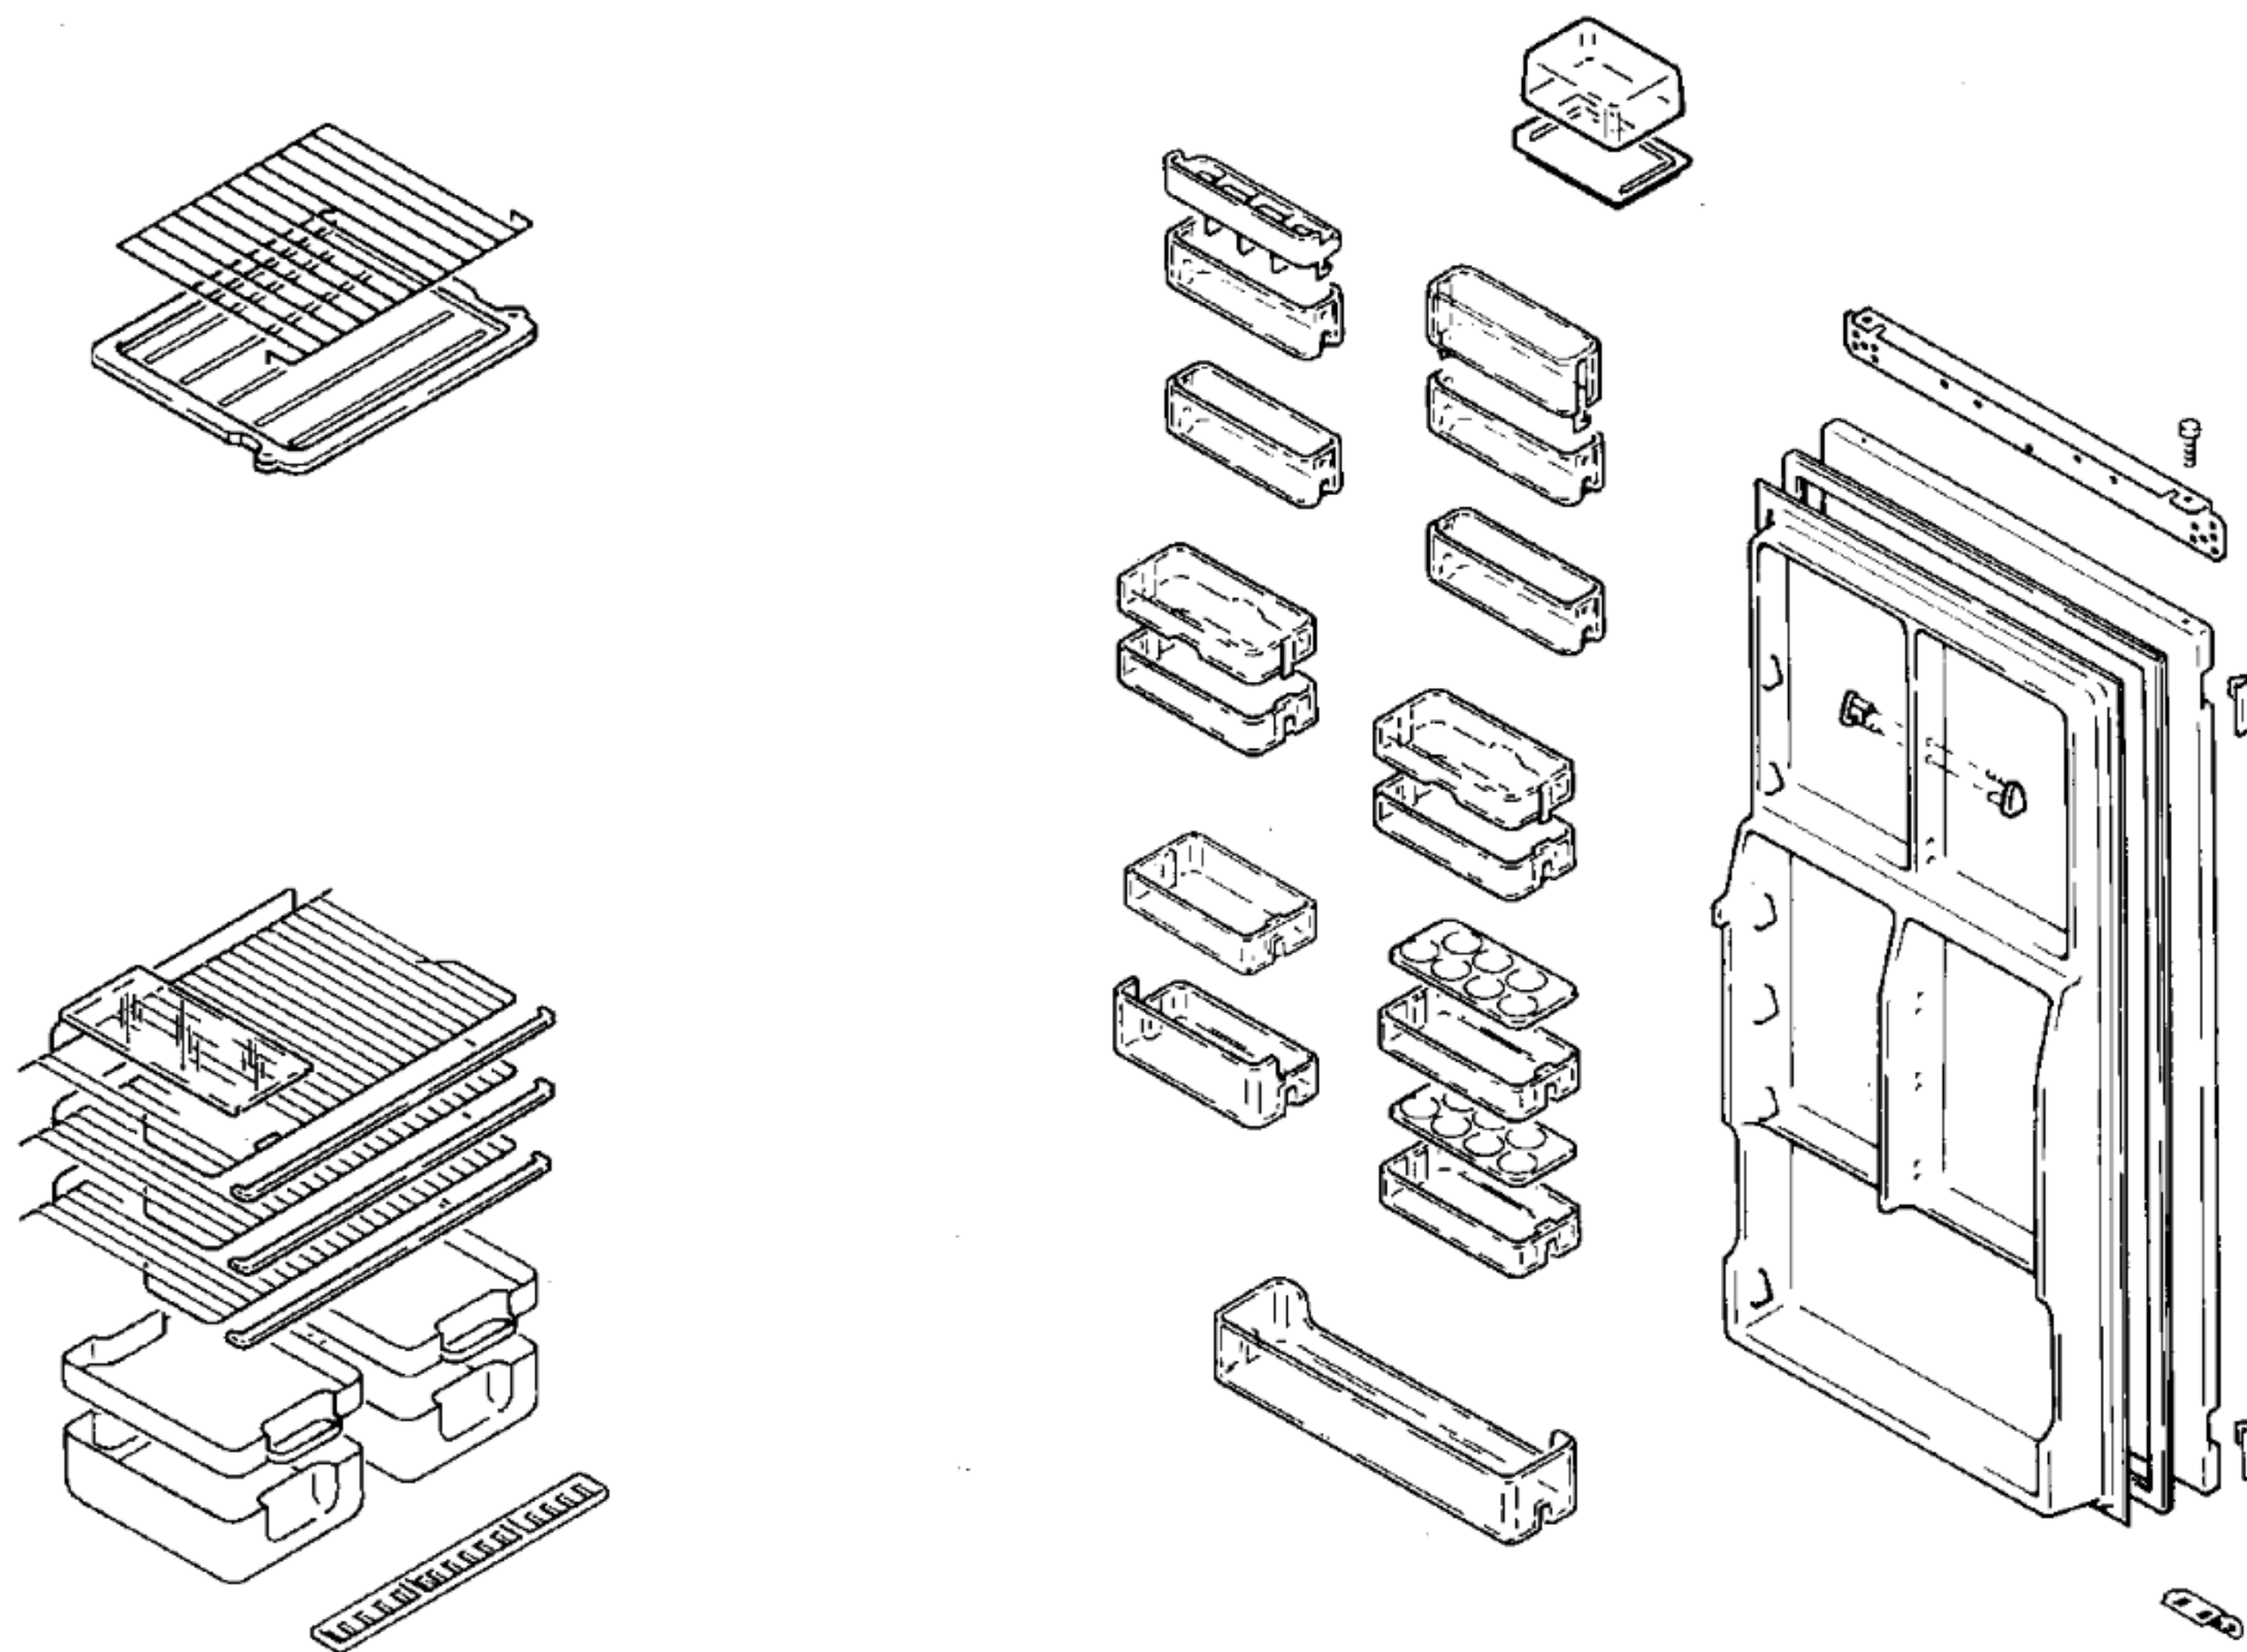

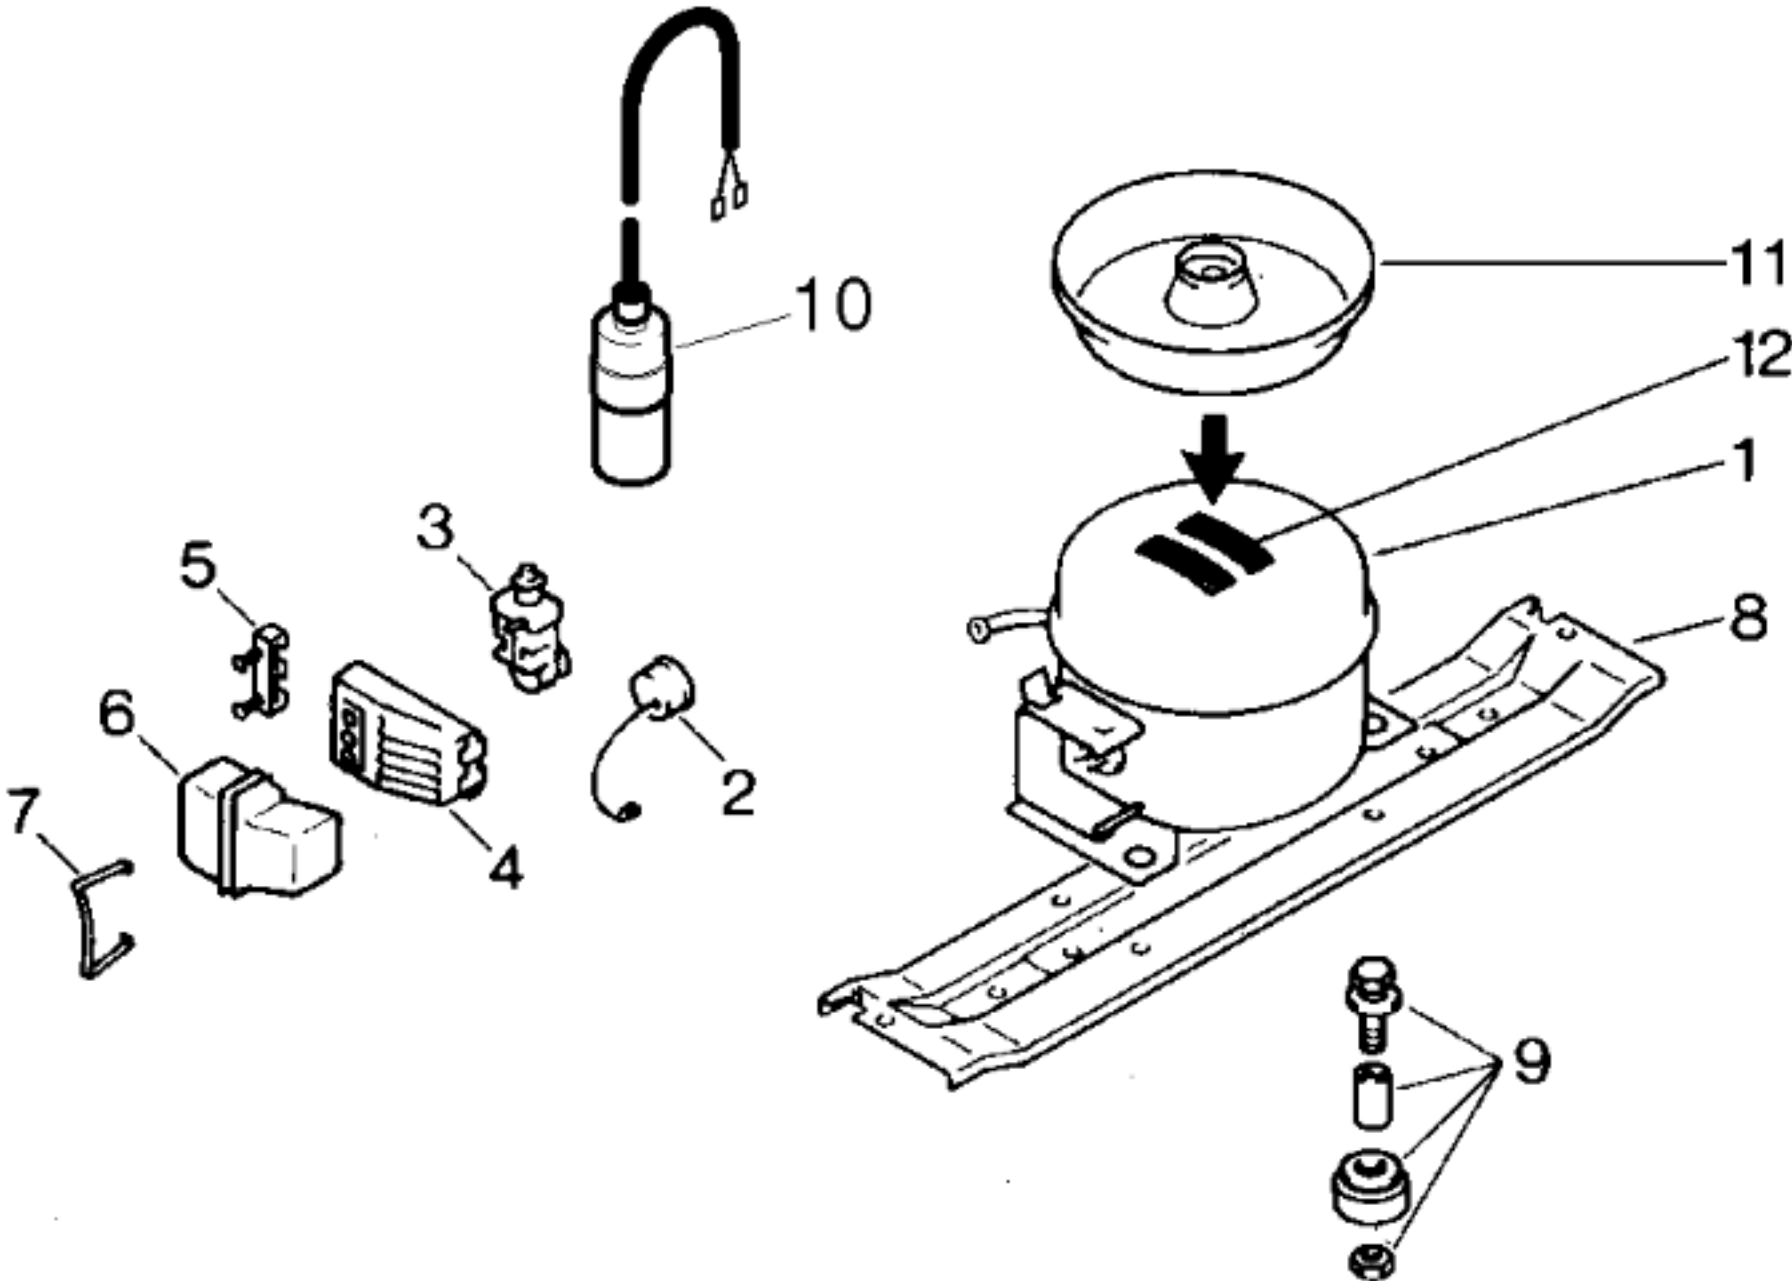

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Aspera	Matsushita	
Typ/Type	BY 1116A	D116LRAA	
Förderleistung/Delivery/Débit	l/h	1450	1184
Anlaufstrom/Starting current/Cour de démarrage	A	9,9	8,75
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	11,7	12,0
	Hi/aux Ω	37,7	28,7
Temp.-Regler/Thermostat	Ranco		
Typ/Type	K59		
Reglerstellung/Position	kalt	warm	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+4,5	+4,5
Valeurs de commutation	„aus“	-31,0	-13,5
	(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge	R12	g	180
Anschlußwert/Conn.load/Puiss. connectée	W	150	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω	8800	
Leistung/Power/Puissance	W	5,5	
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

Pos.			
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			