



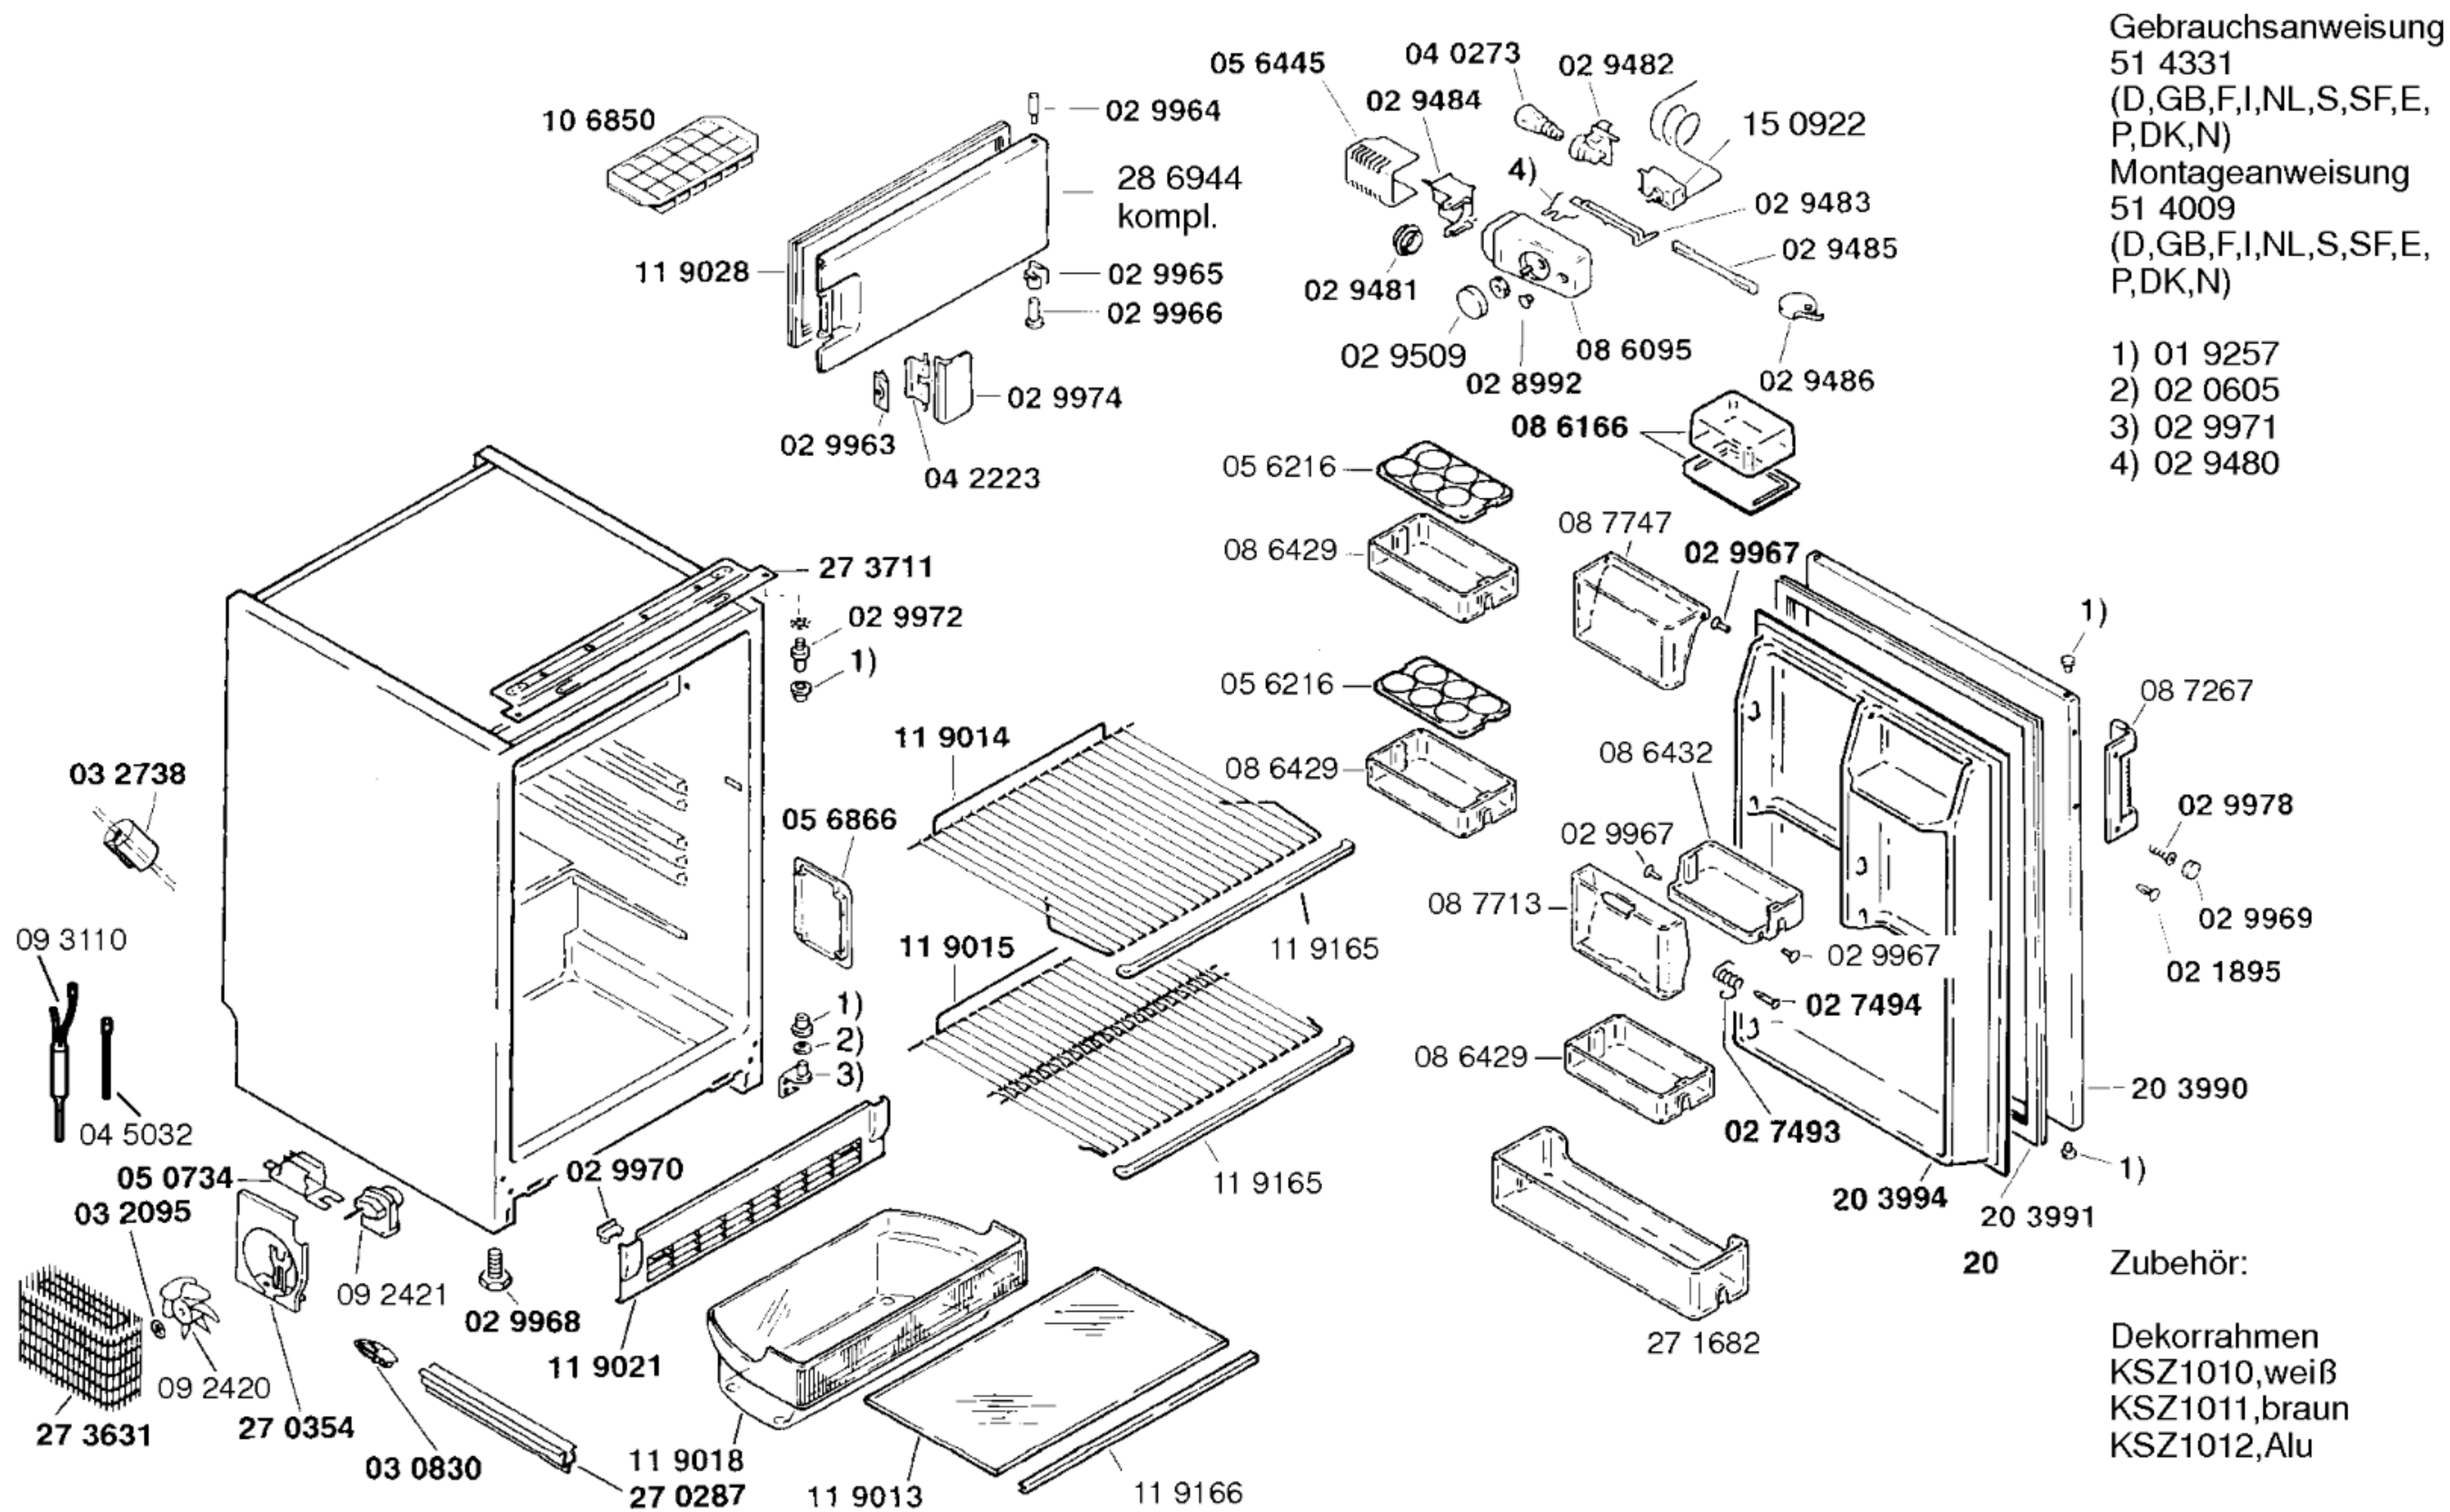

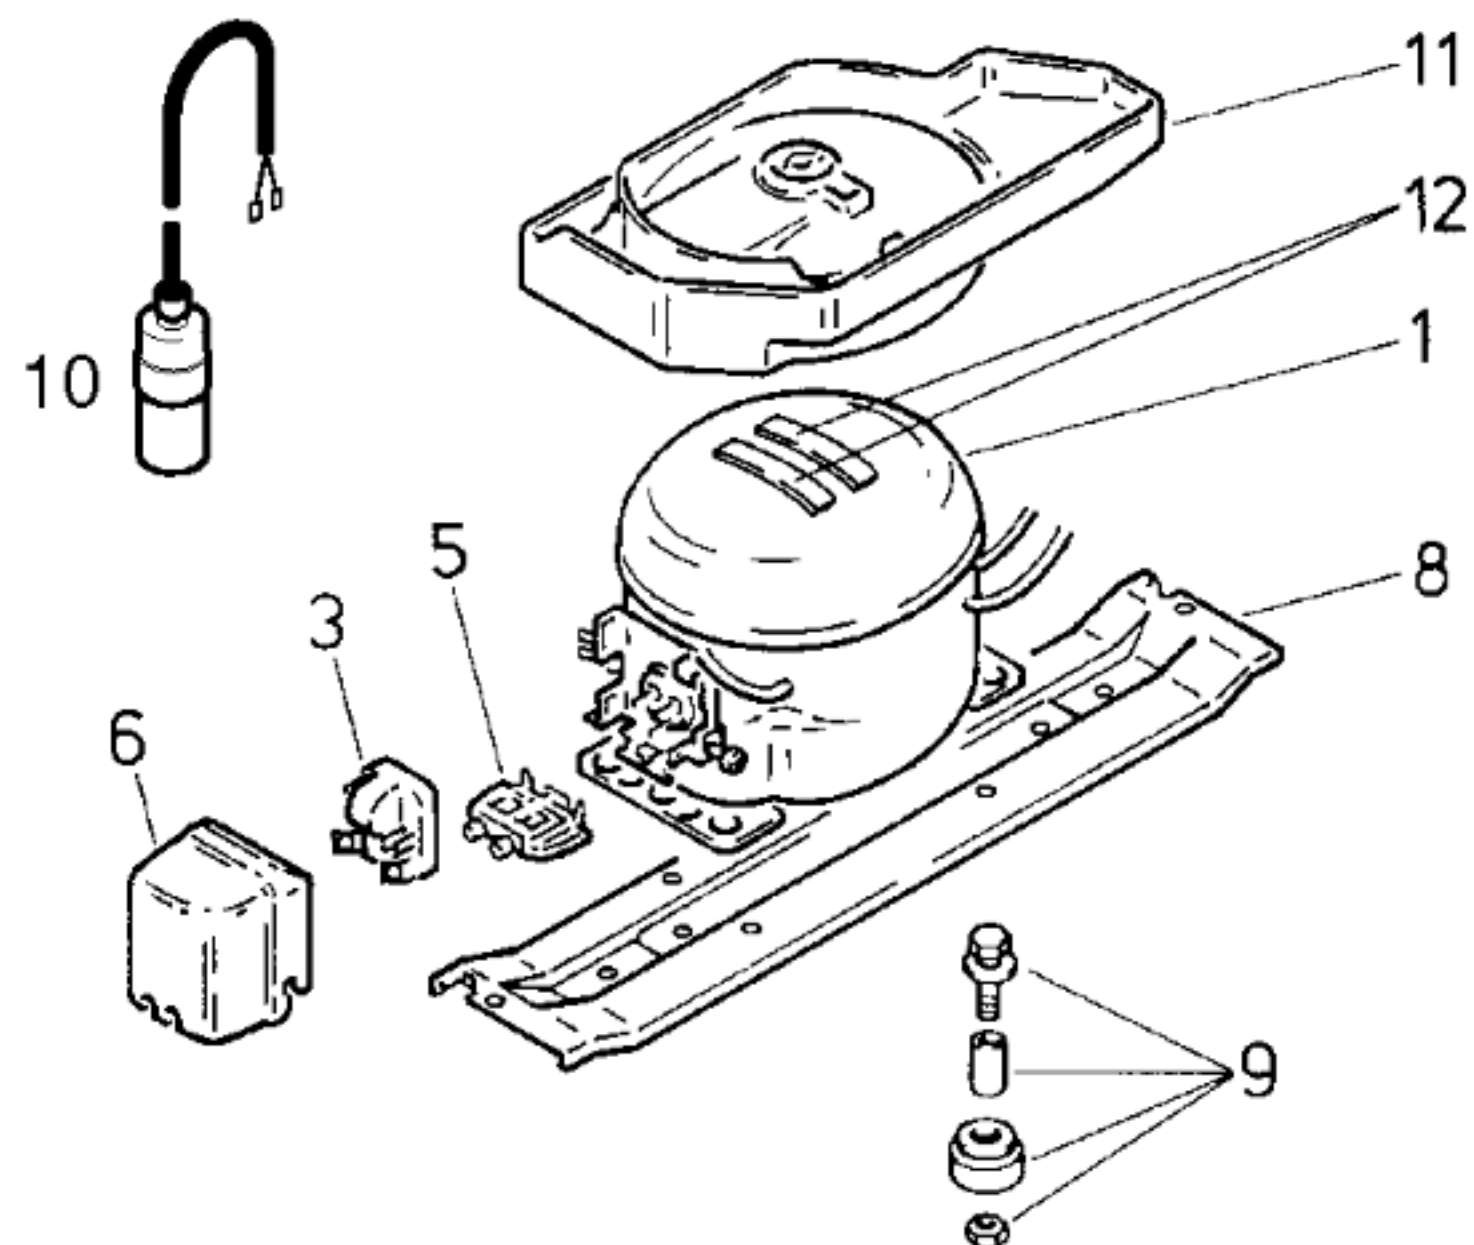

Pos.	V01		
	Matsushita	Danfoss	
	S075LKAA	TL 4 A	
1	14 0599	13 1064	
2			
3	03 2034	15 1055	
4			
5		15 1053	
6	05 8457	15 1072	
7			
8	27 0833	27 0833	
9	05 0166	05 0166	
10			
11	08 8893	08 4744	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		S075LKAA	TL 4 A	
Förderleistung/Delivery/Débit		l/h	641	695
Anlaufstrom/Starting current/Cour de démarrage		A	5,7	8,3
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	24,4	23,4
		Hi/aux Ω	39,8	15,5
Temp.-Regler/Thermostat		Danfoss		
Typ/Type				
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		„ein“	+4,5	+4,5
Valeurs de commutation		„aus“	-31,0	-13,5
(„abtauen“ od.)		„alarm“		
Füllmenge/Fill.quantity/Charge		R12	g	V01-95
				V02-90
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		