



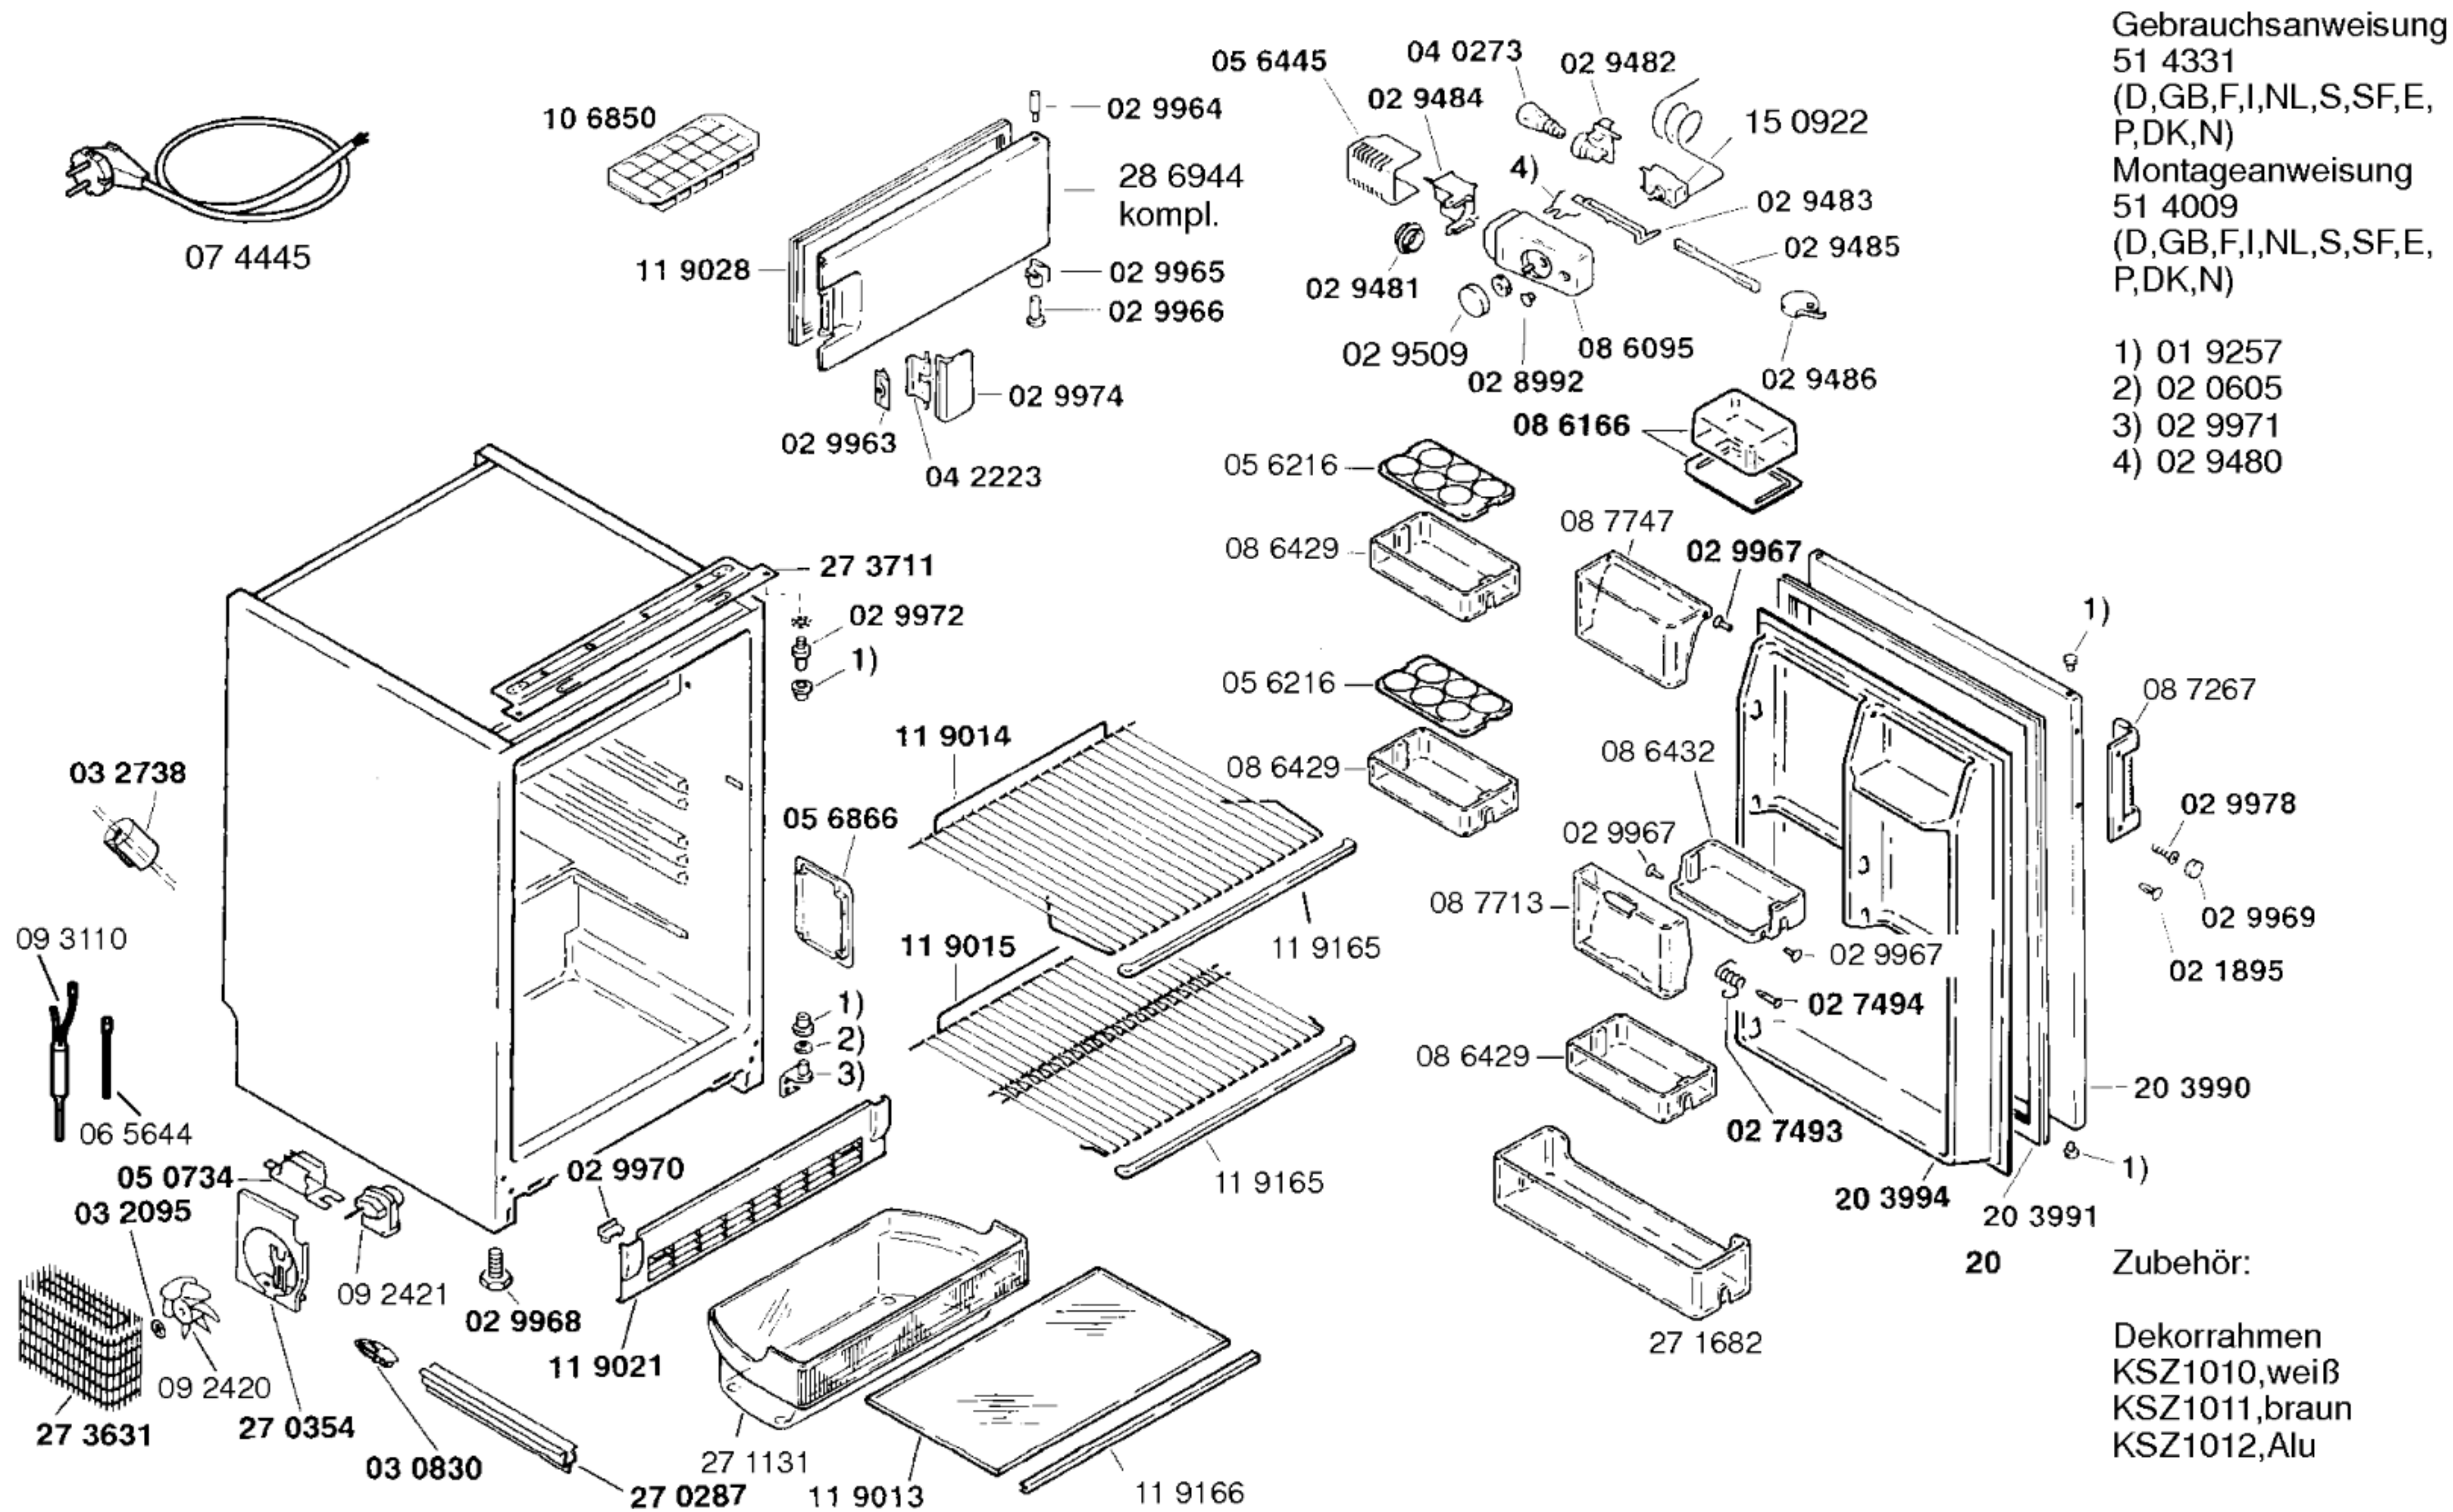

Gebrauchsanweisung
51 4331
(D,GB,F,I,NL,S,SF,E,
P,DK,N)
Montageanweisung
51 4009
(D,GB,F,I,NL,S,SF,E,
P,DK,N)

- 1) 01 9257
2) 02 0605
3) 02 9971
4) 02 9480

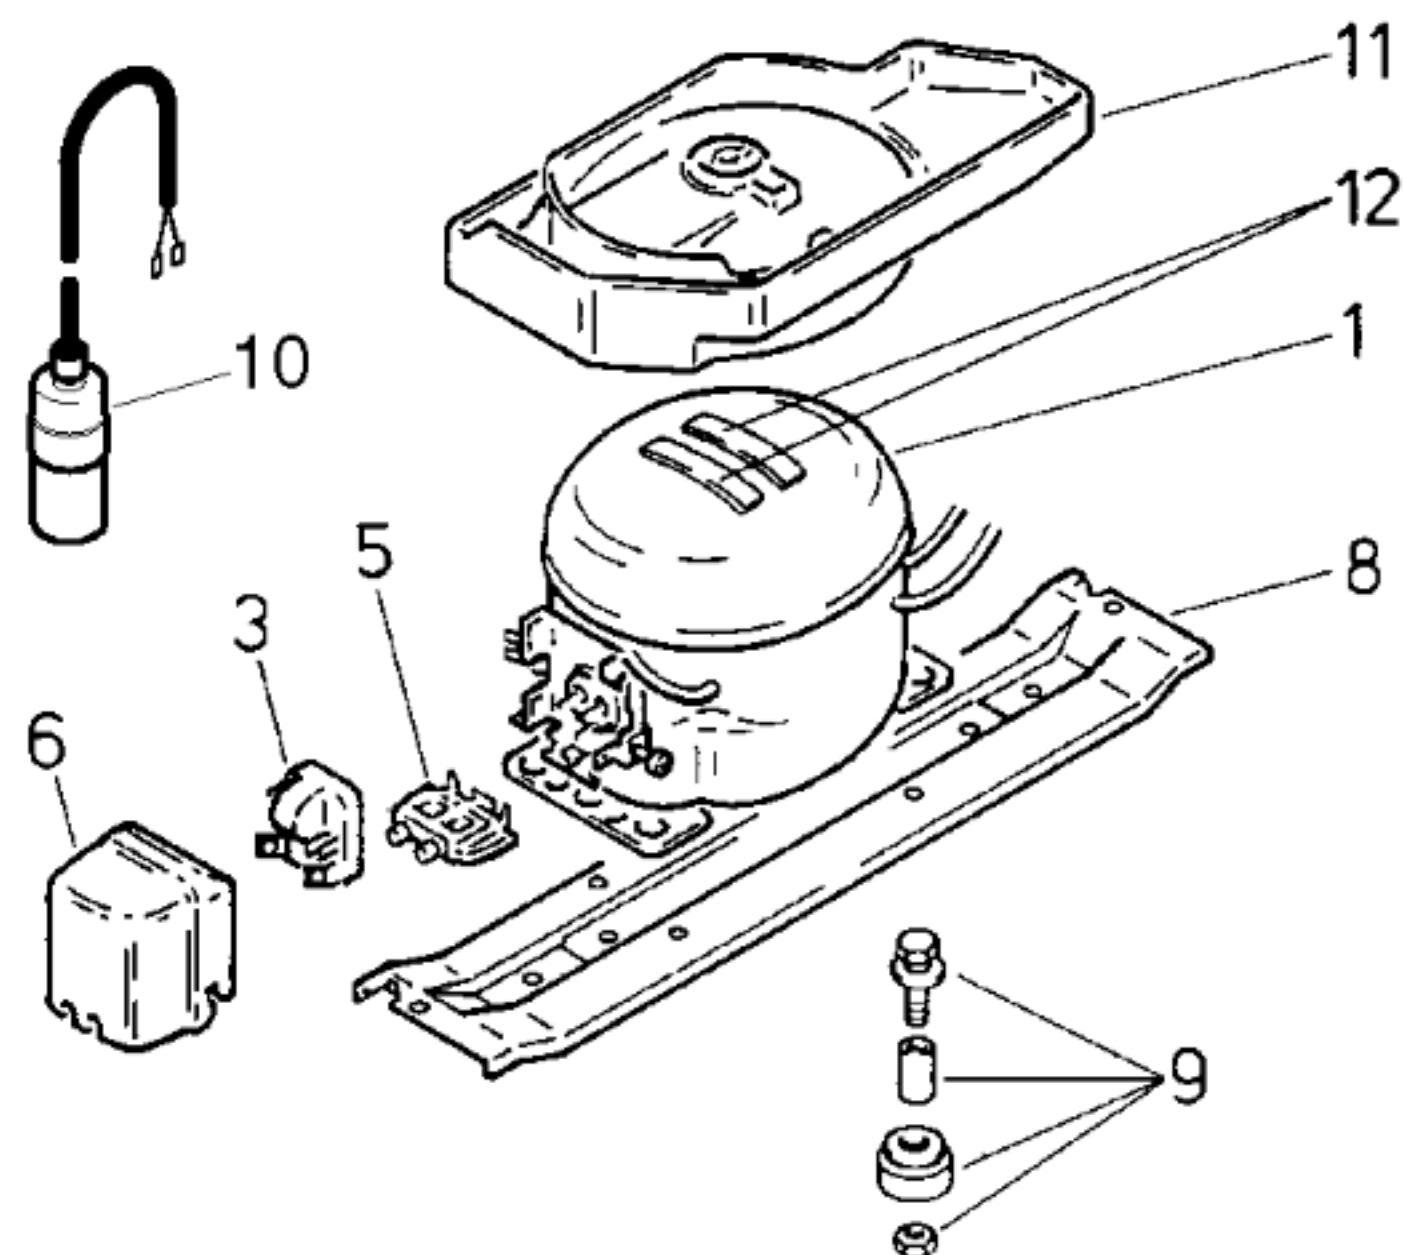

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Matsushita
Typ/Type		TLES 7 K		SD 65 E
Förderleistung/Delivery/Débit	l/h	1168		1170
Anlaufstrom/Starting current/Cour de démarrage	A	4,5		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	16,5		
	Hi/aux Ω	16,9		
Temp.-Regler/Thermostat		Danfoss		
Typ/Type				
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+4,5	+4,5	
Valeurs de commutation	„aus“	-31	-13,5	
	{„abtauen“ od. „alarm“}			
Füllmenge/Fill.quantity/Charge	R600a	g	24	27
Anschlußwert/Conn.load/Puiss. connectée	W	110		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

	V01	V02	
Pos.	Danfoss	Danfoss	
	TLES 7 K	SD 65 E	
1	14 1239	14 1316	
2			
3	15 1055	03 2035	
4			
5	15 0760		
6	15 1072	05 8458	
7			
8	27 1375	27 0833	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	