

**BOSCH**

GSS2605/01-V01
GSS2605CH/01-V02
GSS2605FF/01-V03


GSS2605/42-V04
GSS2605CH/42-V05
GSS2605FF/42-V06

KÜHL-,GEFRIERGERÄTE
Gefrierschränke, Stand

Mat. - Nr. - Konstante
3740

Gebrauchsanweisung
51 9940
(D,GB,F,I,NL,E,P)

- 1) 15 4364
- 2) 26 3360
- 3) 06 8300
- 4) 02 6824
- 5) 06 8297
- 6) 06 8299
- 7) 06 8298
- 8) 16 6926
- 9) 06 8293
- 10) 16 7339

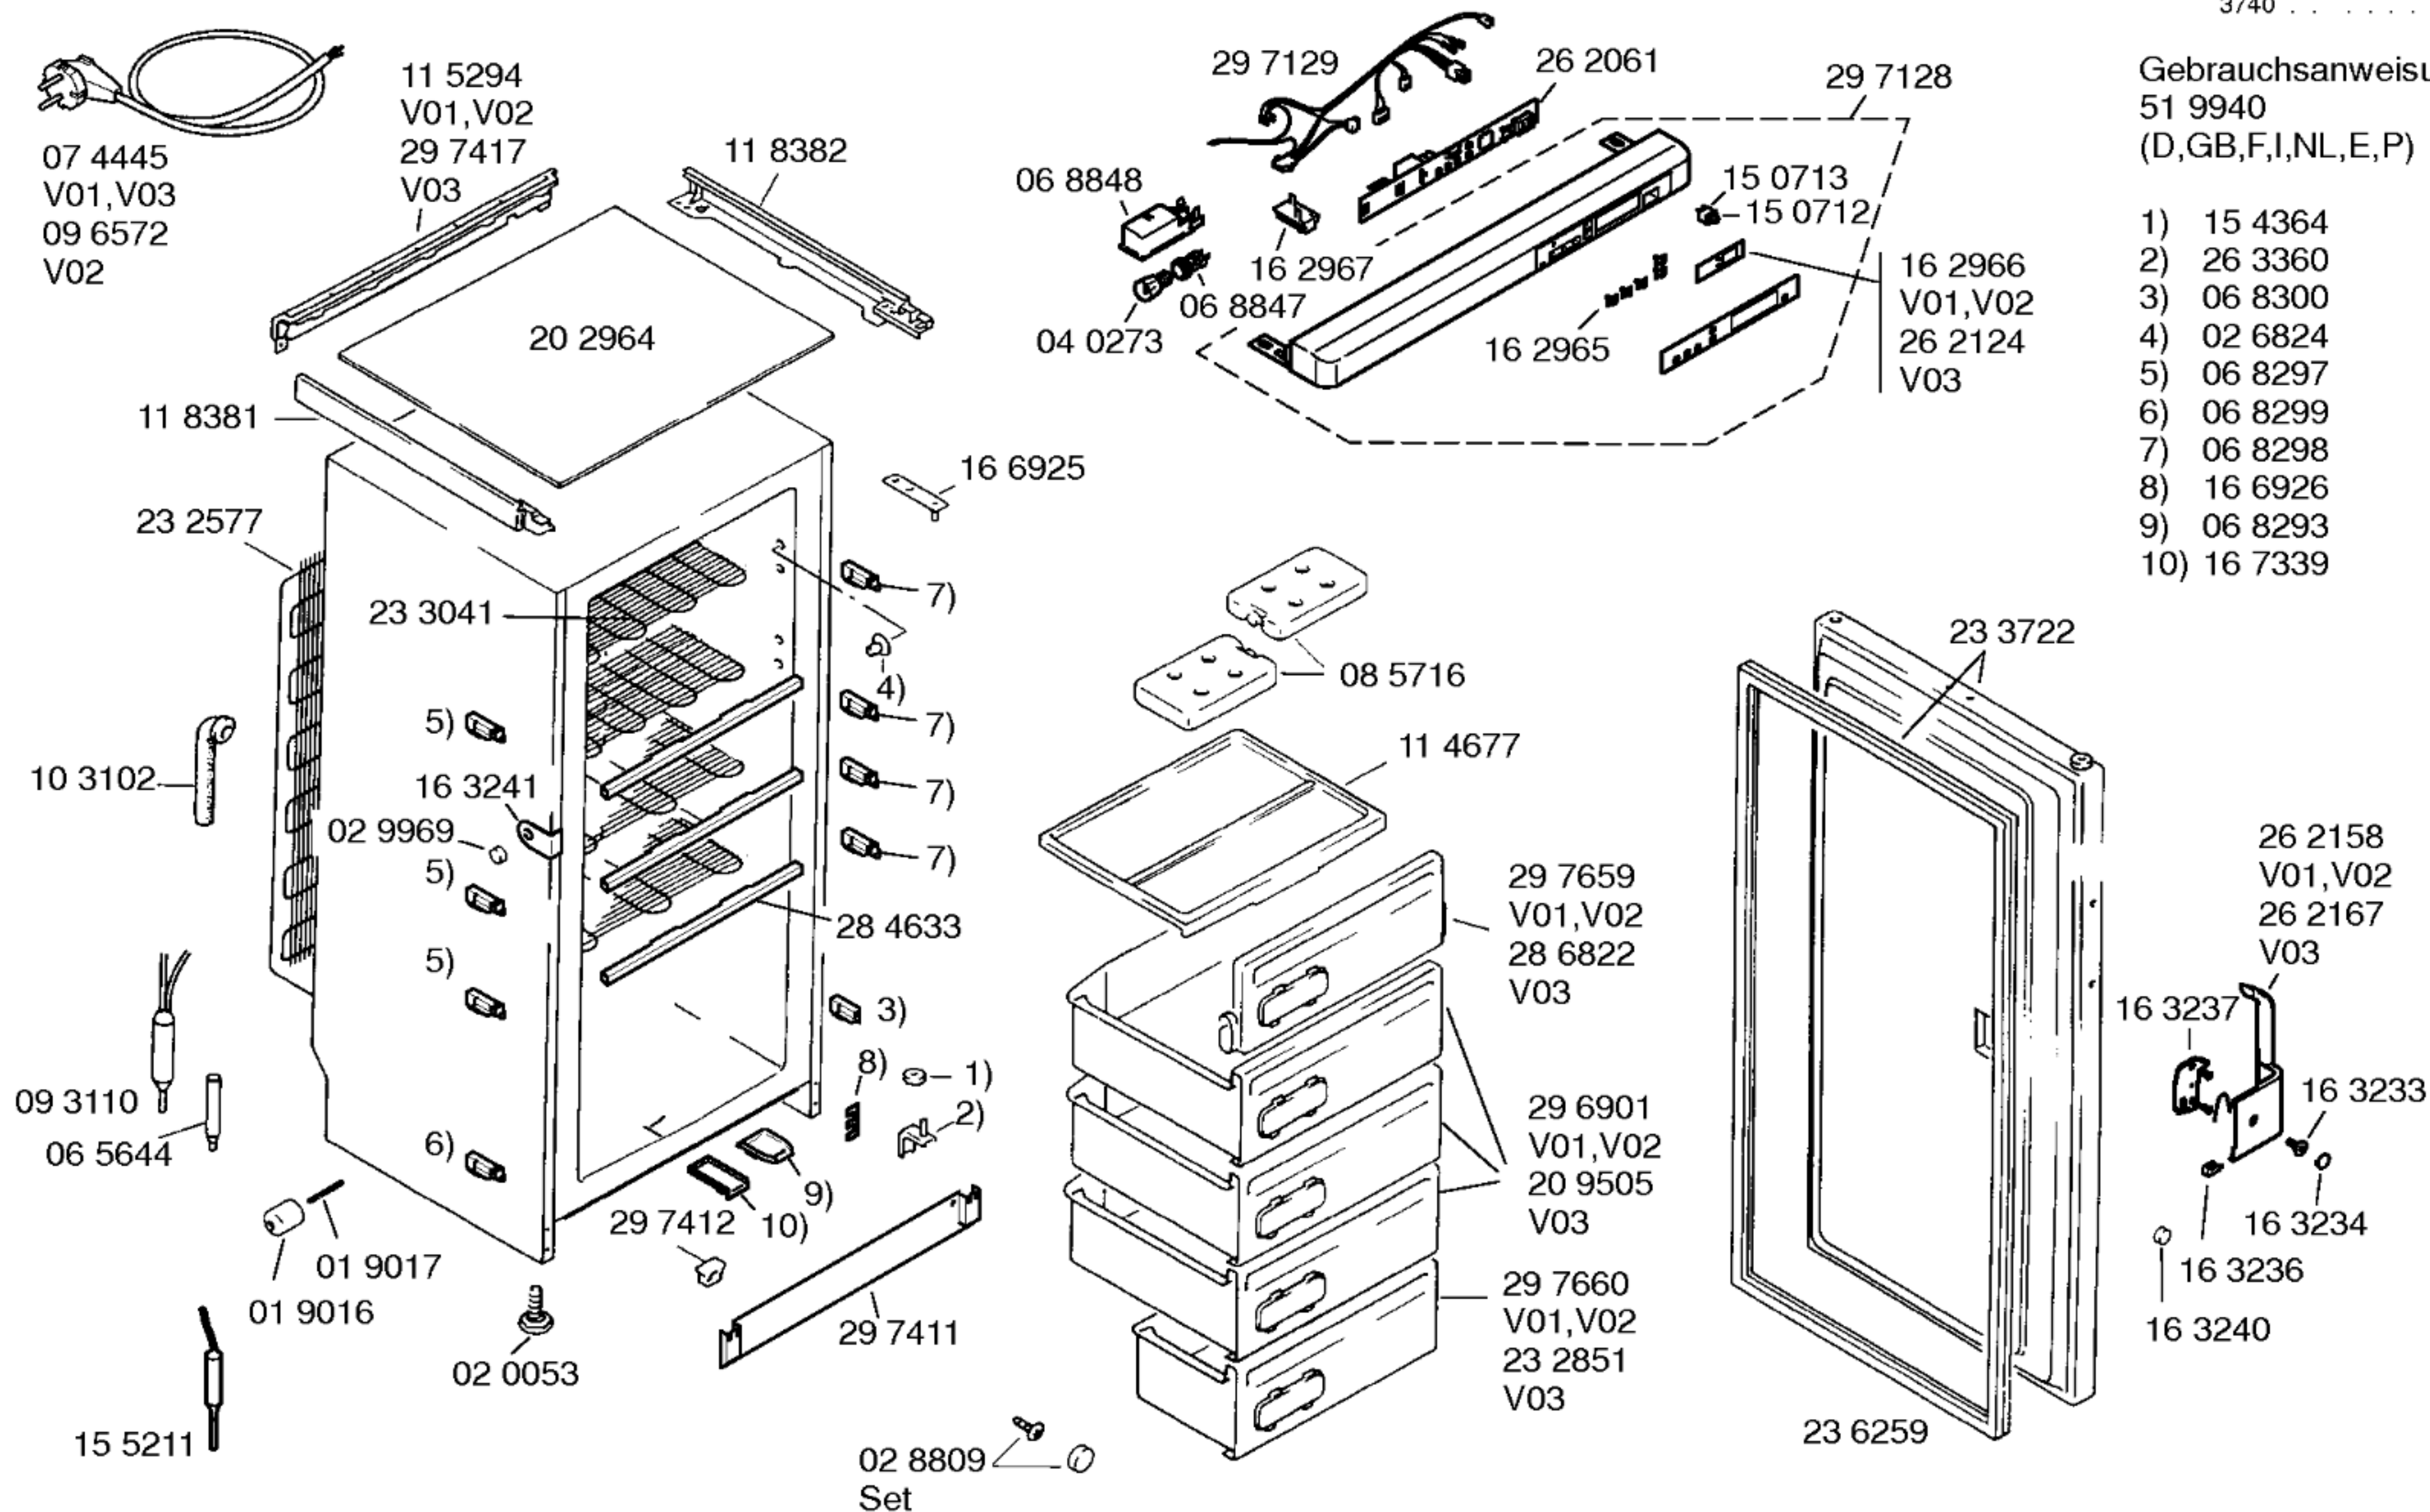


**BOSCH**

GSS2605/01-V01
GSS2605CH/01-V02
GSS2605FF/01-V03

GSS2605/42-V04
GSS2605CH/42-V05
GSS2605FF/42-V06

KÜHL-,GEFRIERGERÄTE
Gefrierschränke, Stand

Mat. – Nr. – Konstante
3740

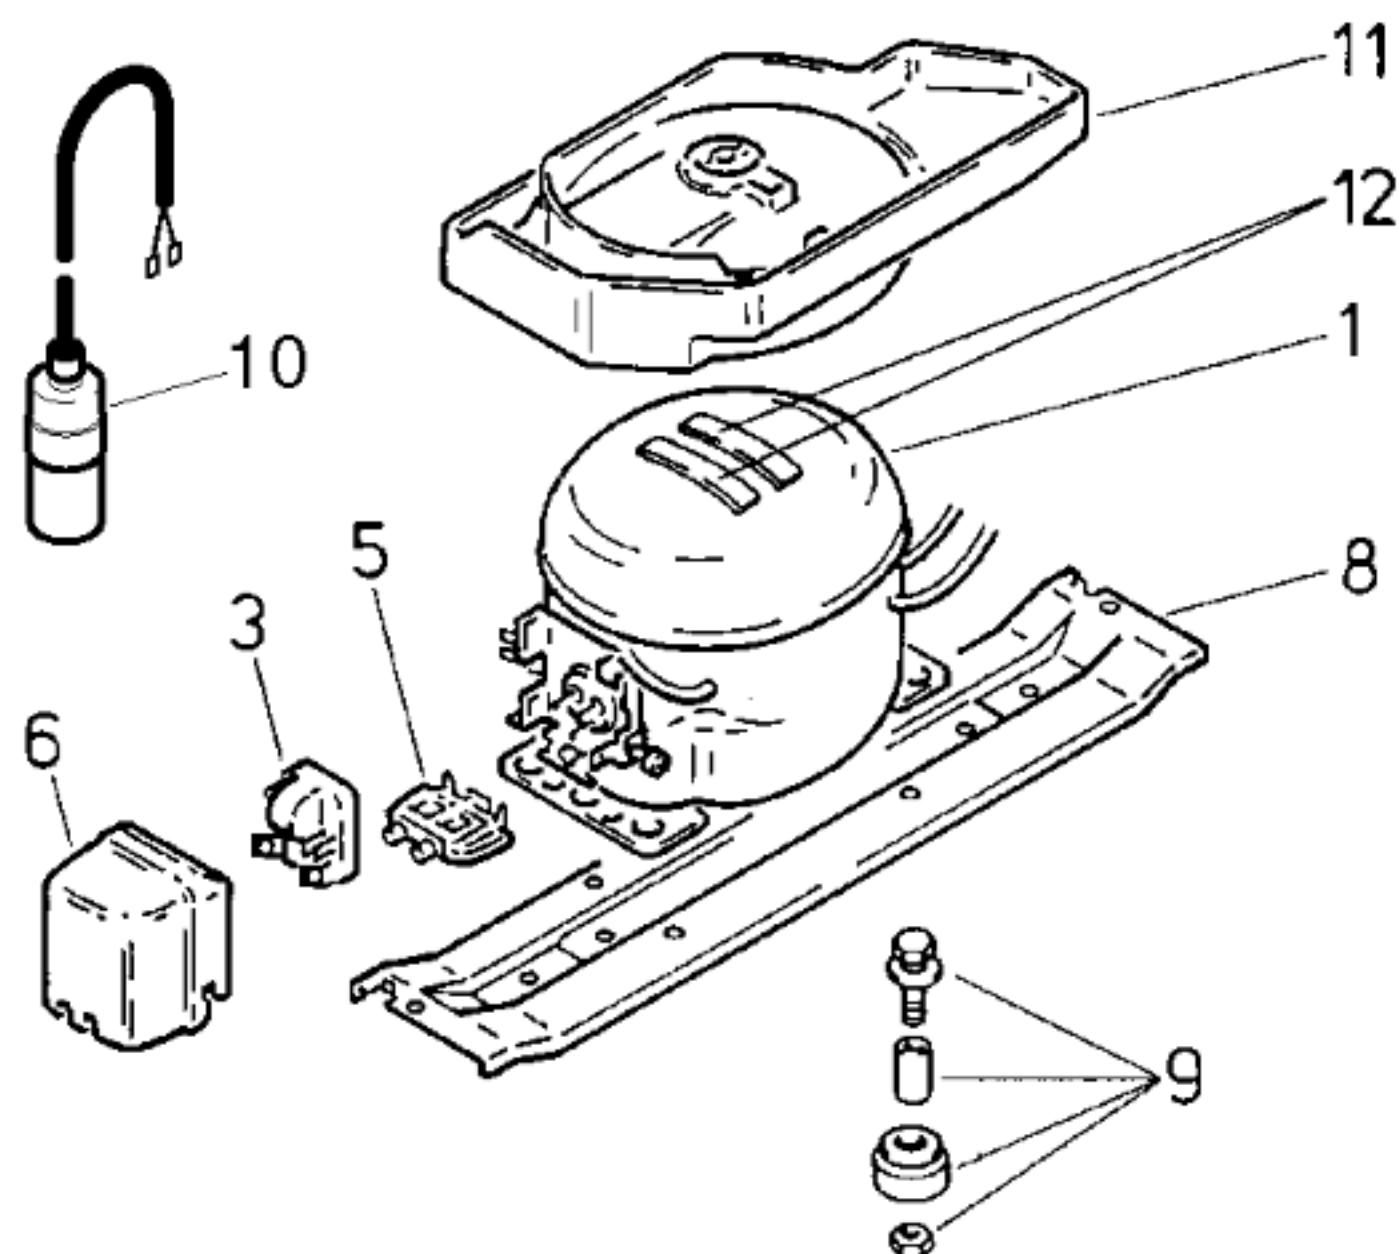

Pos.	V01-V03	V04-V06	
	Danfoss	Danfoss	
	NLY 13 K	NLY 13 K	
1	14 1621	14 1747	
2			
3	15 1055	15 1055	
4			
5	15 0760	15 0760	
6	15 1072	15 1072	
7			
8			
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Danfoss				
Typ/Type		NLY 13 K				
Förderleistung/Delivery/Débit		l/h		2394		
Anlaufstrom/Starting current/Cour de démarrage		A		11,3		
Widerstand/Resistance/Résistance		Ω		11,0		
Hi/aux		Ω		9,0		
Temp.-Regler/Thermostat		Elektronisch				
Solltemperatur-Einstellung		°C		EIN AUS		
		-18		-14 -15		
		-22		-18 -19		
		-26		-22 -23		
"alarm"				-9 -14		
Füllmenge/Fill.quantity/Charge		R600		siehe Typenschild		
Anschlußwert/Conn.load/Puiss. connectée		W				
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung		
Widerstand/Resistance/Résistance		Ω				
Leistung/Power/Puissance		W				
Ventilator/Blower/Ventilateur		Ω		340		
Widerstand NTC-Fühler		°C		kΩ		
		-1		17,3		
		-9		26,2		
		-14		34,5		
		-15		36,5		
		-16		38,8		
		-19		45,9		
		-20		48,6		
		-23		58,1		
		-24		61,6		
Magnetventil/Magnetic valve/Electrovanne		Ω				
Widerstand/Resistance/Résistance		V				
Spannung/Voltage/Tension						