



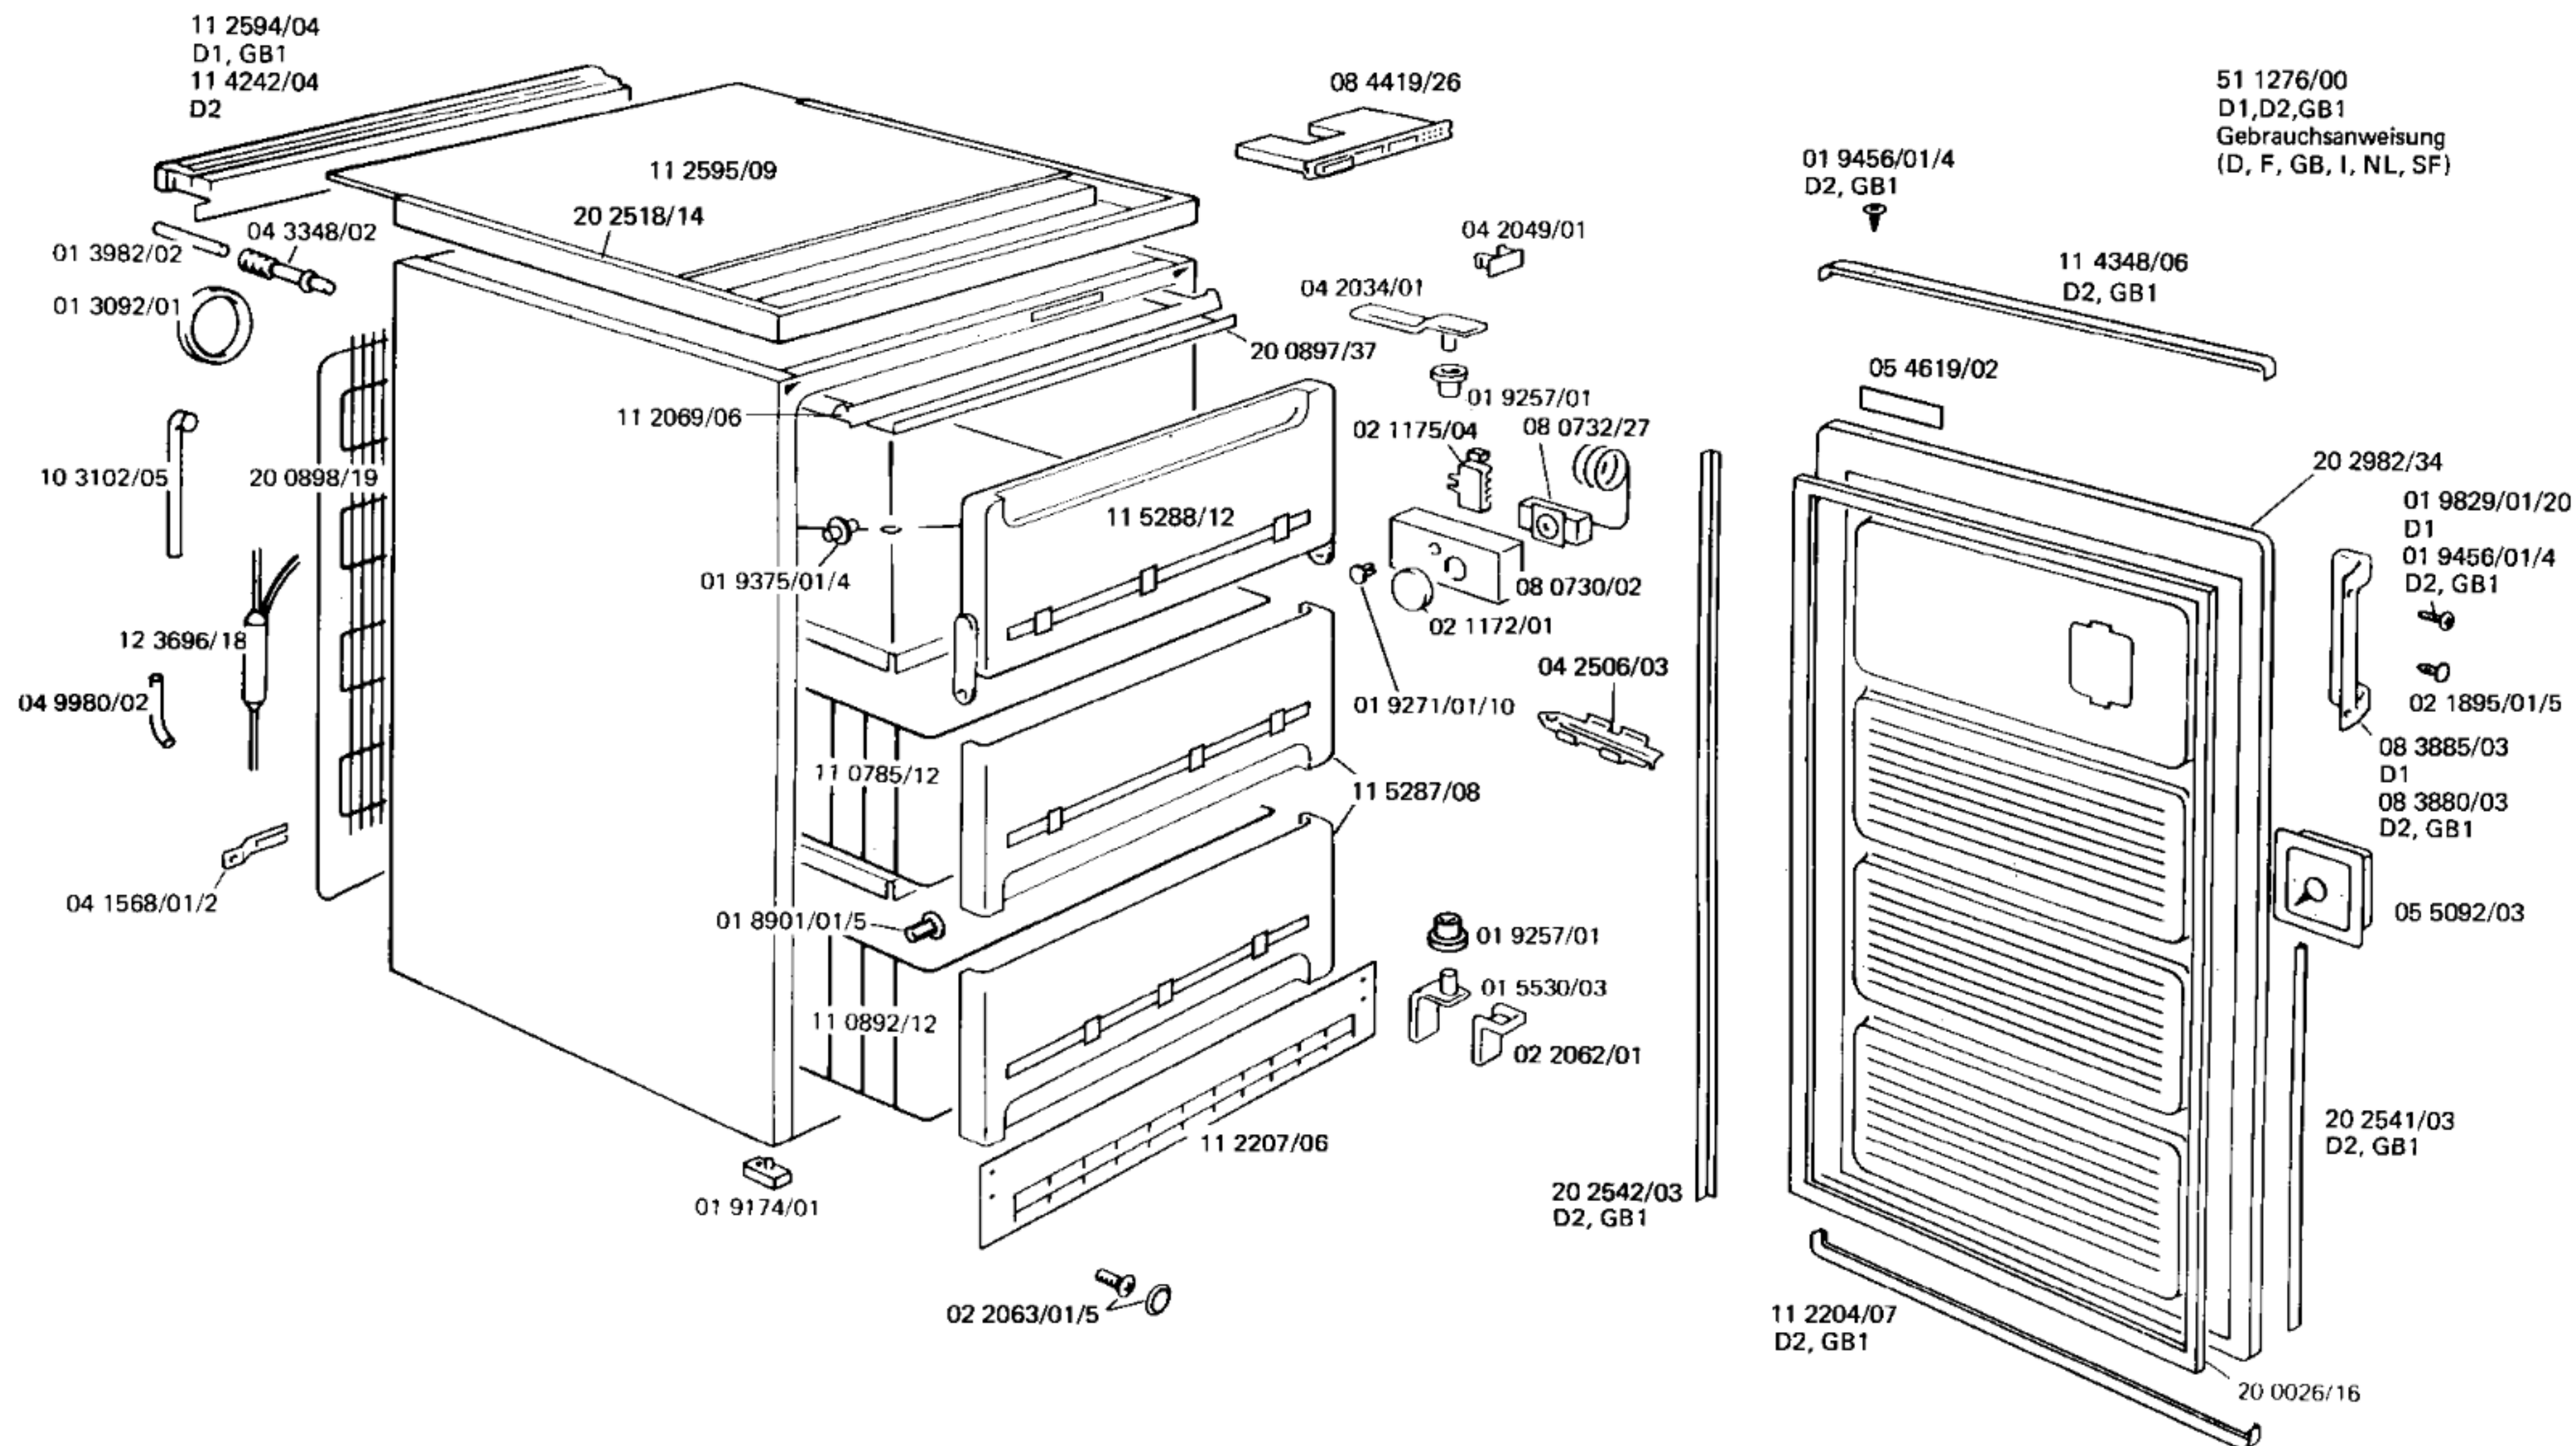

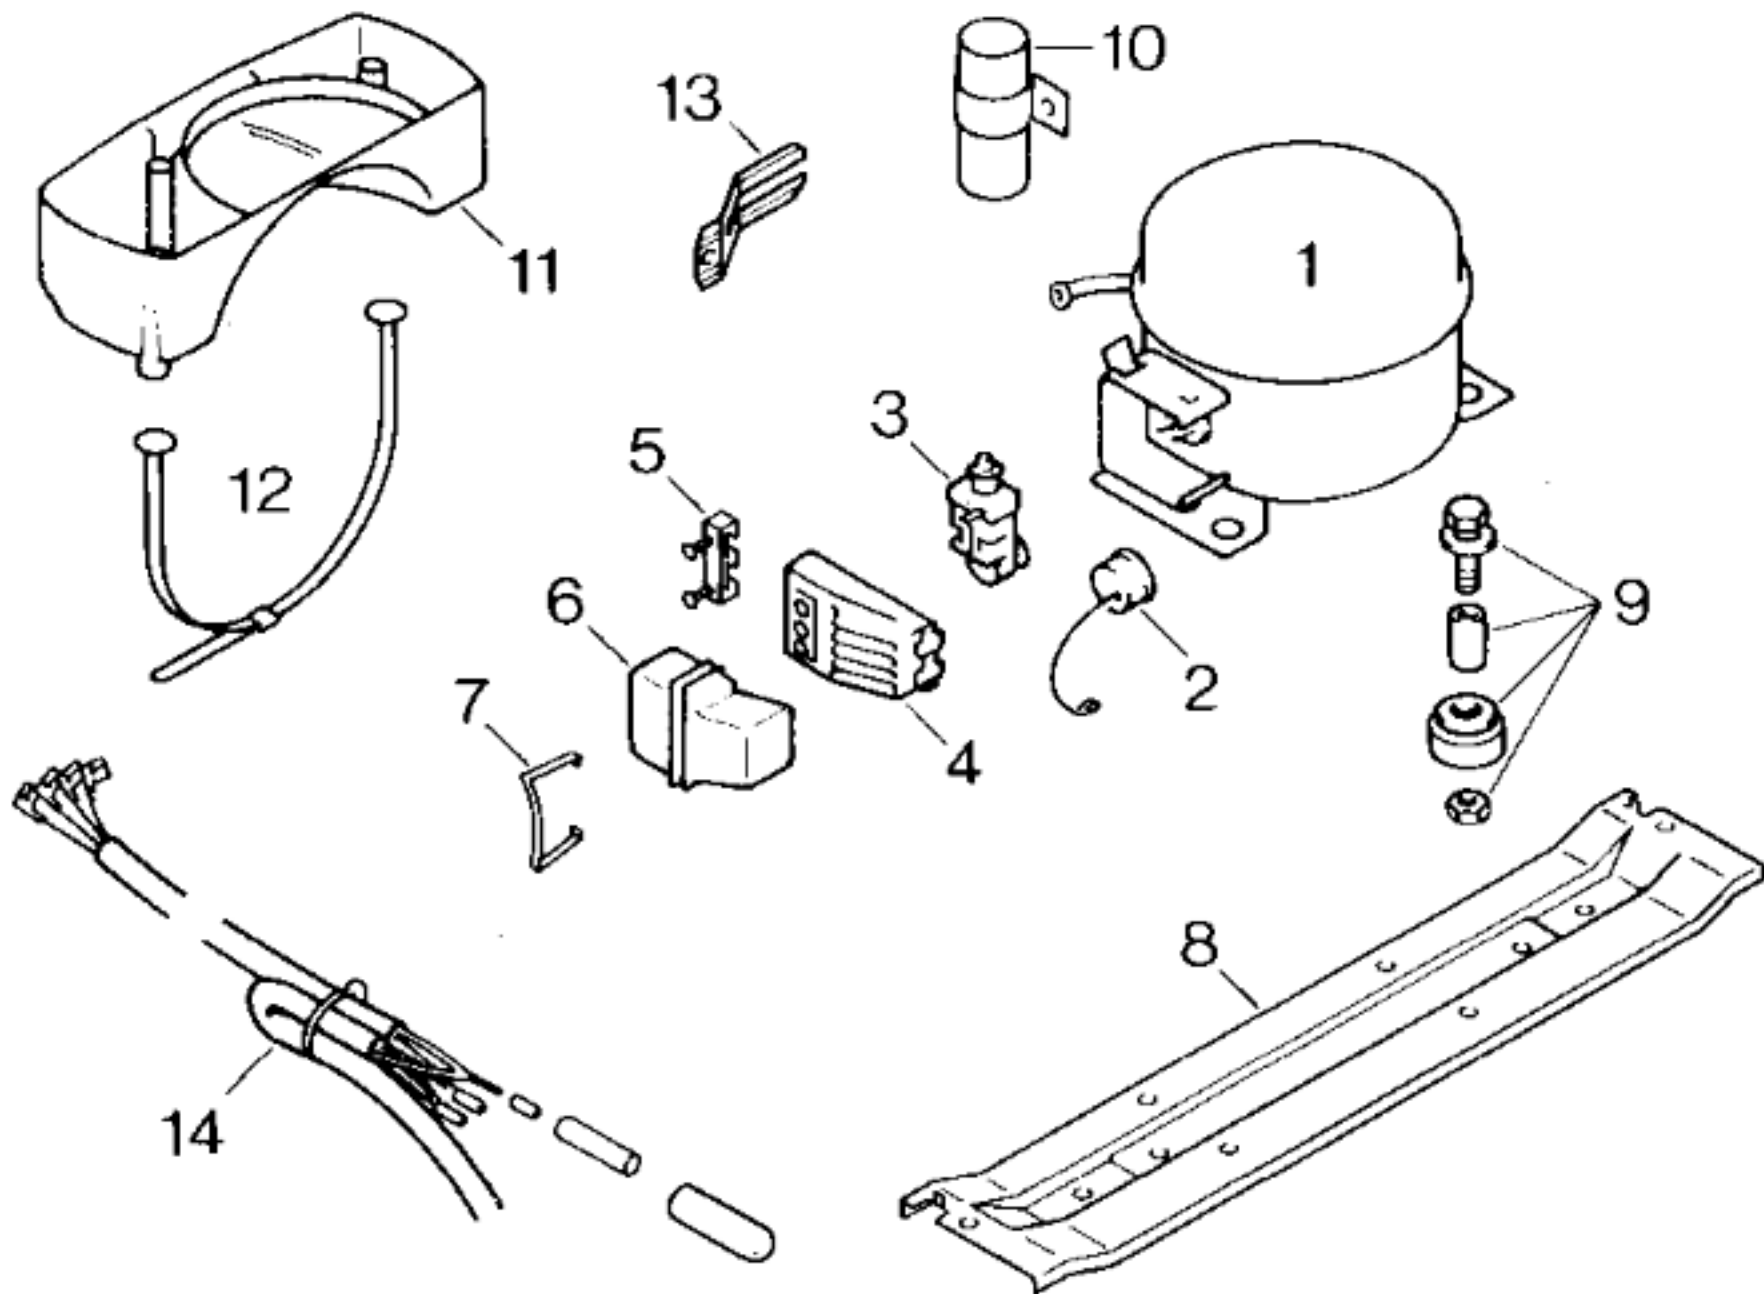

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera		
Typ/Type		BY 1112 A		
Förderleistung/Delivery/Débit	l/h	1060		
Anlaufstrom/Starting current/Cour. de démarrage	A	8,5		
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω 17,9		
	Hi/aux	Ω 43,7		
Temp.-Regler/Thermostat		M + J		
Typ/Type		TF 57 SF		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/ Valeurs de commutation	„ein“	°C - 29 - 21		
	„aus“	- 36 - 26		
	(„abtauen“ od.) „alarm“	- 20 - 15		
Füllmenge/Fill.quantity/Charge	R12	g 150		
Anschlußwert/Conn.load/Puiss. connectée	W	120		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

Pos.	Aspera			
1	14 0166/45			
2	02 2337/16			
3	02 2342/16			
4	05 1748/06			
5				
6	05 1746/01			
7	02 2339/01			
8	11 1567/03			
9	05 0166/05			
10				
11				
12				
13				
14				