



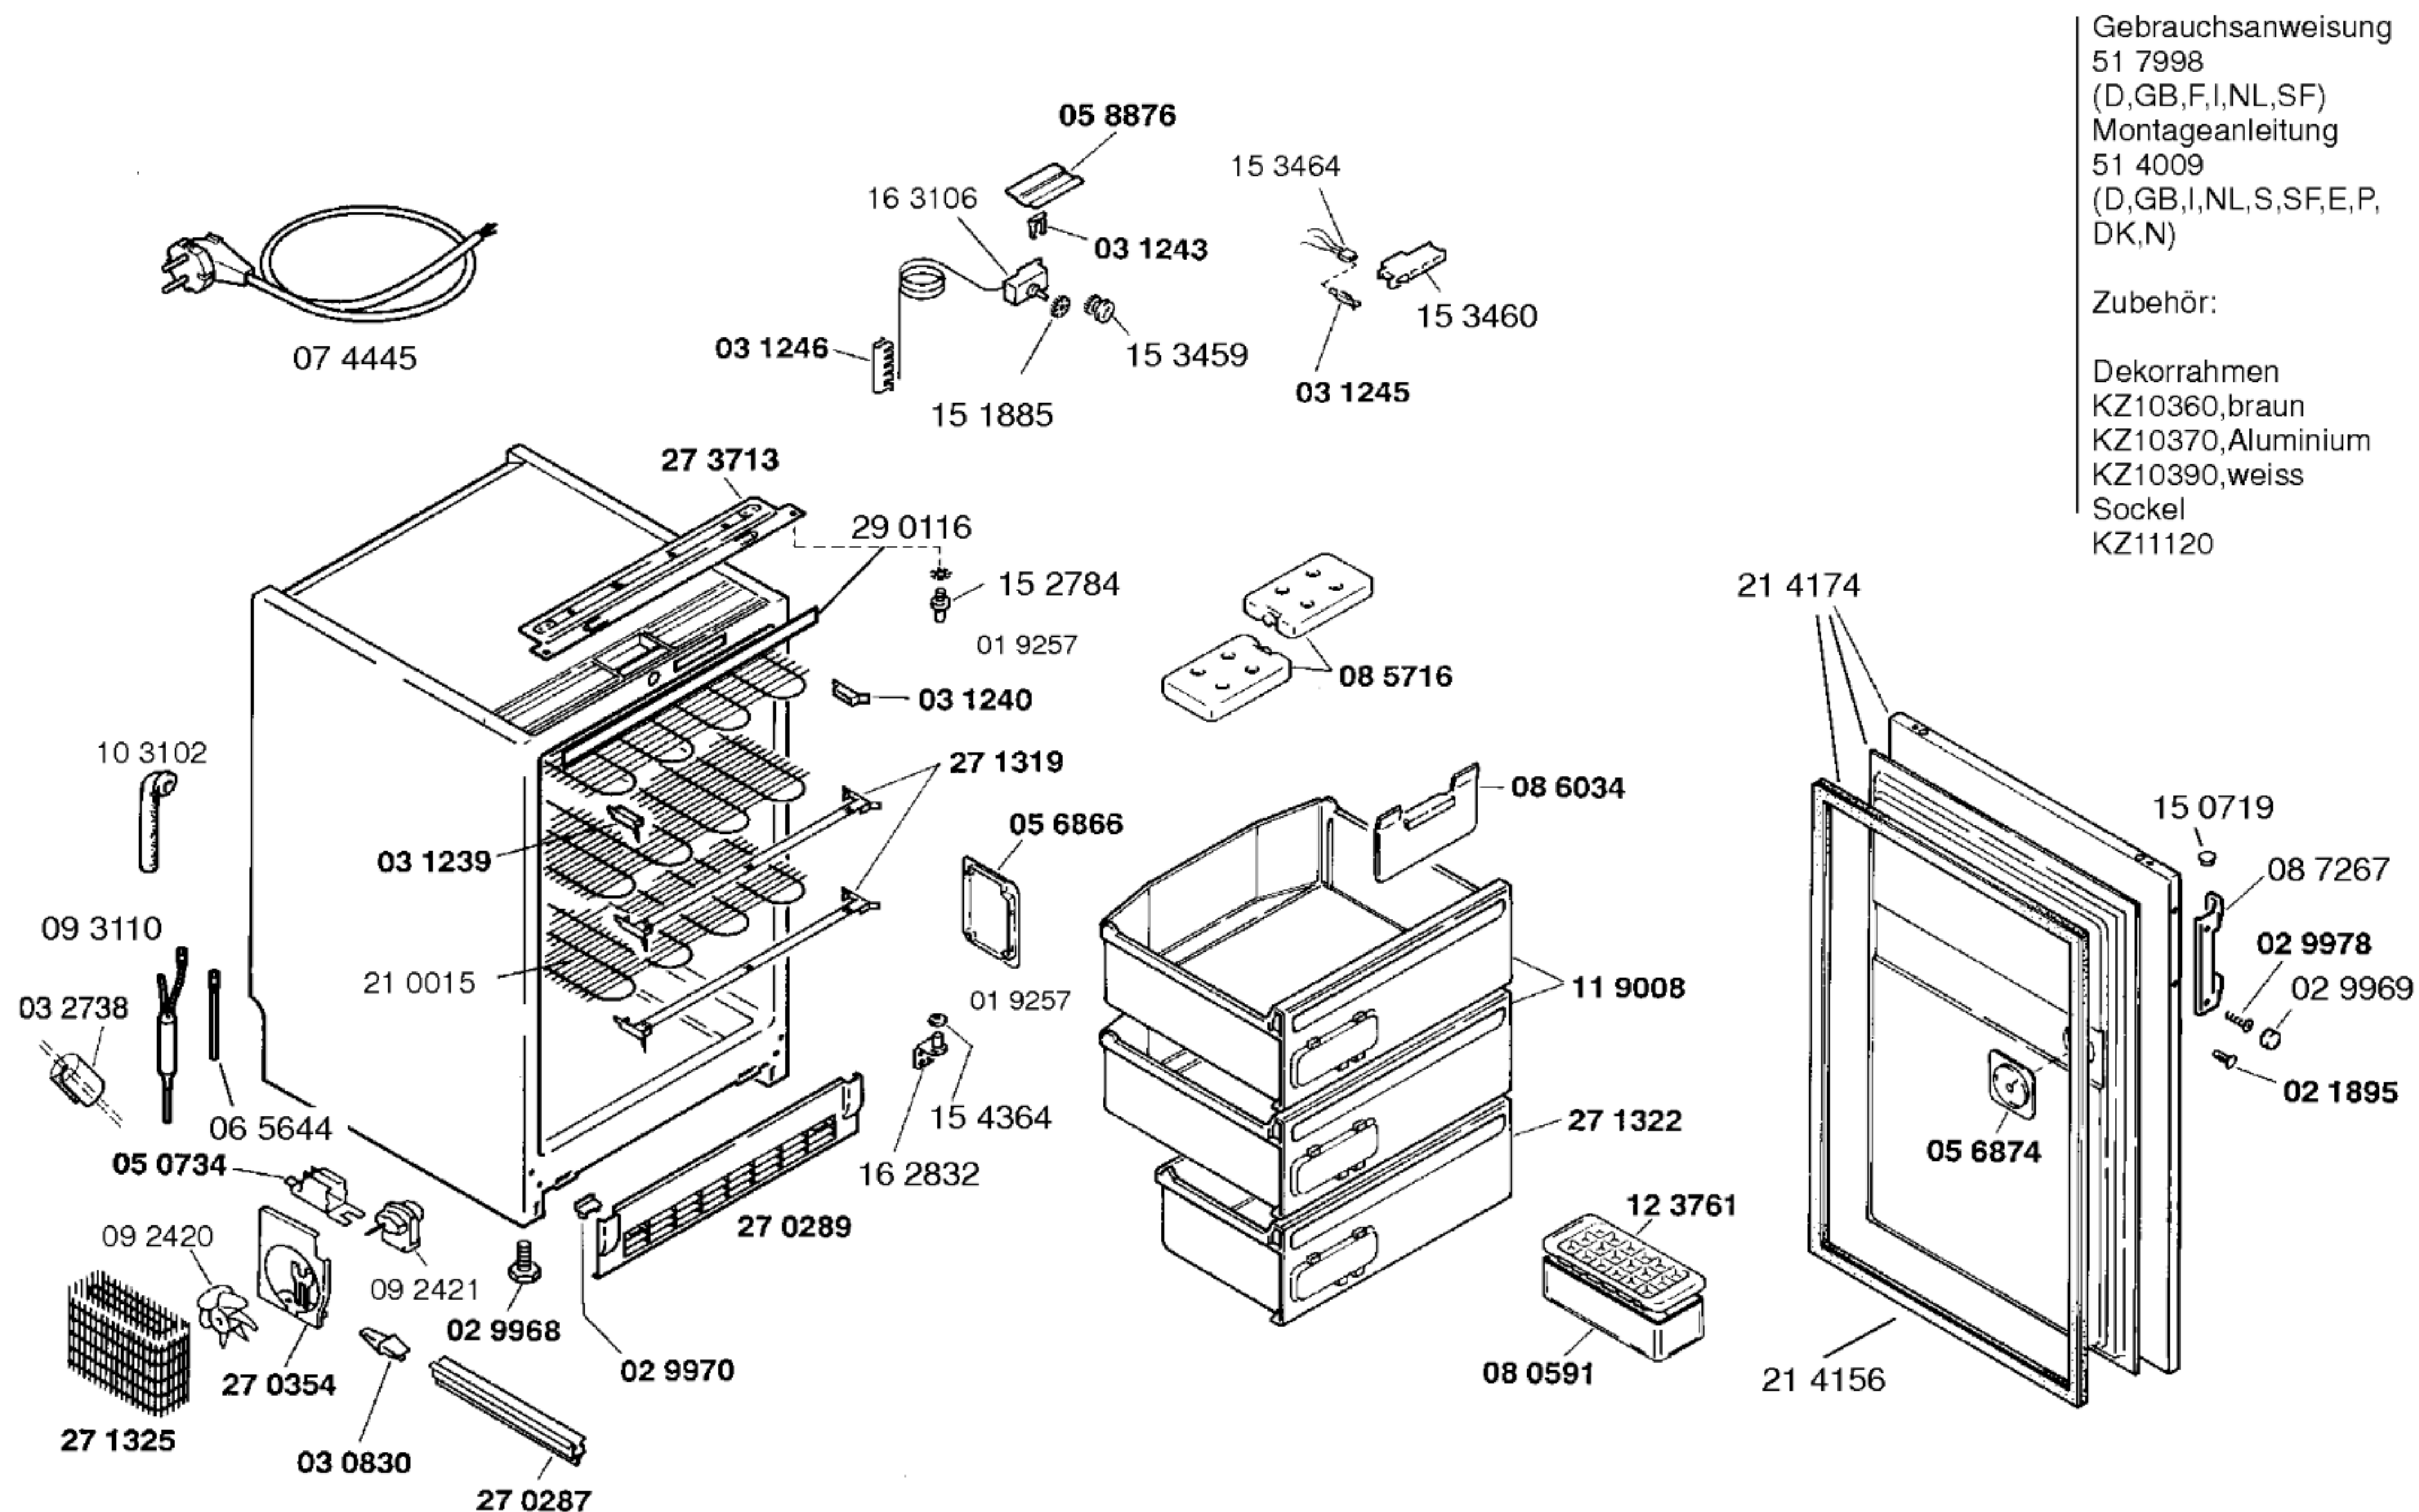

Gebrauchsanweisung
51 7998
(D,GB,F,I,NL,SF)
Montageanleitung
51 4009
(D,GB,I,NL,S,SF,E,P,
DK,N)

Zubehör:

Dekorrahmen
KZ10360, braun
KZ10370, Aluminium
KZ10390, weiss
Sockel
KZ11120

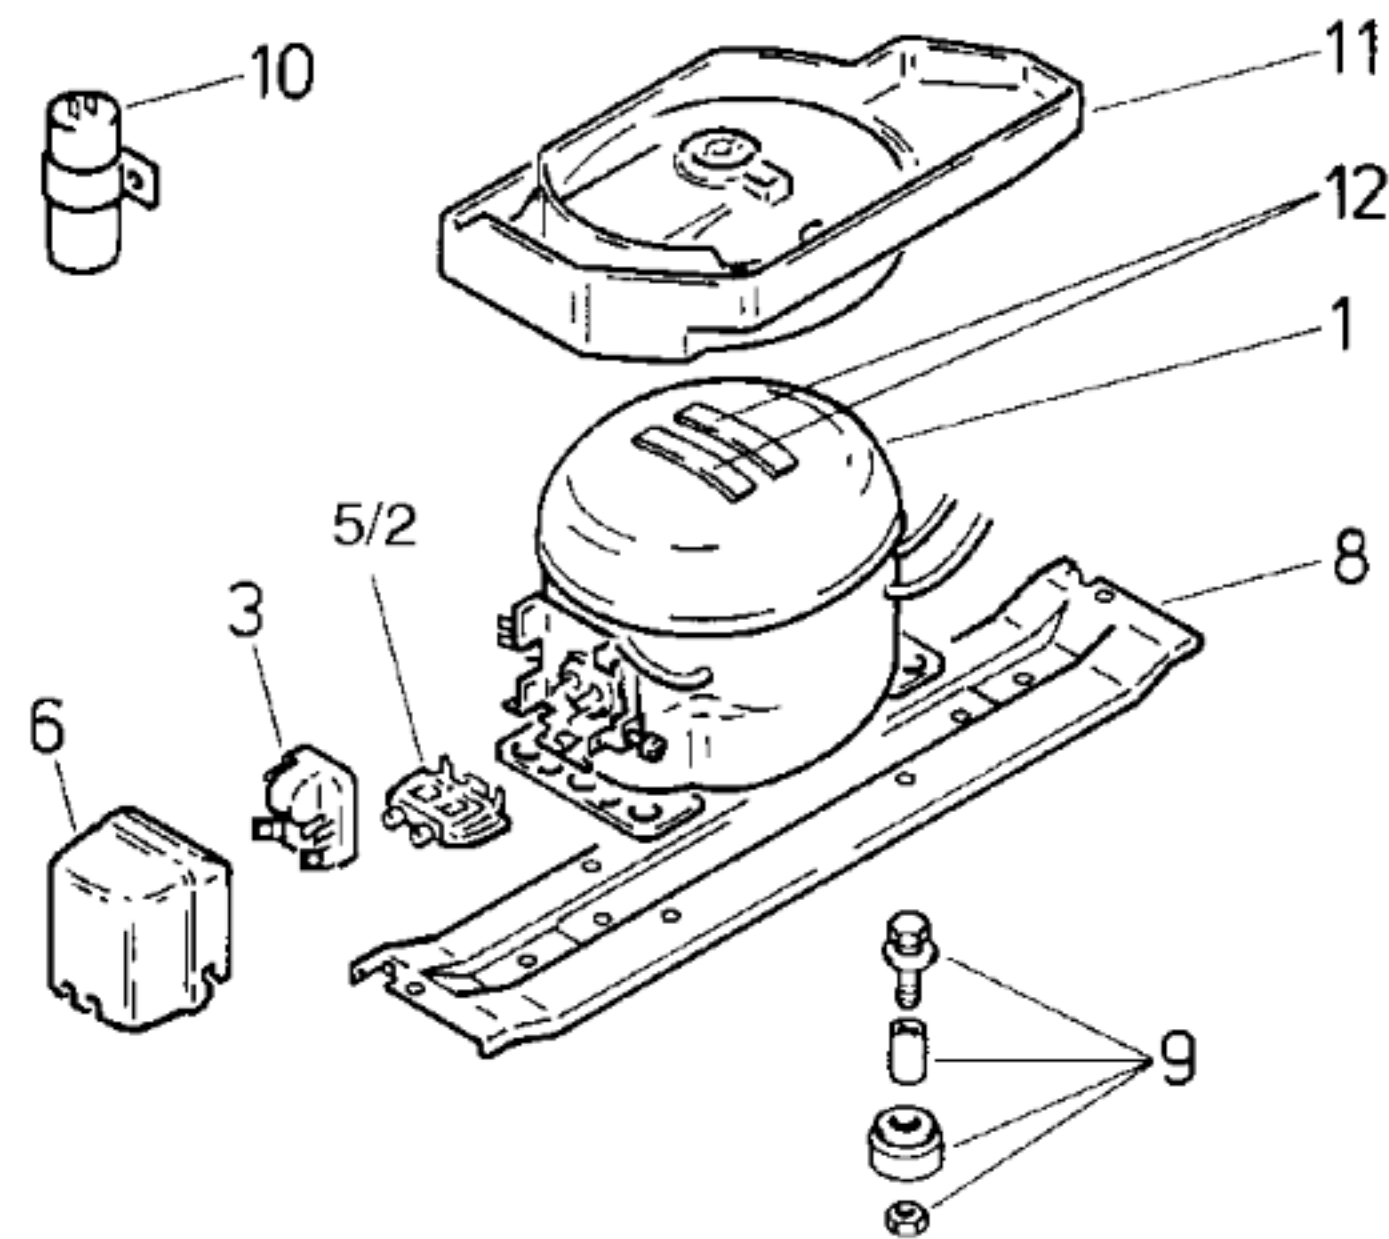

Pos.	V01
	Danfoss
1	TLES7K
2	14 1585
3	15 1053
4	15 1055
5	
6	15 0760
7	15 1072
8	
9	27 0291
10	05 0166
11	
12	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TLES7K		
Förderleistung/Delivery/Débit	l/h	1168		
Anlaufstrom/Starting current/Cour de démarrage	A	4,5		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	16,5		
	Hi/aux Ω	16,9		
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077B2192		
Reglerstellung/Position		Kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-25 -17		
Valeurs de commutation	„aus“	-33 -23		
	(„abtauen“ od.) „alarm“	-19,5 -13		
Füllmenge/Fill.quantity/Charge	R600a	g	*	
Anschlußwert/Conn.load/Puiss. connectée		W	79	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω	190		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

* siehe Typenschild