



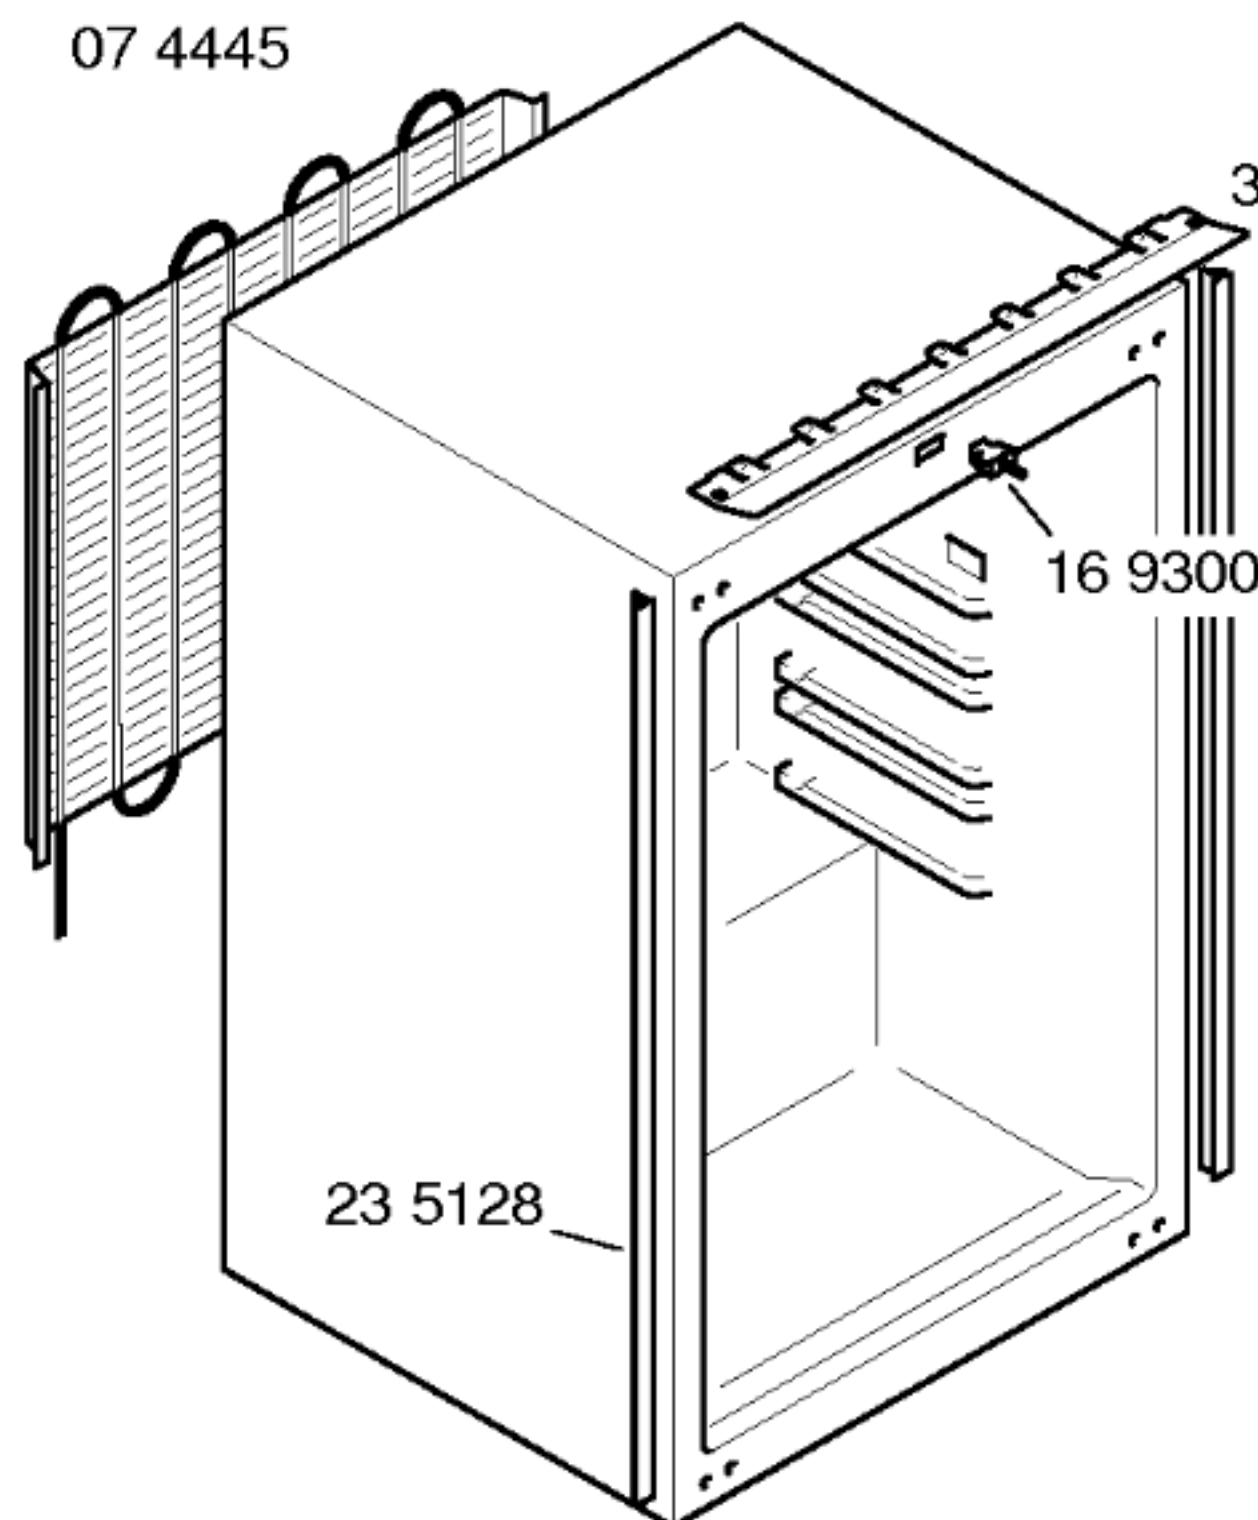

07 4445

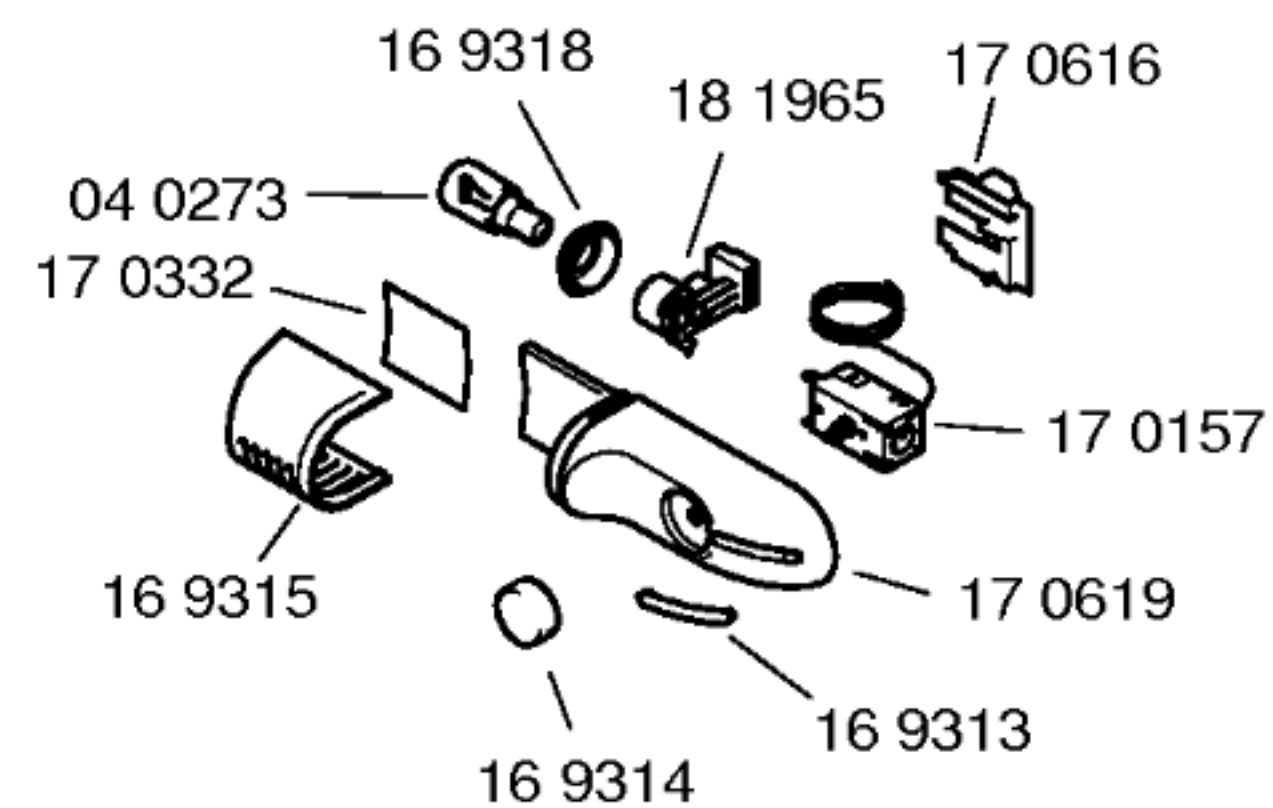

35 4305


48 1572
Set

Gebrauchsanweisung
59 0242
(de,en,it,nl)


Montageanleitung
52 3227

Beistellsatz
26 6056

09 3110



06 5644

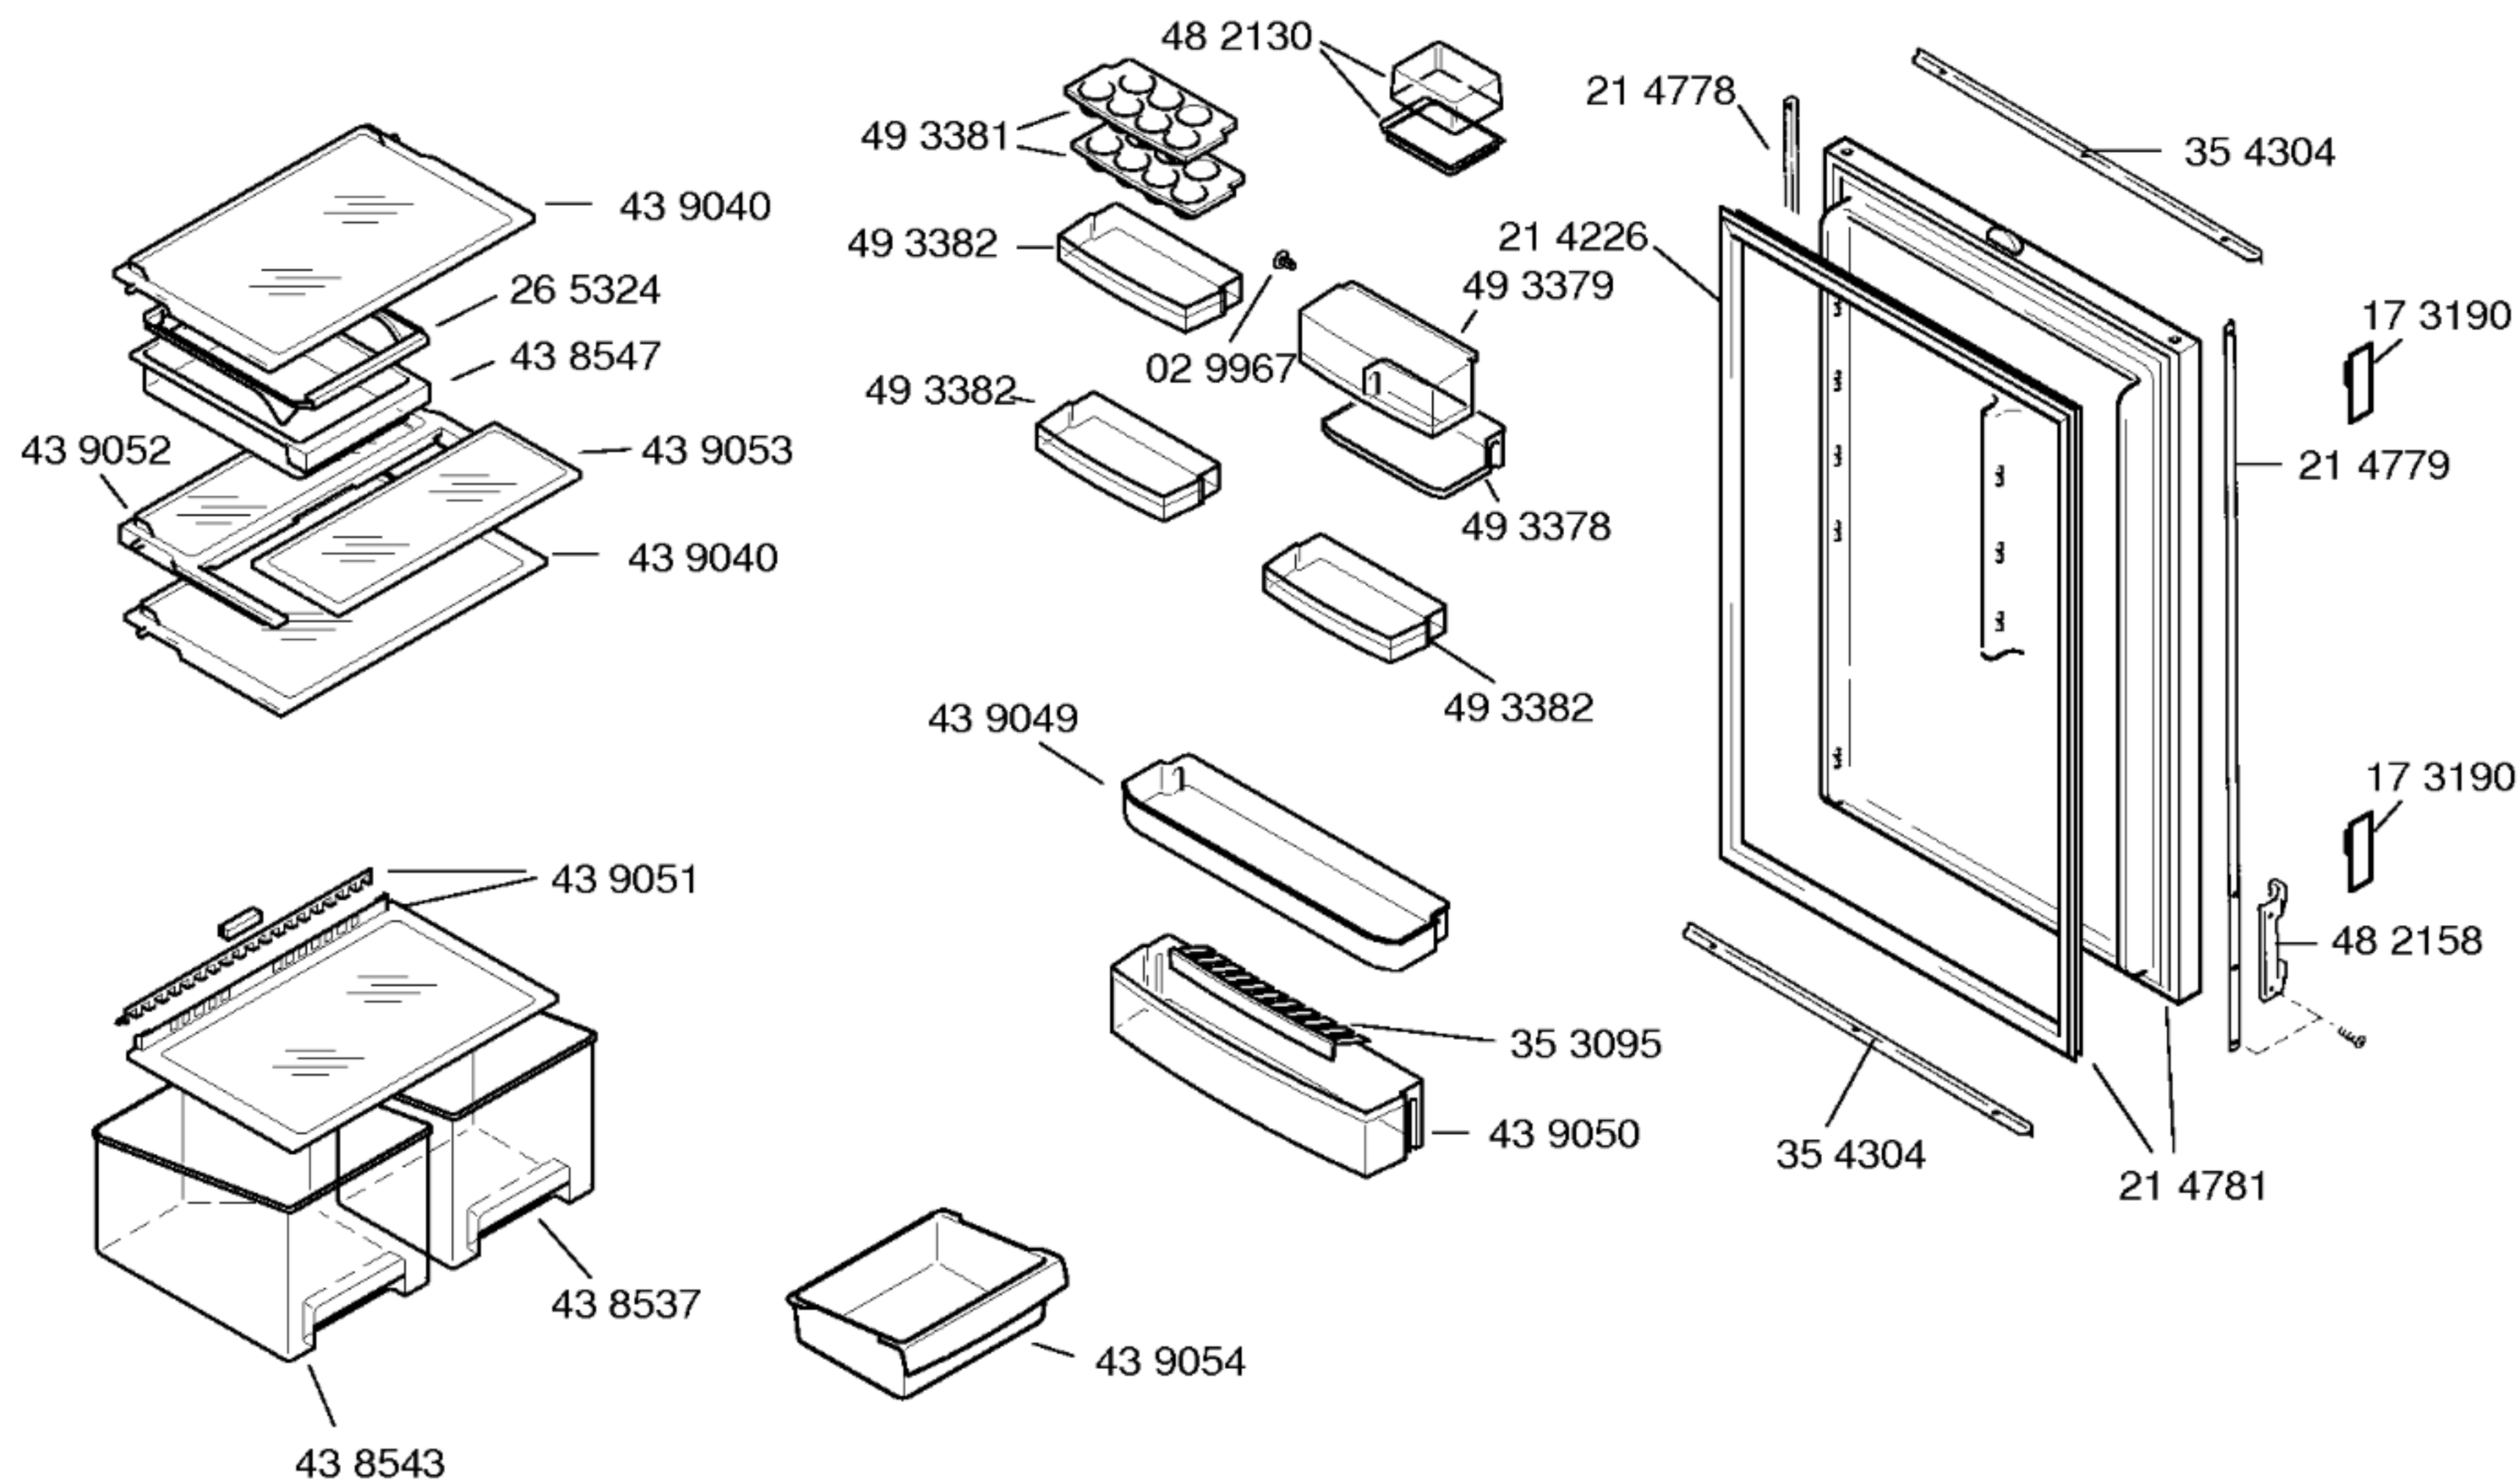

Ausgleichsblenden

braun

Z4210B1	37mm
---------	------

Z4220B1	57mm
---------	------

ALU

Z4210A1	37mm
---------	------

Z4220A1	57mm
---------	------

Dekorrahmen

braun


Z4130B1	880mm
---------	-------

Z4160B1	1225mm
---------	--------

Torx-Schraube 3,5x16

für Dekorrahmen

17 3166

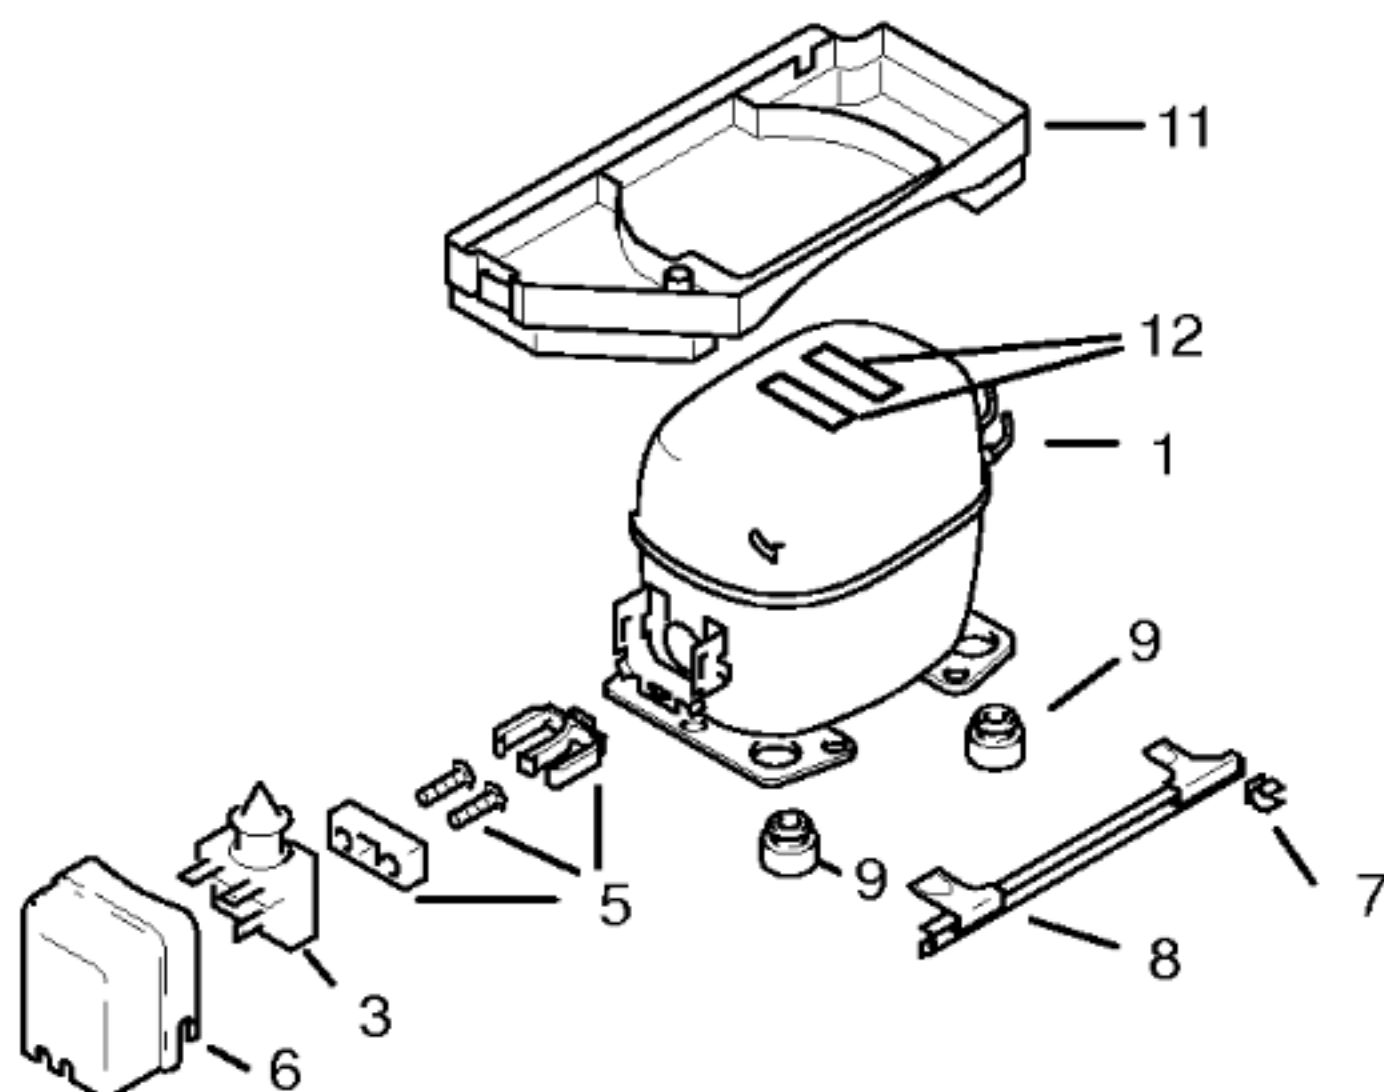

	V01		
	Danfoss		
Pos.	TLY4KK2		
1	14 2057		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7	16 9319		
8	26 4879		
9	050166		
10			
11	26 4878		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	
Typ/Type		TLY4KK2	
Förderleistung/Delivery/Débit	l/h	695	
Anlaufstrom/Starting current/Cour de démarrage	A	5,9	
Widerstand/Resistance/Résistance	W	49,0	
	Hi/aux	15,0	
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K59	
Regelstellung/Position		kalt	warm
Schaltwerte/Switching values	"warm"	+5,0	+5,0
Valeurs de commutation	"kalt"	-23,0	-10,0
	"alarm"		
Füllmenge/Fill.quantity/Charge	R600a	*	*
Anschlußwert/Conn.load/Puiss. connectée	W	44	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	W		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	W		
Temp.-Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	W		
Spannung/Voltage/Tension	V		

* siehe Typenschild