


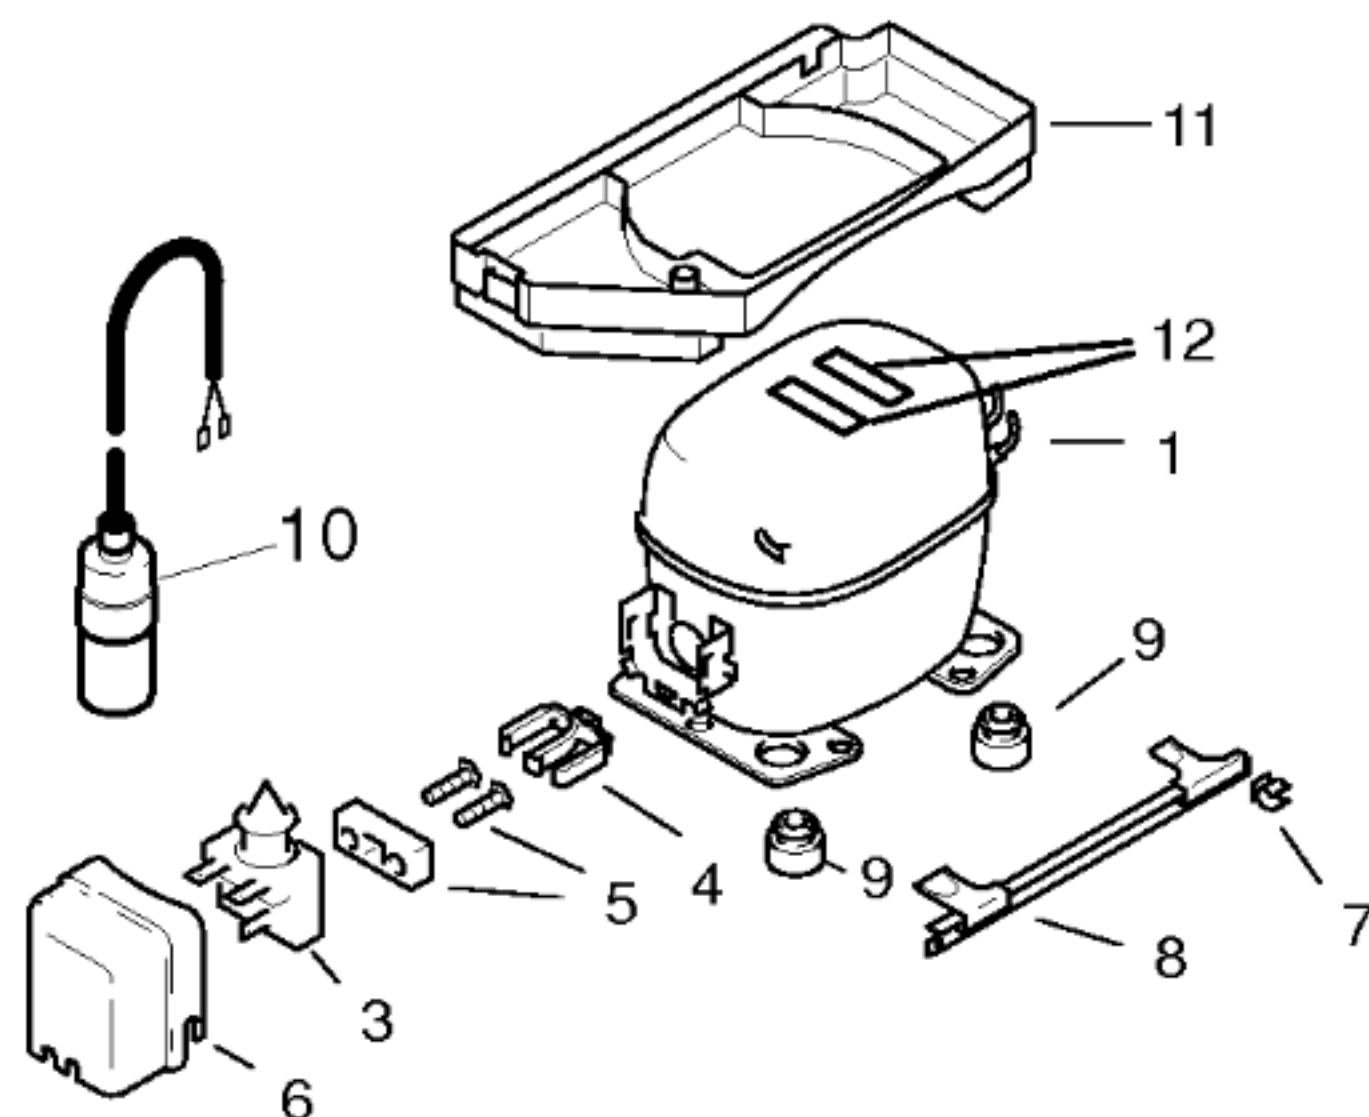

	V01	V02	V03
Pos.	Aspera	Danfoss	Matsushita
	EMT 40 CLP	TLY7KK2	ESS 60E
1	14 1839	14 2059	14 2158
2			
3	17 1315	15 1055	18 3589
4			
5	17 0882	15 0760	18 3590
6	17 0881	15 1072	18 3591
7	16 9319	16 9319	16 9319
8	26 4879	26 4879	26 4879
9	05 0166	05 0166	05 0166
10		16 5852	
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur	Aspera	Danfoss	Matsushita
Typ/Type	EMT 40 CLP	TLY7KK2	ESS 60E
Förderleistung/Delivery/Débit	l/h	1168	1076
Anlaufstrom/Starting current/Cour de démarrage	A	5,7	5,6
Widerstand/Resistance/Résistance Ha/main/prin	Ω	27,1	30,6
Hi/aux	Ω	27,2	26,7

Temp.-Regler/Thermostat	KER		
Typ/Type	RCO		
Regelstellung/Position	kalt	warm	
Schaltwerte/Switching values	ein"	-23,0	-15,0
Valeurs de commutation	aus"	-31,0	-21,0
	"alarm"		

Füllmenge/Fill.quantity/Charge	R600a	*	
--------------------------------	-------	---	--

Anschlußwert/Conn.load/Puiss. connectée	W	88	71	63
---	---	----	----	----

Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		

Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		

Temp.-Regler/Thermostat			
-------------------------	--	--	--

Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild