



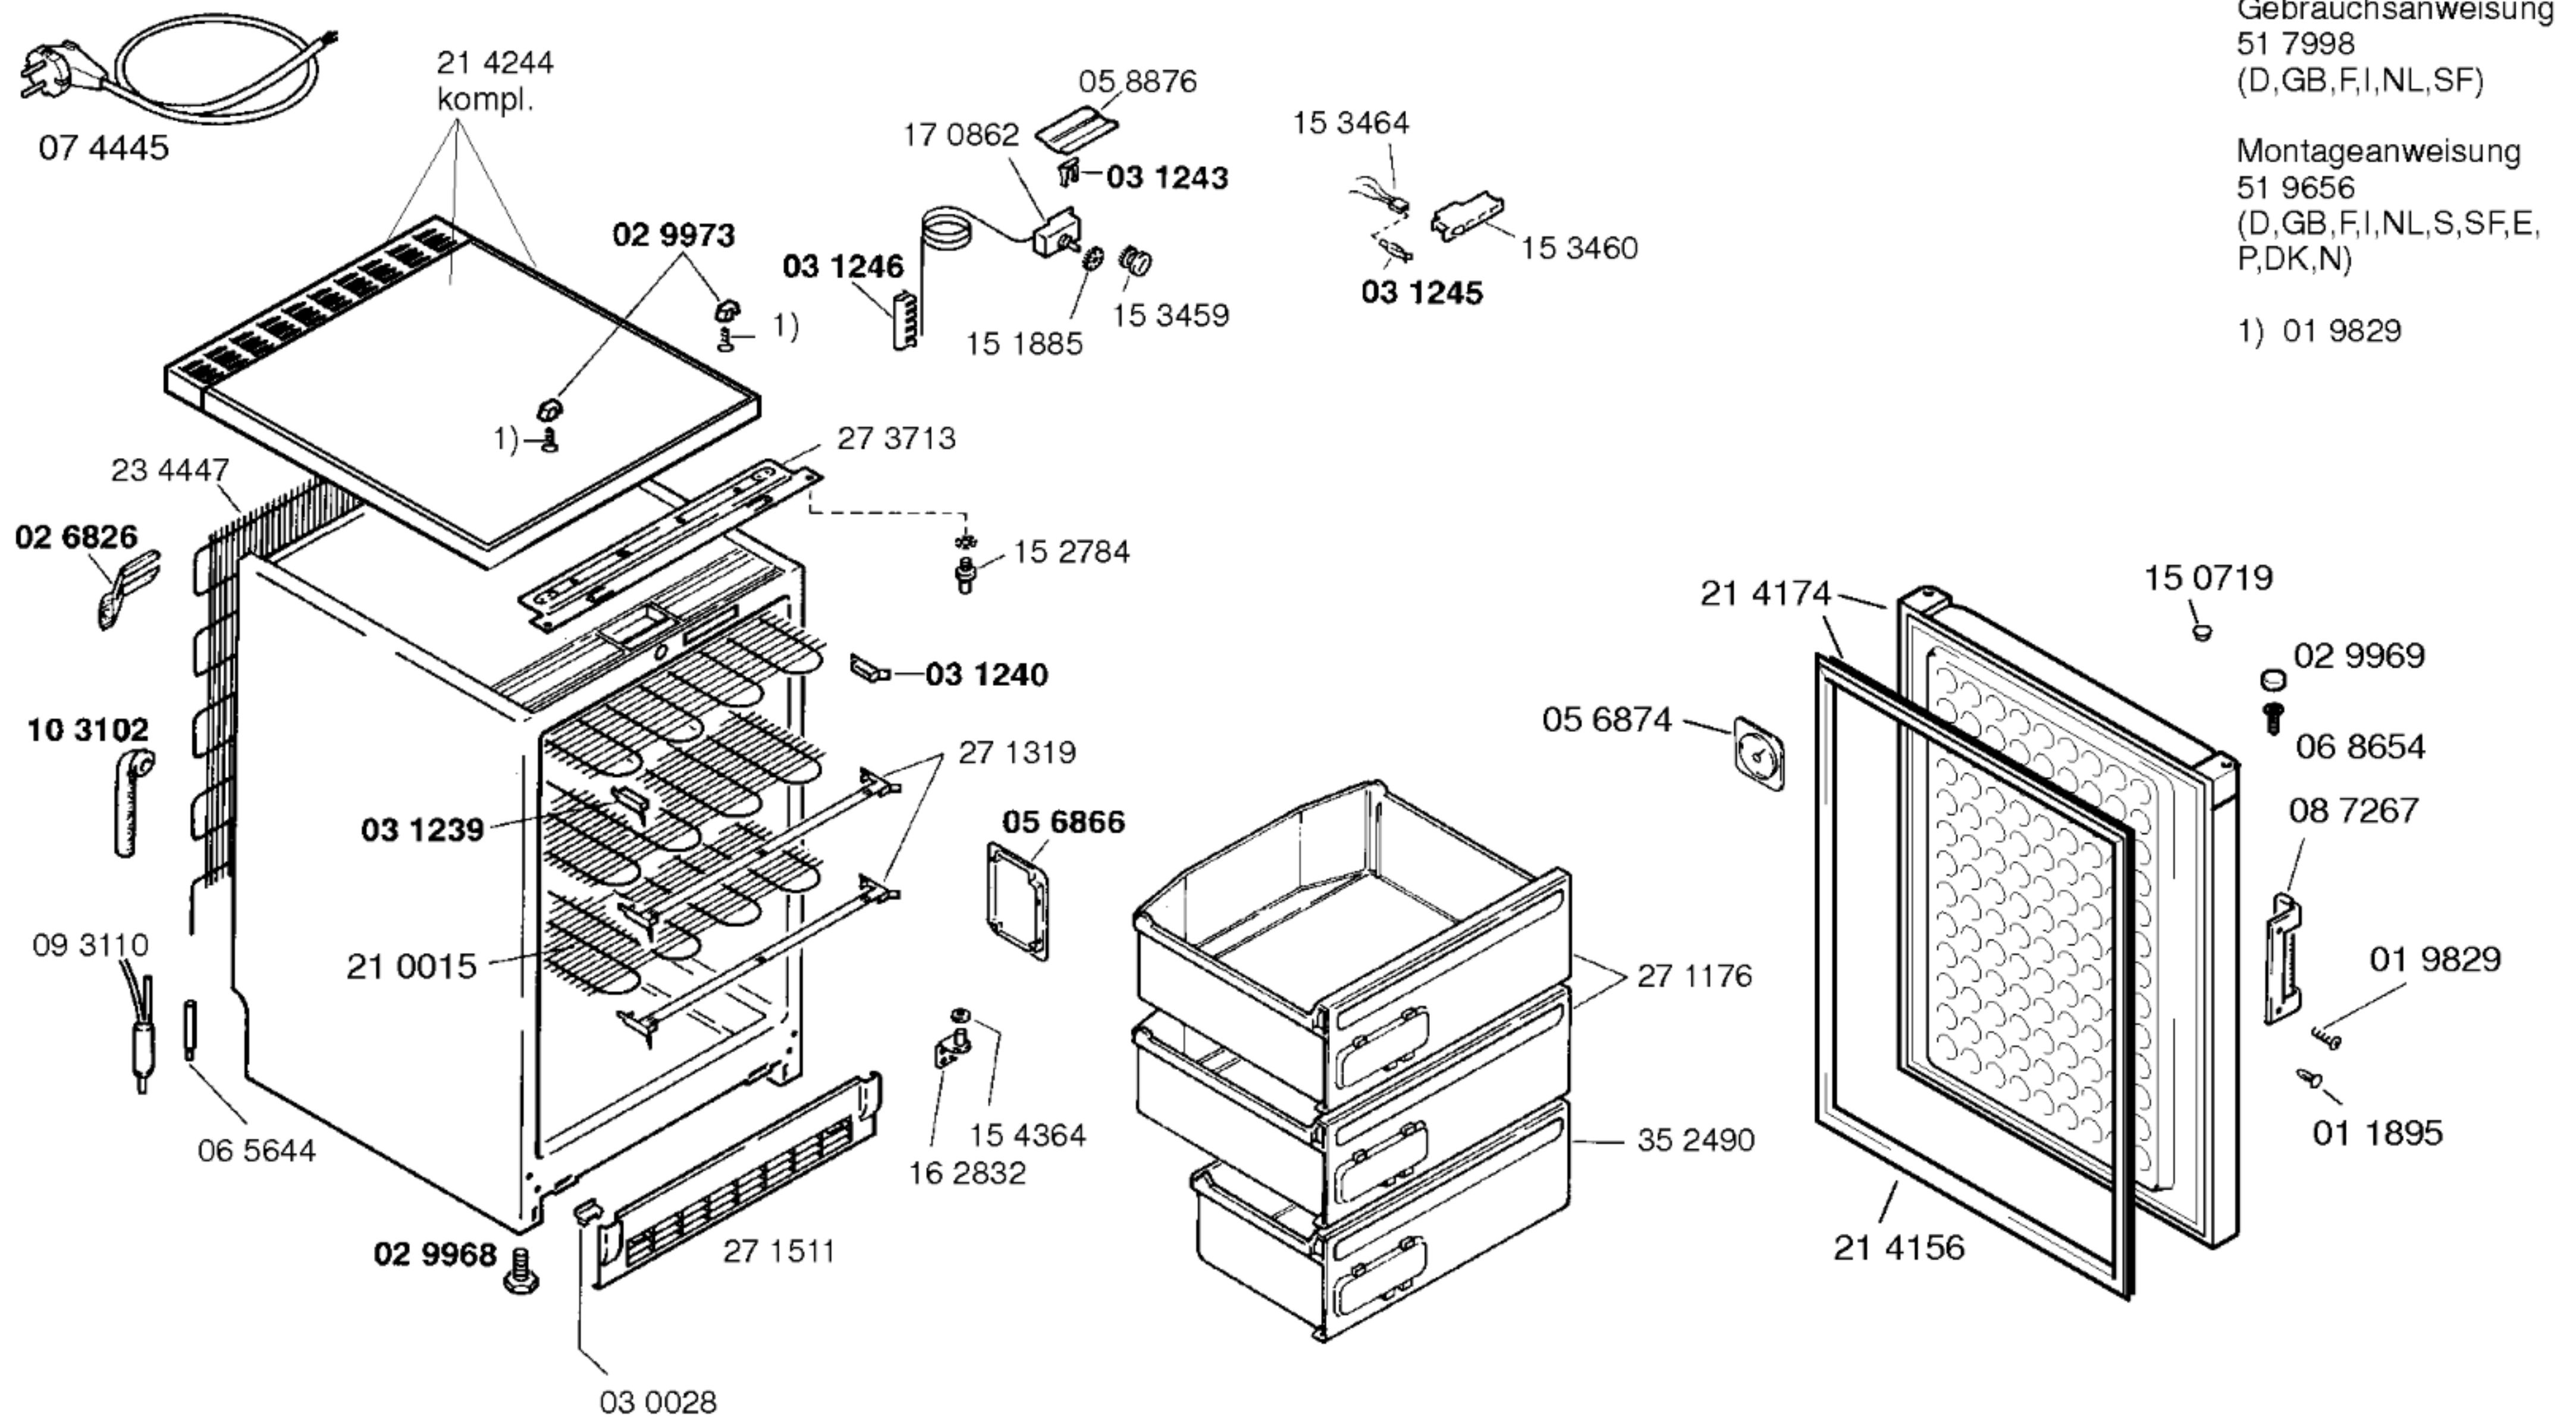

Gebrauchsanweisung
51 7998
(D,GB,F,I,NL,SF)

Montageanweisung
51 9656
(D,GB,F,I,NL,S,SF,E,
P,DK,N)

1) 01 9829

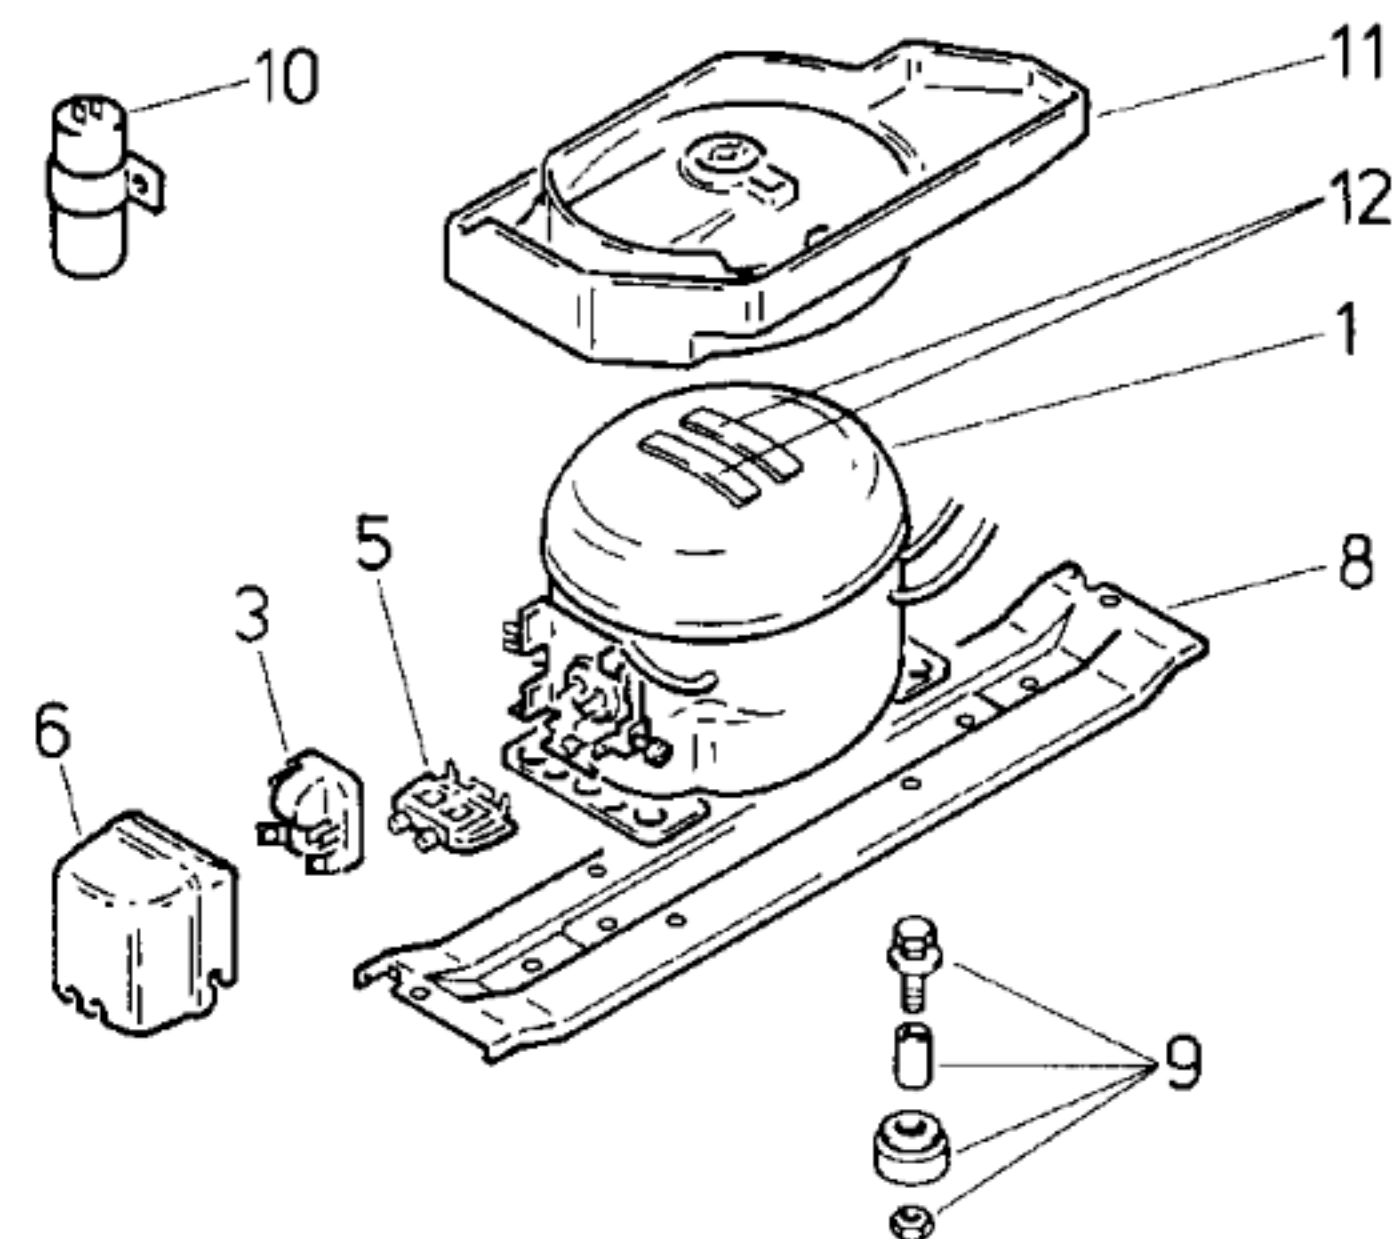

Pos.			
	Matsushita		
	SD 65 E		
1	14 1316		
2			
3	15 3306		
4			
5	15 3865		
6	15 3303		
7			
8	27 1375		
9	05 0166		
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		SD 65 E		
Förderleistung/Delivery/Débit		l/h	1170	
Anlaufstrom/Starting current/Cour de démarrage		A	5,5	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	29,8	
		Hi/aux Ω	31,8	
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 SF2		
Reglerstellung/Position			kalt	warm
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	-25	-17
Valeurs de commutation		„aus“	-33	-23
		(„abtauen“ od.) „alarm“	-19,5	-13
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée		W	78	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild