


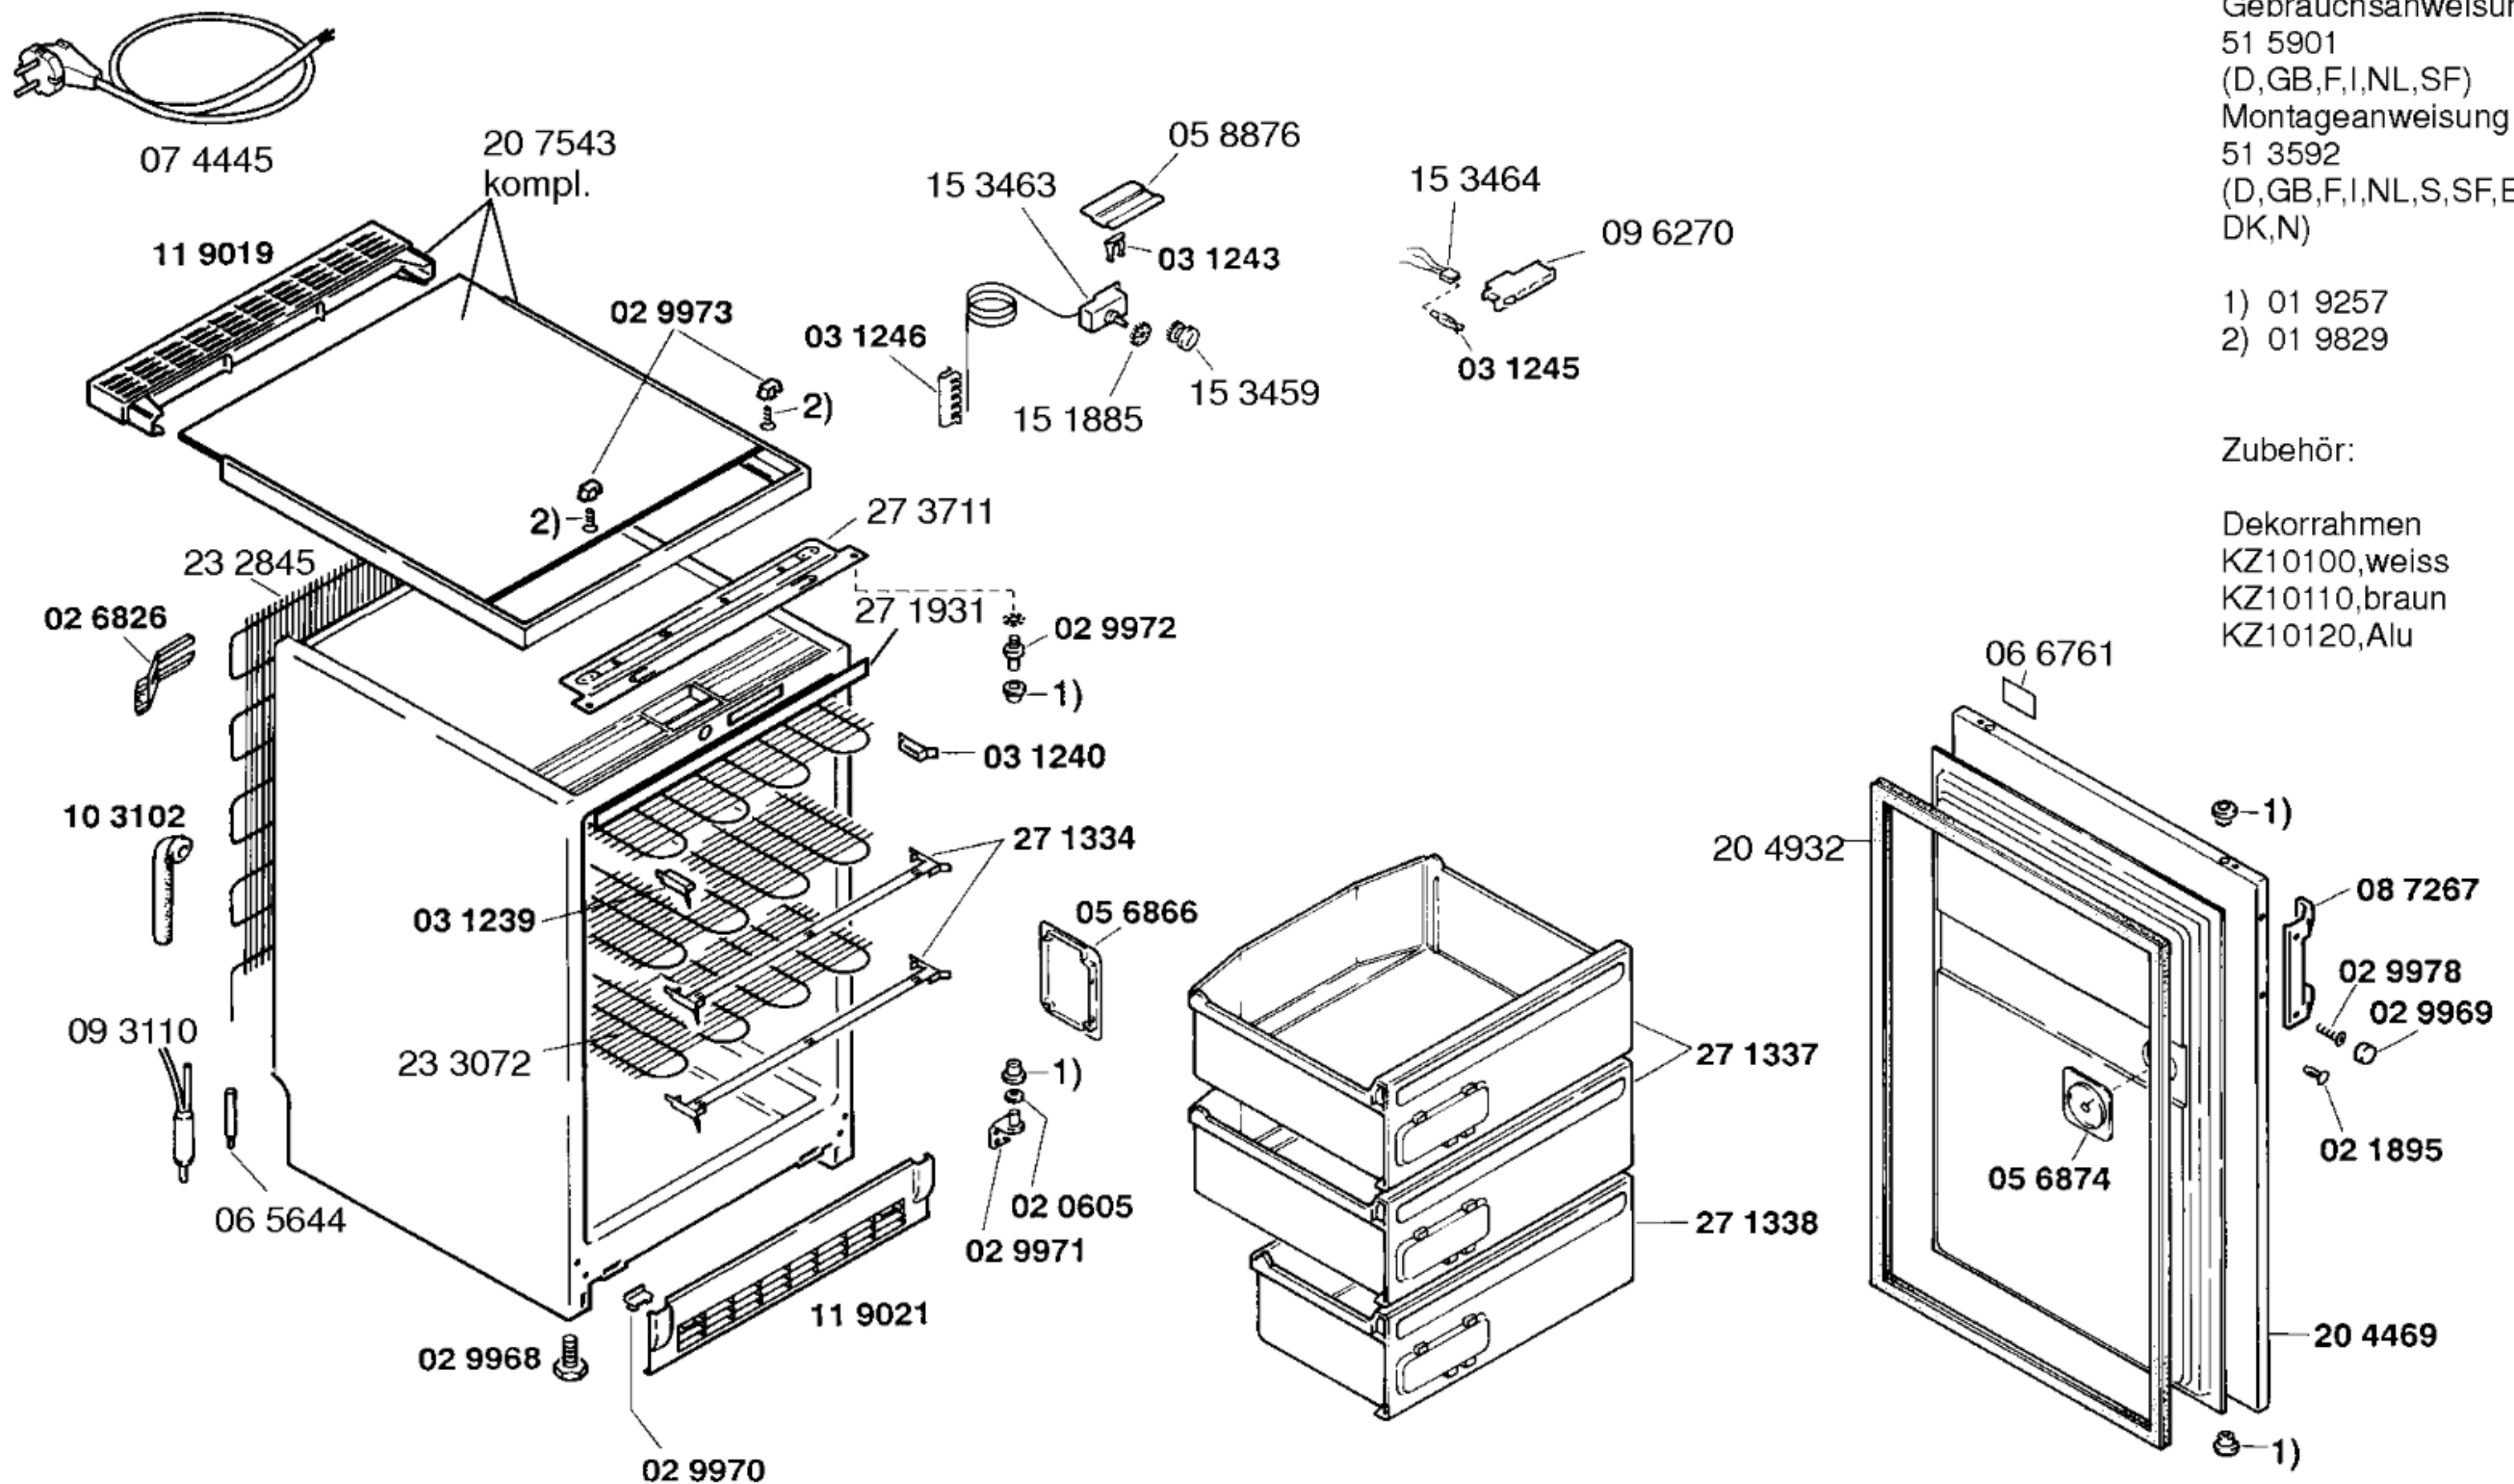


Gebrauchsanweisung
51 5901
(D,GB,F,I,NL,SF)
Montageanweisung
51 3592
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

1) 01 9257
2) 01 9829

Zubehör:

Dekorrahmen
KZ10100, weiss
KZ10110, braun
KZ10120, Alu

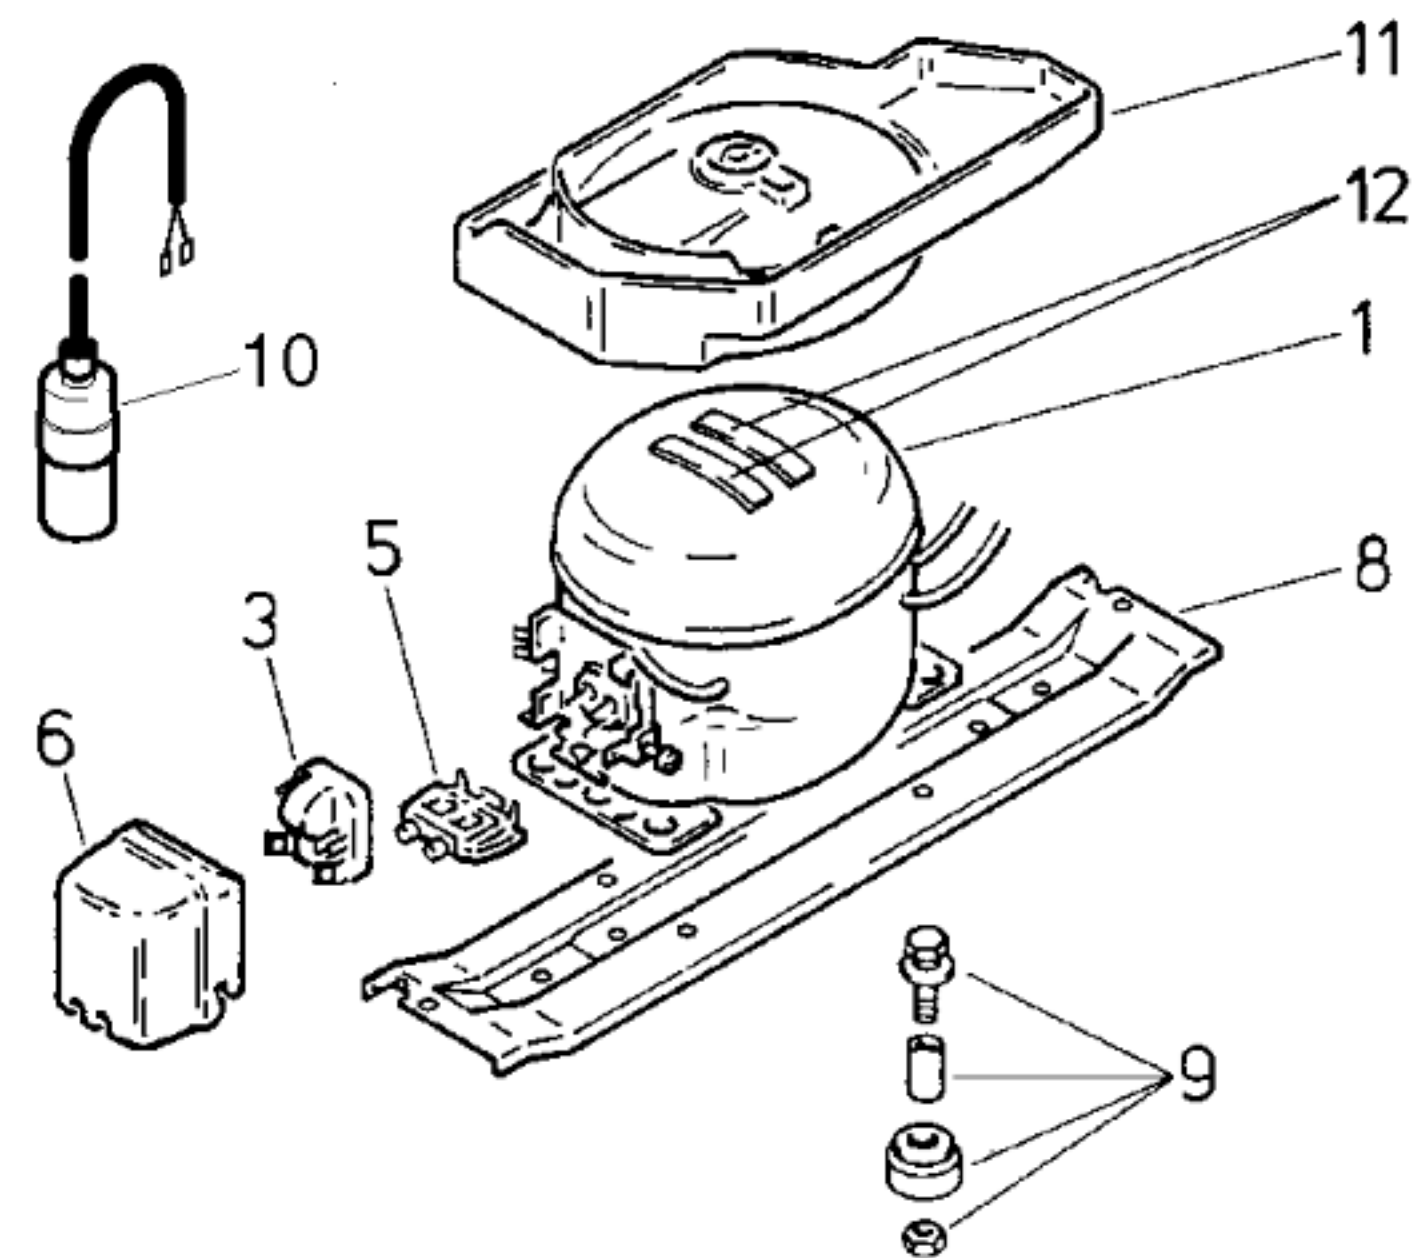

Pos.	Matsushita		
	SD 65 E		
1	14 1316		
2			
3	15 3306		
4			
5	15 3806		
6	15 3303		
7			
8	27 0833		
9			
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Matsushita		
Typ/Type	SD 65 E		
Förderleistung/Delivery/Débit	l/h		
Anlaufstrom/Starting current/Cour de démarrage	A		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω		
	Hi/aux Ω		
Temp.-Regler/Thermostat	Danfoss		
Typ/Type	BE 002		
Reglerstellung/Position	kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$		
Valeurs de commutation	„aus“		
(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge	R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée	W	78	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild