




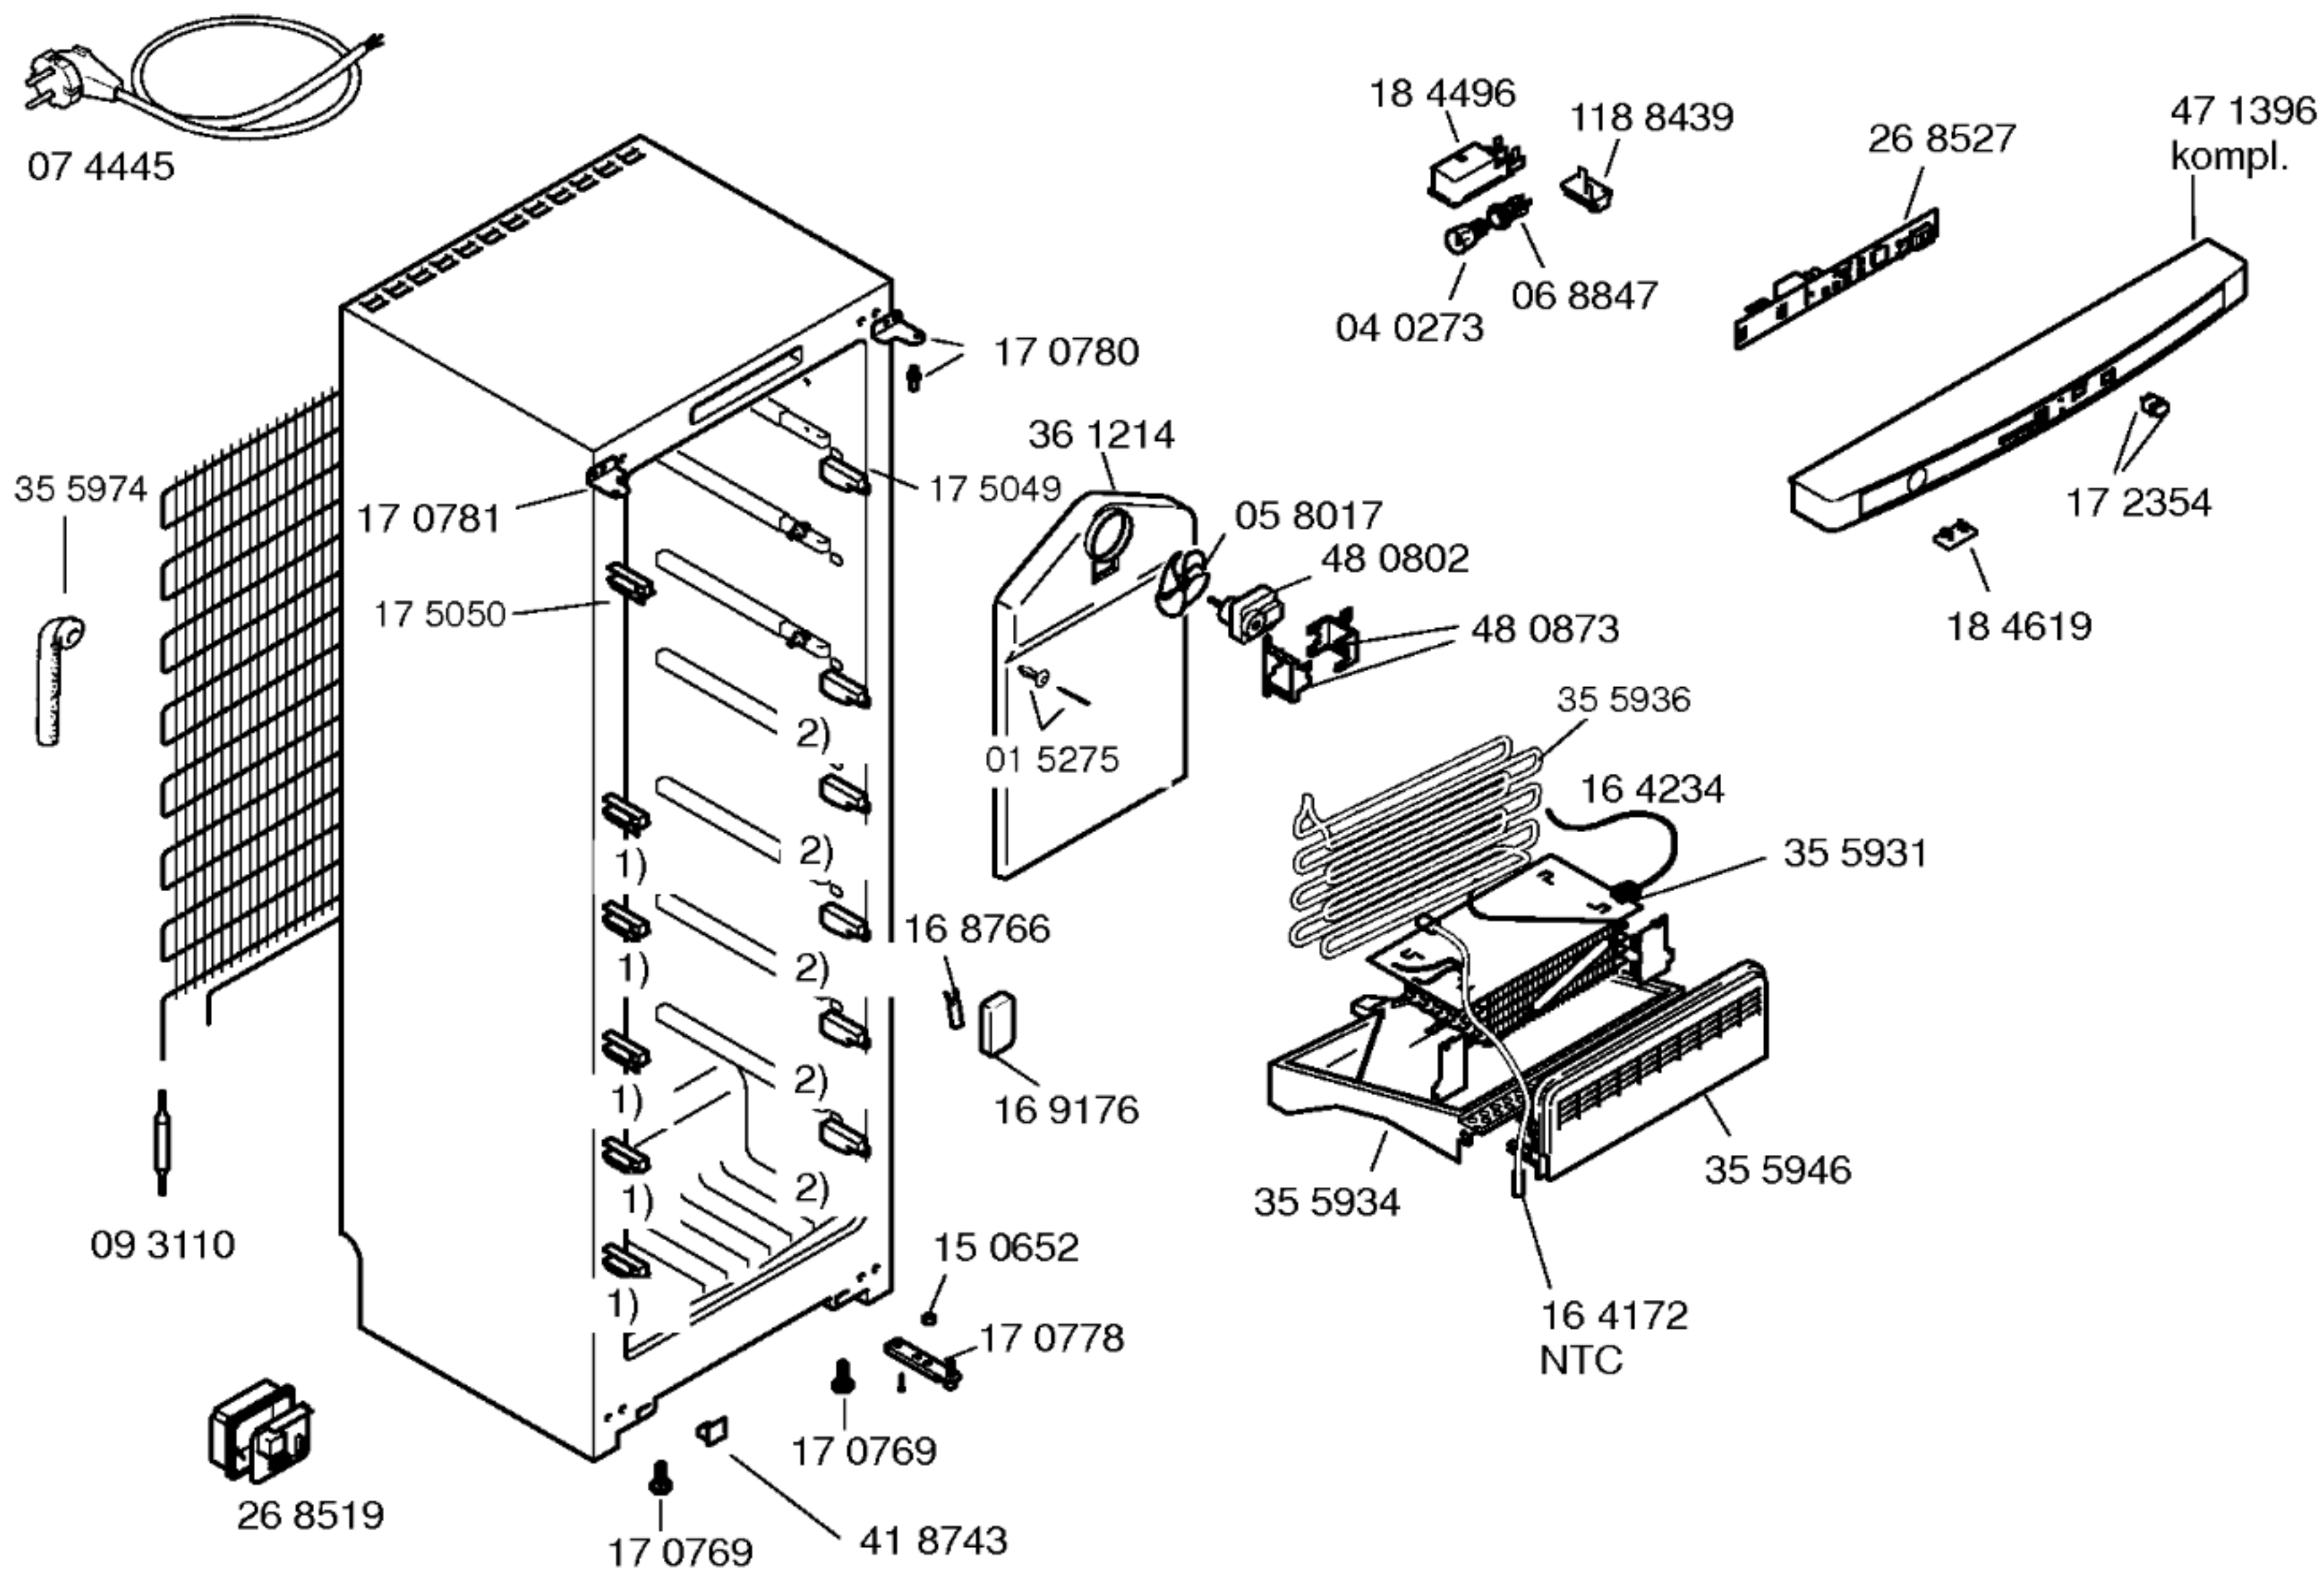



Gebrauchsanweisung
58 7842
(de,en,fr,it,nl)
Montageanleitung
58 0241
Beistellsatz
26 5629

Side by Side
Beistellsatz zu KSR/KSK
48 1044

Gefrierraumteiler
35 3678

1) 17 1455
2) 17 1454

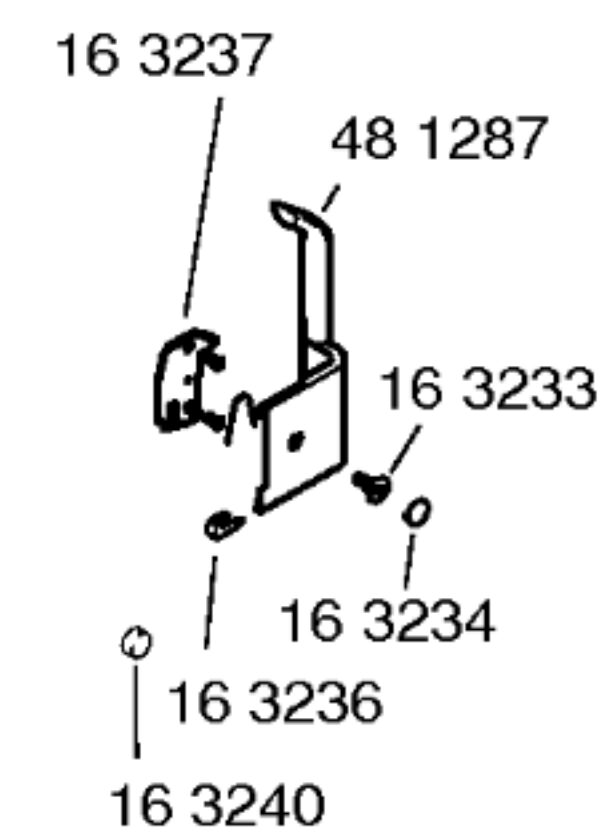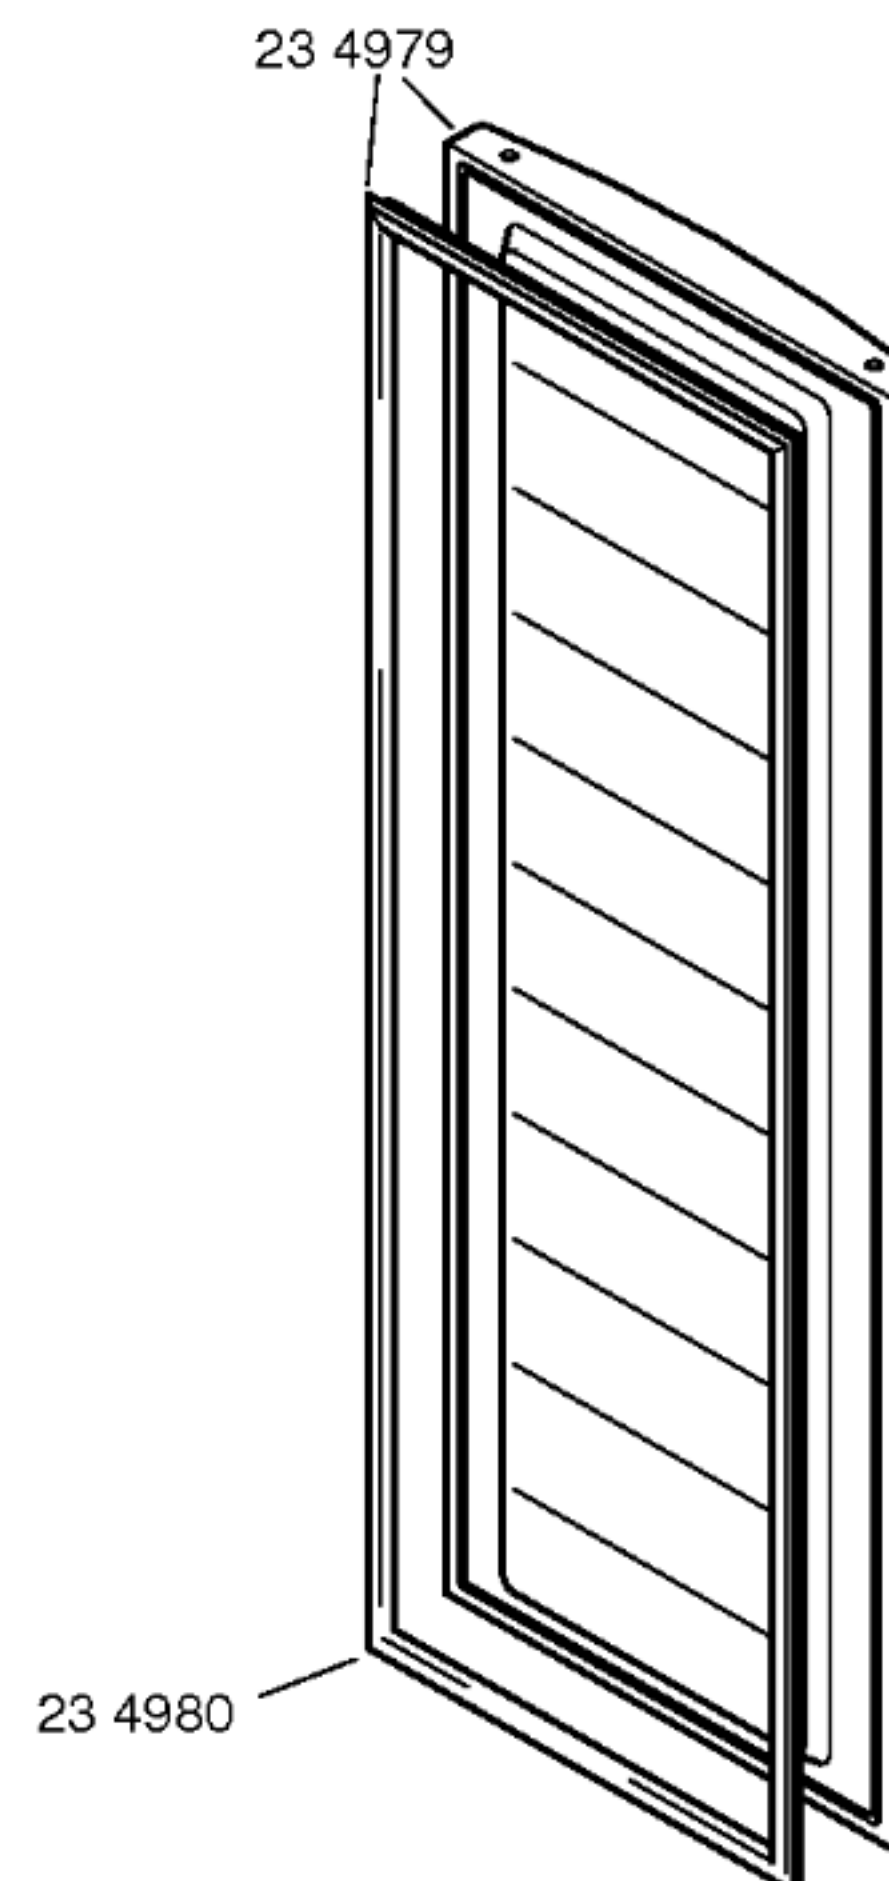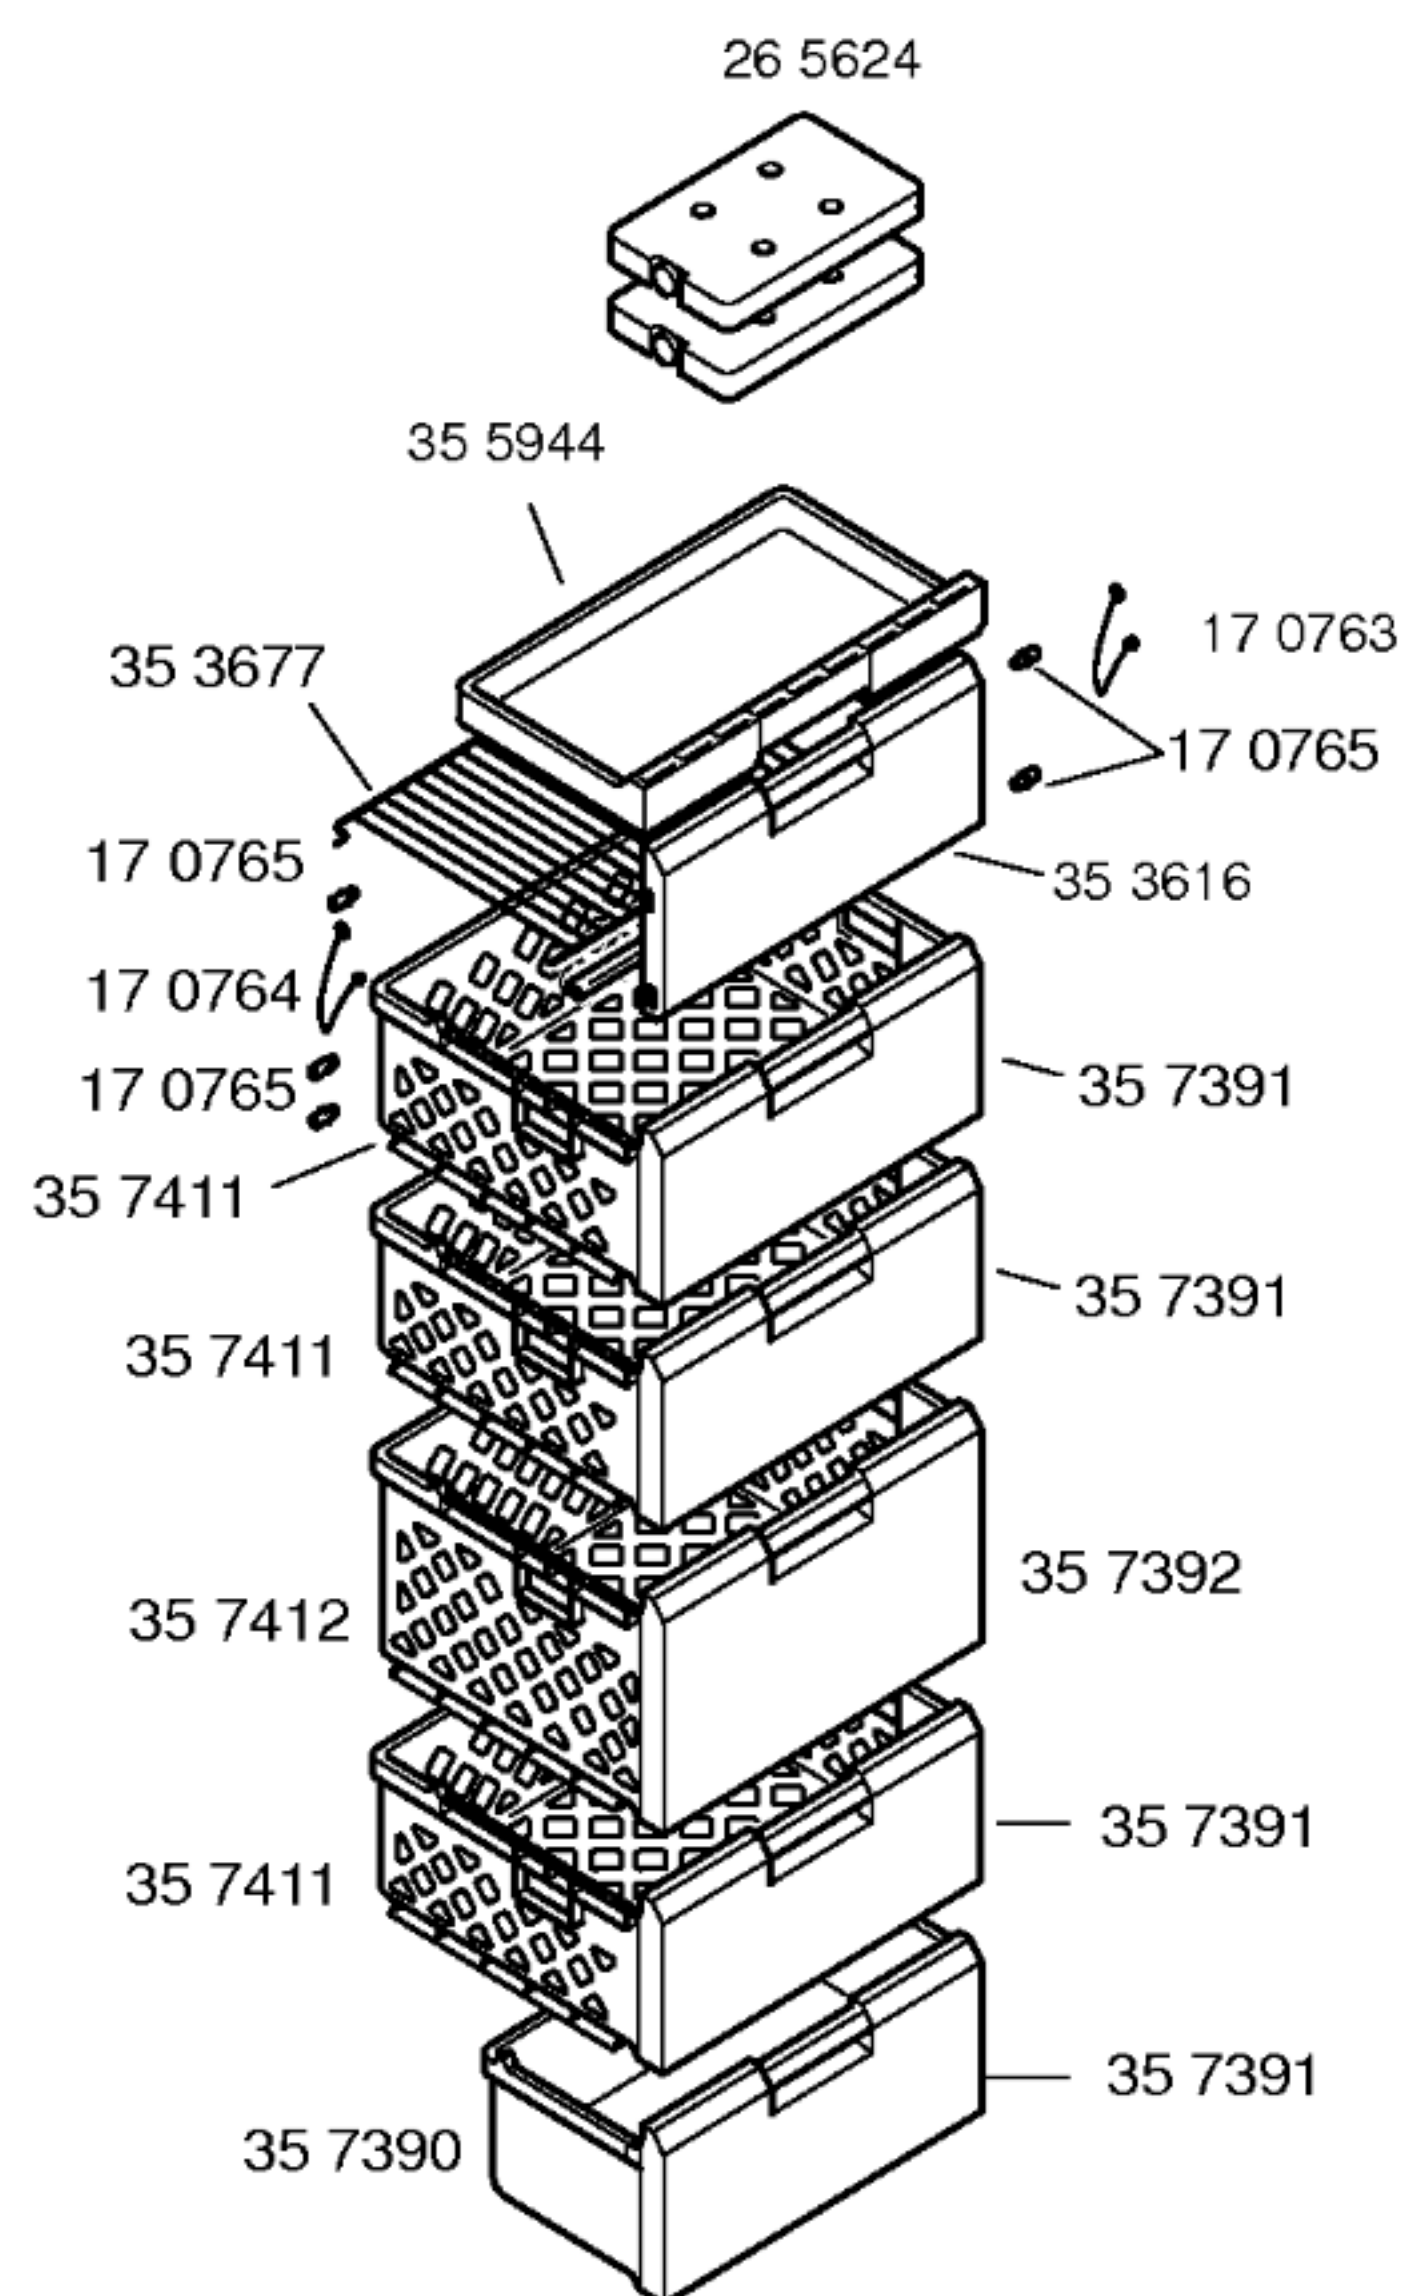

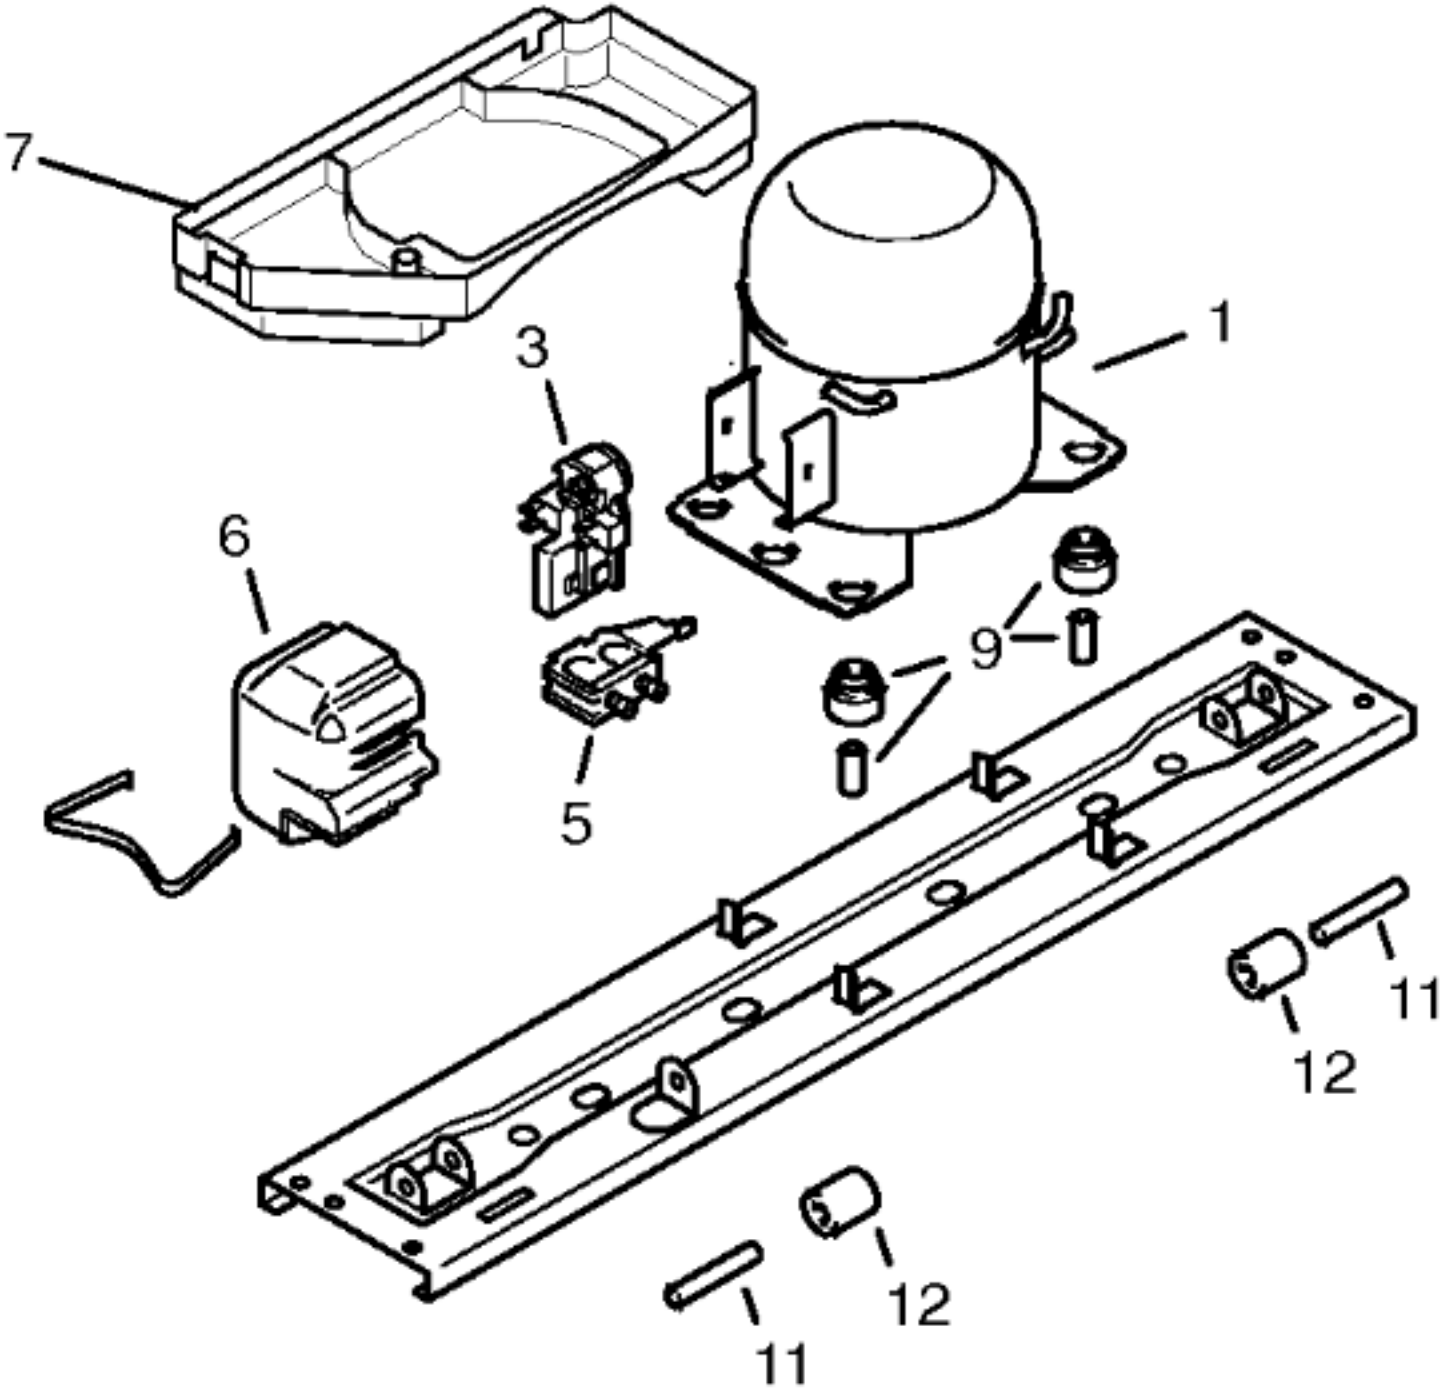

Pos.	V01,V02		
	Matsushita		
	DC 125 E		
1	14 2131		
2			
3	17 2967		
4			
5	16 2549		
6	16 6782		
7	26 9945		
8			
9	05 0166		
10			
11	01 9017		
12	01 1916		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur			Matsushita			
Typ/Type			DC 125 E			
Förderleistung/Delivery/Débit			l/h	2246		
Anlaufstrom/Starting current/Cour de démarrage			A	9,2		
Widerstand/Resistance/Résistance			Ha/main/prin	Ω	12,1	
			Hi/aux	Ω	13,8	
Temp.–Regler/Thermostat			Elektronisch			
Typ/Type			EIN AUS			
Regelstellung/Position			–15 –16			
Schaltwerte/Switching values			"warm"	–19 –20		
Valeurs de commutation			"kalt"	–23 –24		
			"alarm"	–9 –14		
Füllmenge/Fill.quantity/Charge			R600a	*	*	
Anschlußwert/Conn.load/Puiss. connectée			W	120		
Heizung/Heater/Chauffage			Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance			Ω	288	240	
Leistung/Power/Puissance			W	200	24	
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance			Ω	560		
Raumtemperaturfühler			C	K	C	k
			+10	9,9	–18	43,3
			+ 5	12,7	–22	54,6
			+ 0	16,3	–26	69,4
Widerstand NTC–Fühler			°C	kΩ	°C	kΩ
			–1	17,3	–15	36,5
			–9	26,2	–16	38,8
			–14	34,5	–19	45,9
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance			Ω			
Spannung/Voltage/Tension			V			

* siehe Typenschild