


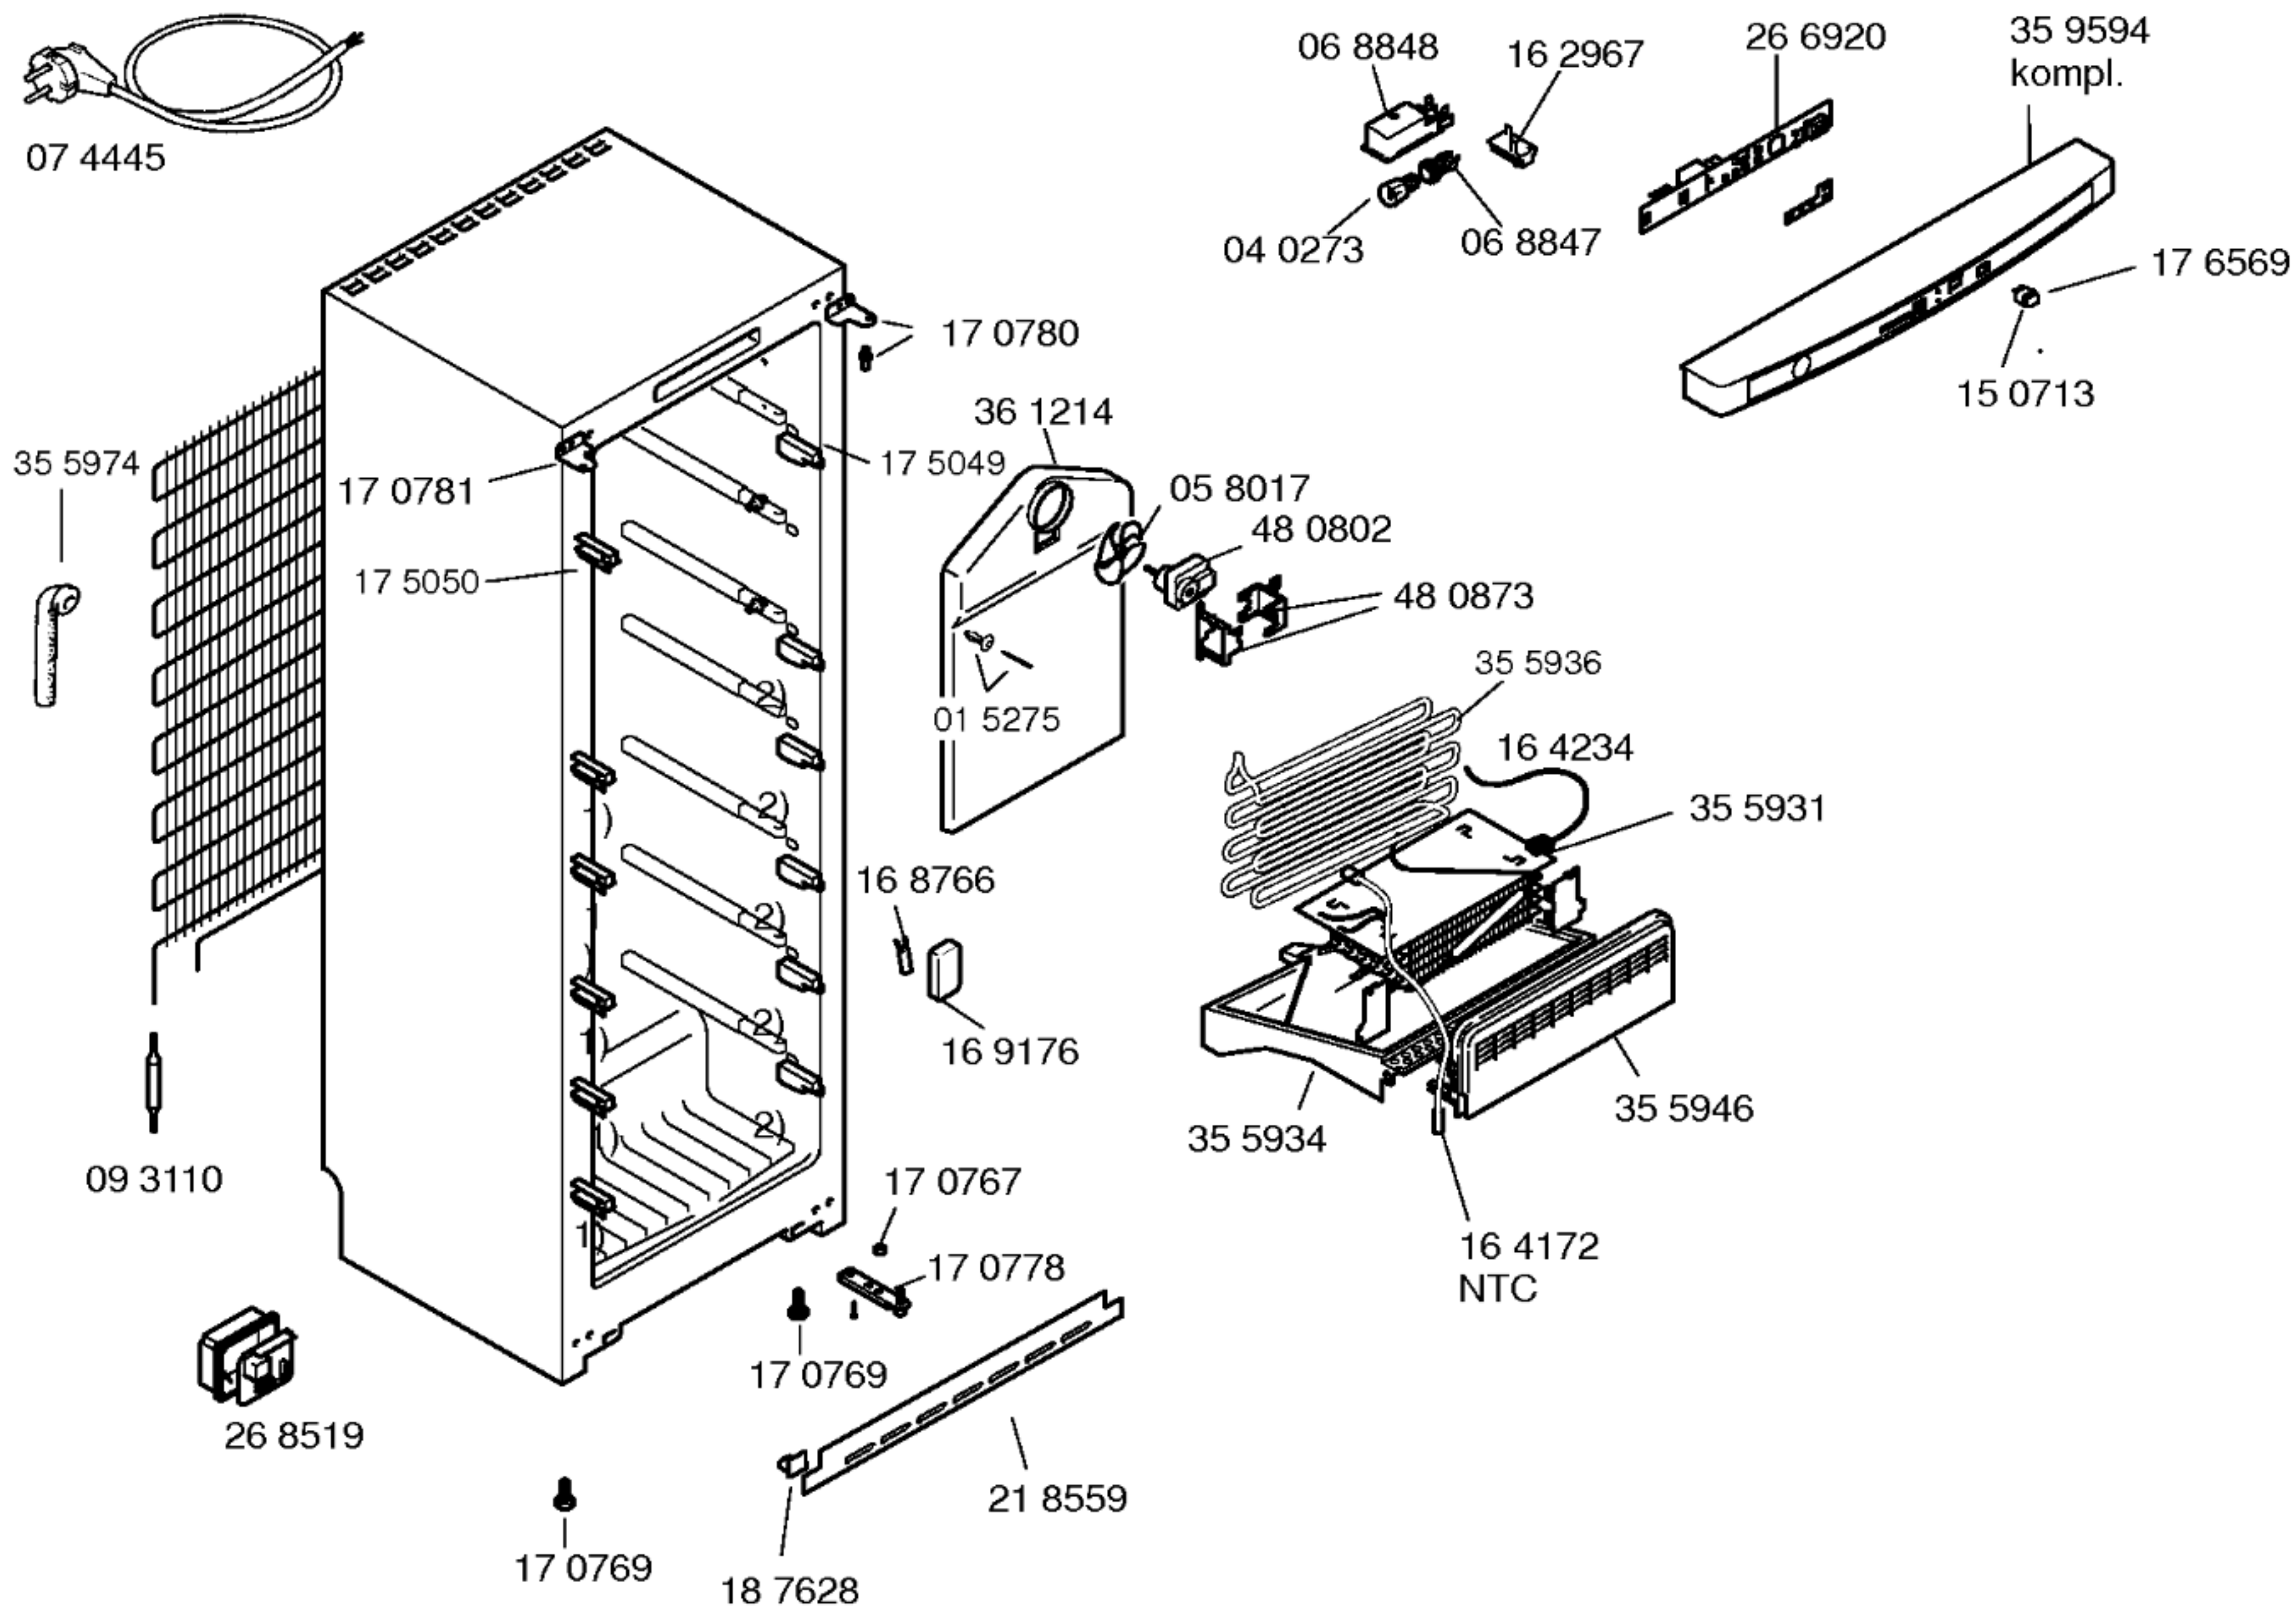




Gebrauchsanweisung
52 3813
(D,GB,F,I,NL,E,P)
Montageanleitung
52 2772
(D,GB,F,I,NL,DK,N
SF,S,E,P,TR,GR)


Beistellsatz
26 5629

Side by Side
Beistellsatz zu KSR/KSK
48 1044

Gefrierraumteiler
35 3678

1) 17 1455
2) 17 1454

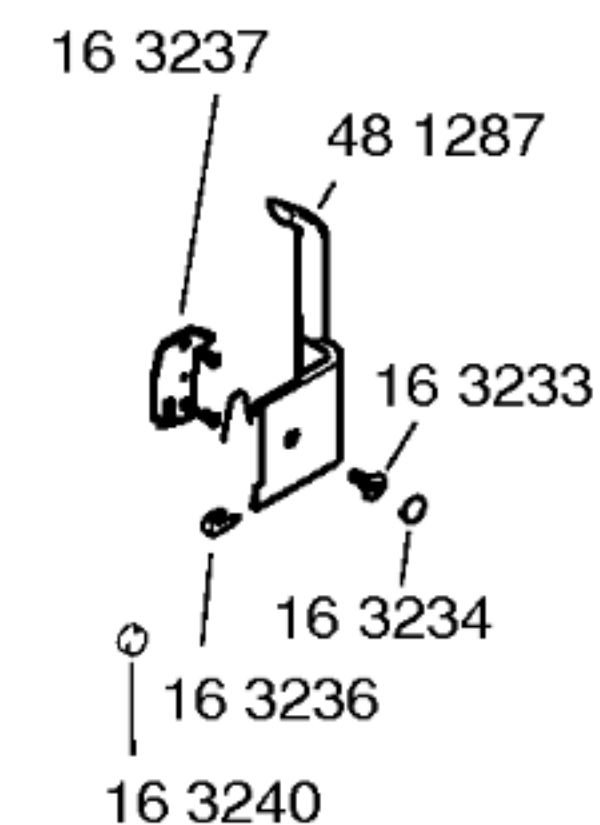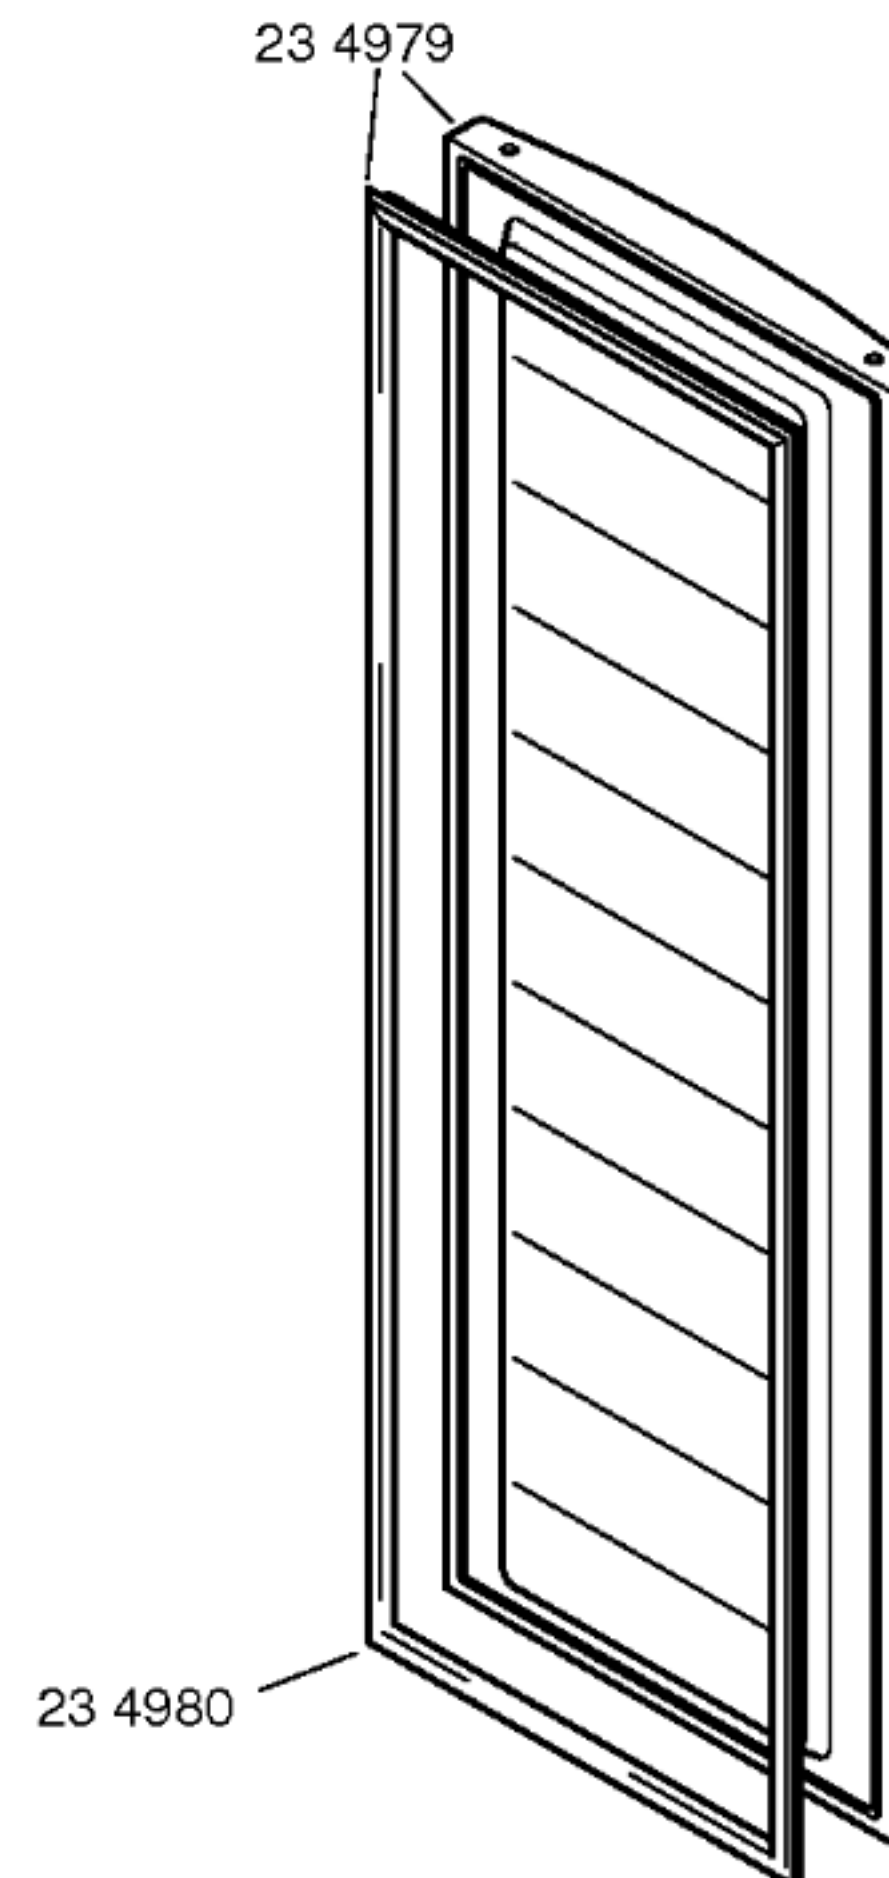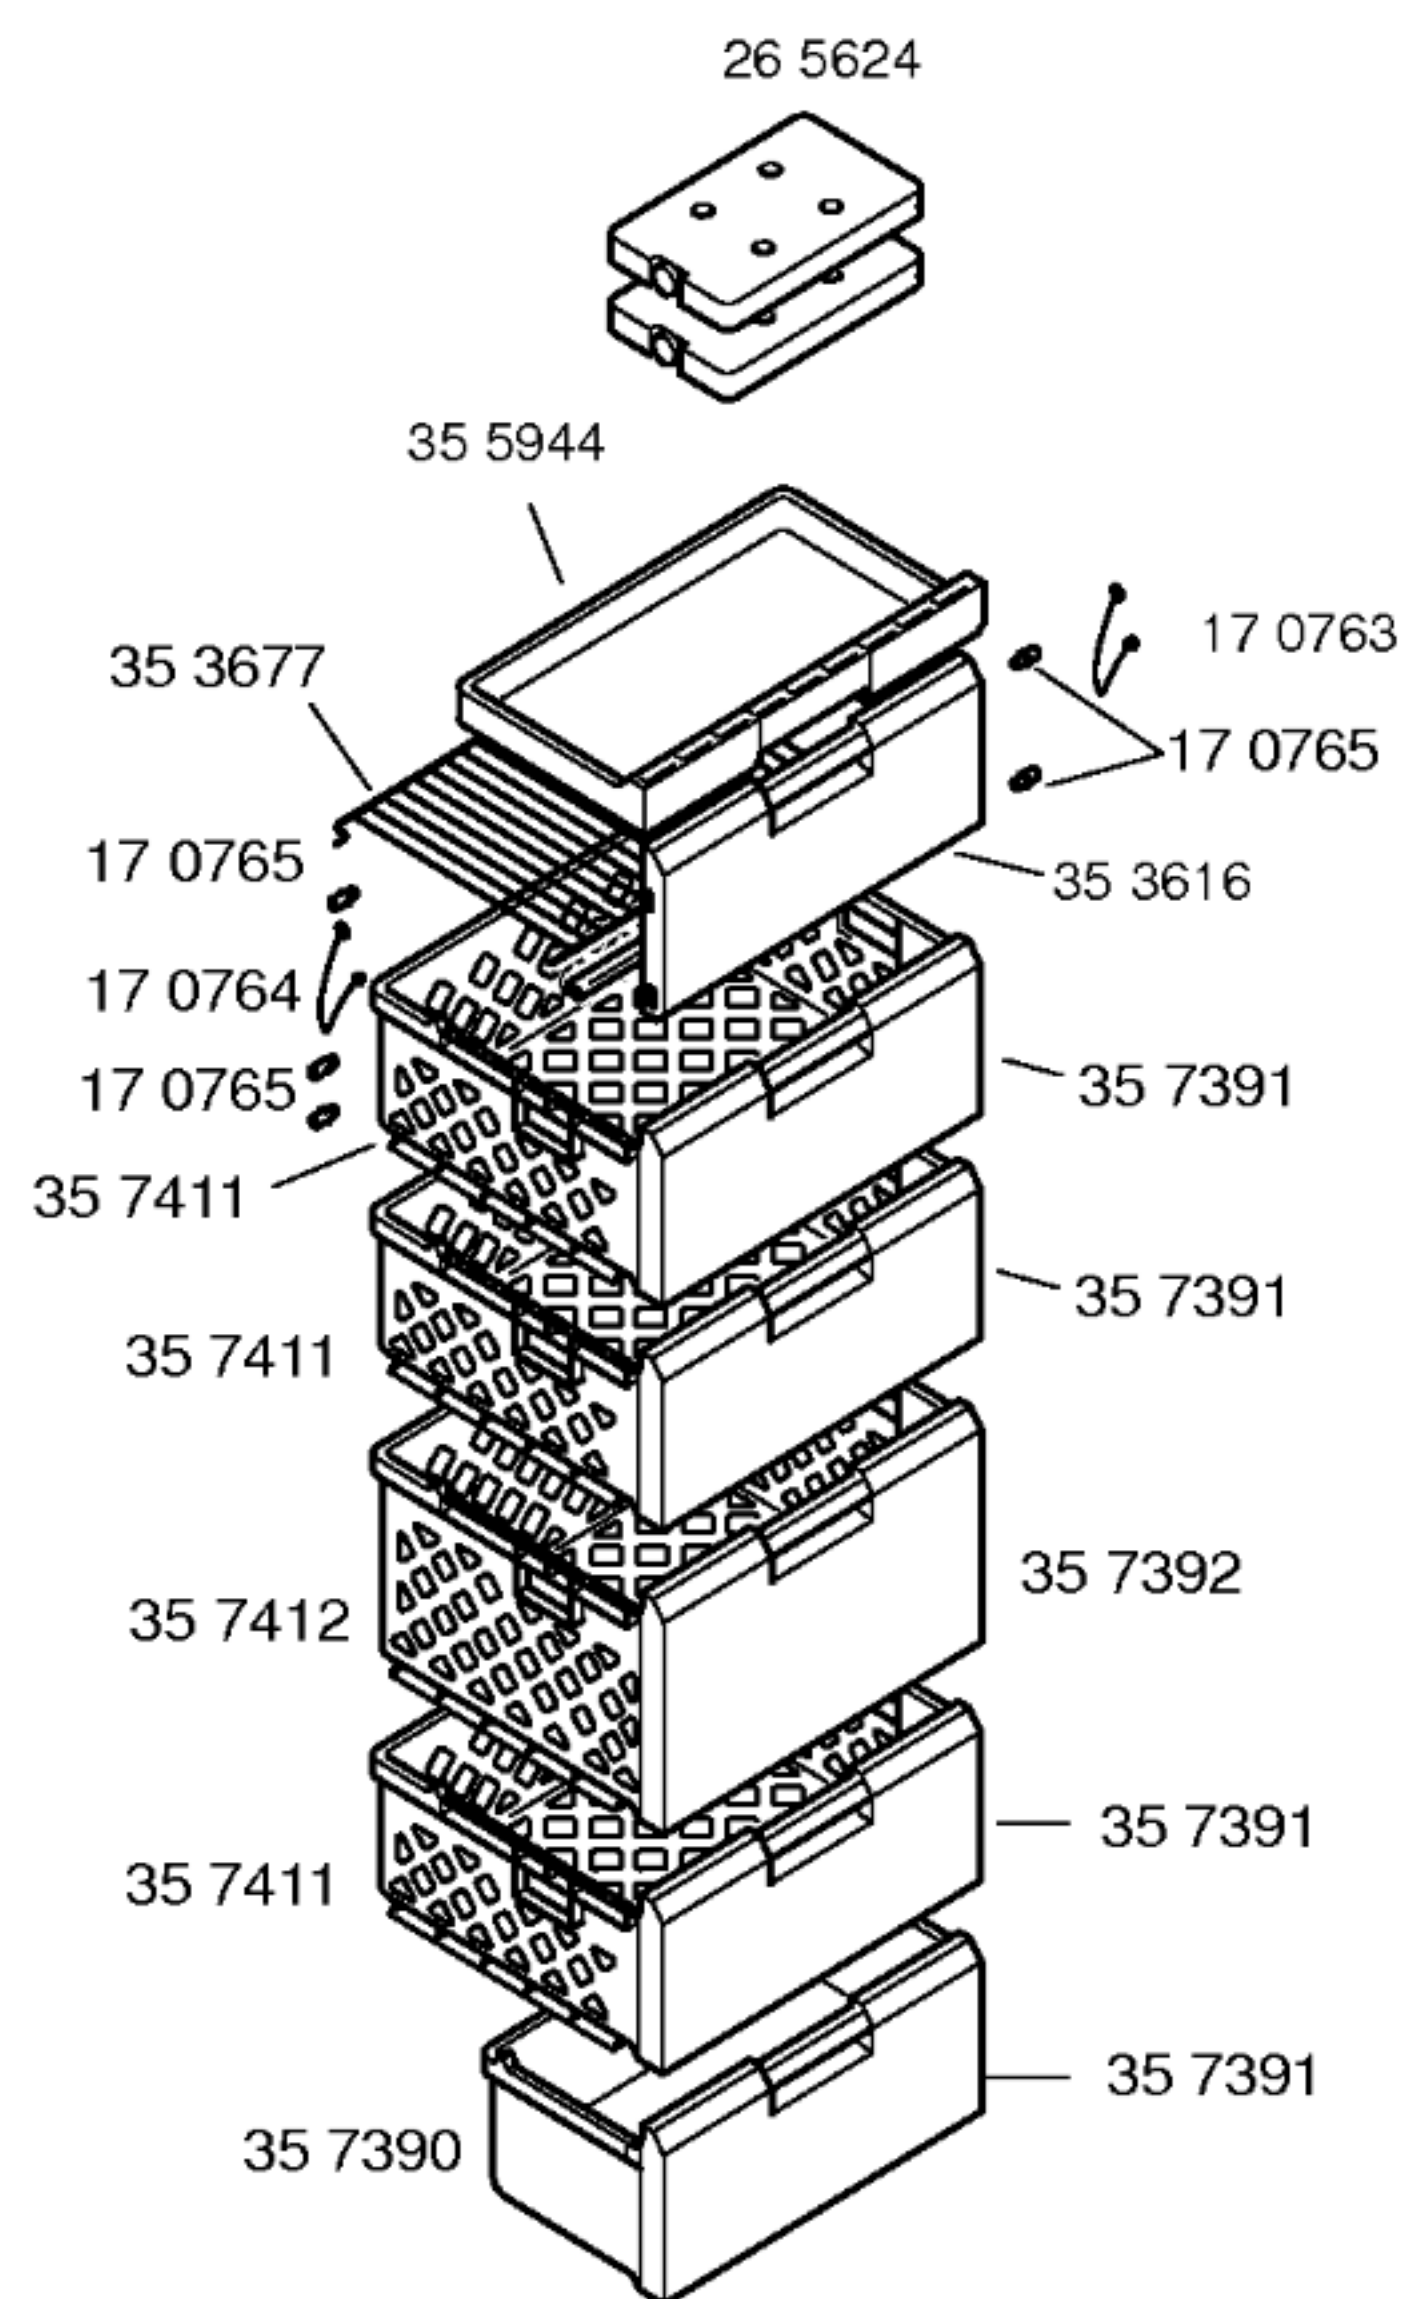

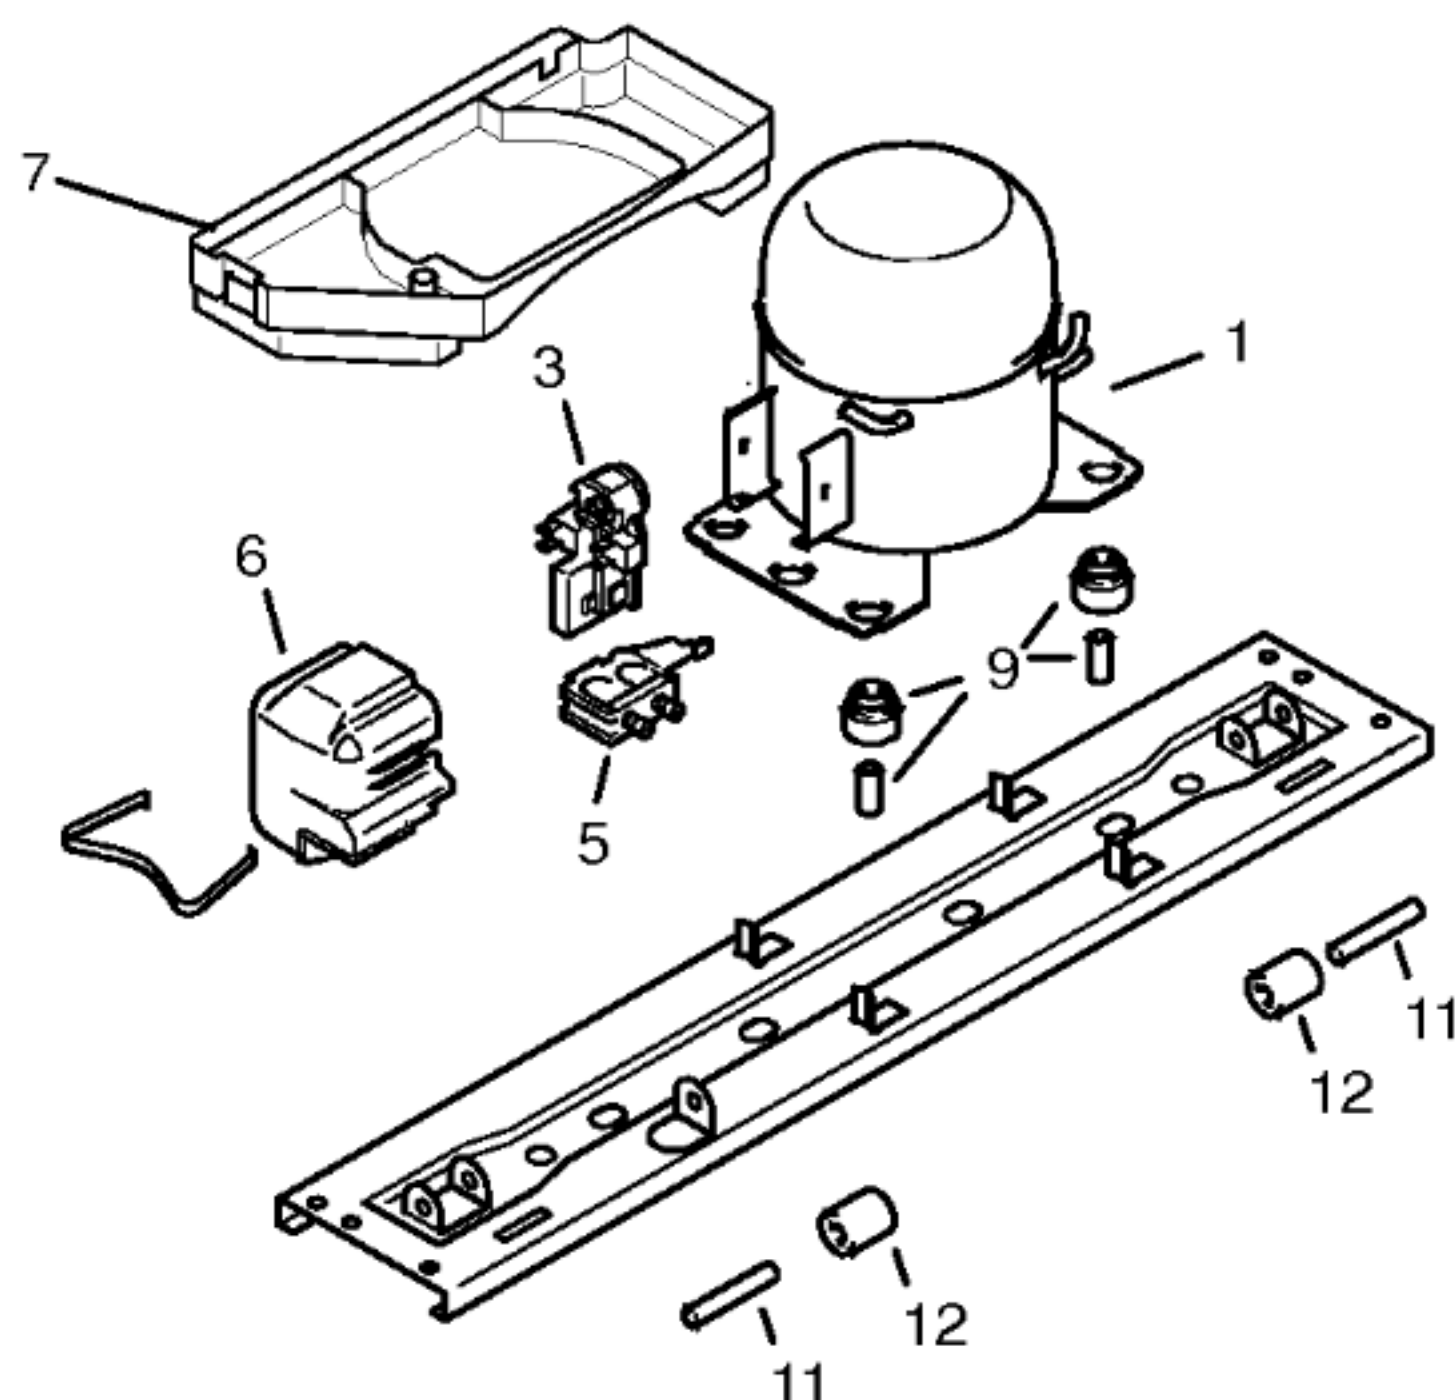

	V01	V02	
	Danfoss	Matsushita	
Pos.	NLY13K	DC 125 E	
1	14 1747	14 2131	
2			
3	15 1055	17 2967	
4			
5	15 0760	16 2549	
6	15 1072	16 6782	
7	09 6212	26 9945	
8			
9	05 0166	05 0166	
10			
11	01 9017	01 9017	
12	01 9016	01 1916	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Danfoss		Matsushita	
Typ/Type		NLY13K		DC 125 E	
Förderleistung/Delivery/Débit		l/h		2394	
Anlaufstrom/Starting current/Cour de démarrage		A		11,3	
Widerstand/Resistance/Résistance Ha/main/prin		Ω		11,0	
Hi/aux		Ω		9,0	
Temp.-Regler/Thermostat		Elektronisch			
Typ/Type		EIN AUS			
Regelstellung/Position		-15 -16			
Schaltwerte/Switching values "warm"		-19 -20			
Valeurs de commutation "kalt"		-23 -24			
		-9 -14			
Füllmenge/Fill quantity/Charge R600a		*		*	
Anschlußwert/Conn load/Puiss. connectée		W		133 120	
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance		Ω		288 240	
Leistung/Power/Puissance		W		200 24	
Ventilator/Blower/Ventilateur		Ω		560	
Widerstand/Resistance/Résistance		Ω			
Raumtemperaturfühler		C K		C k	
		+10 9,9		-18 43,3	
		+5 12,7		-22 54,6	
		+0 16,3		-26 69,4	
Widerstand NTC-Fühler		$^{\circ}\text{C}$ k Ω		$^{\circ}\text{C}$ k Ω	
		-1 17,3		-15 36,5	
		-9 26,2		-16 38,8	
		-14 34,5		-19 45,9	
		-20 48,6		-23 58,1	
		-24 61,6			
Magnetventil/Magnetic valve/Electrovanne		Ω			
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

* siehe Typenschild