


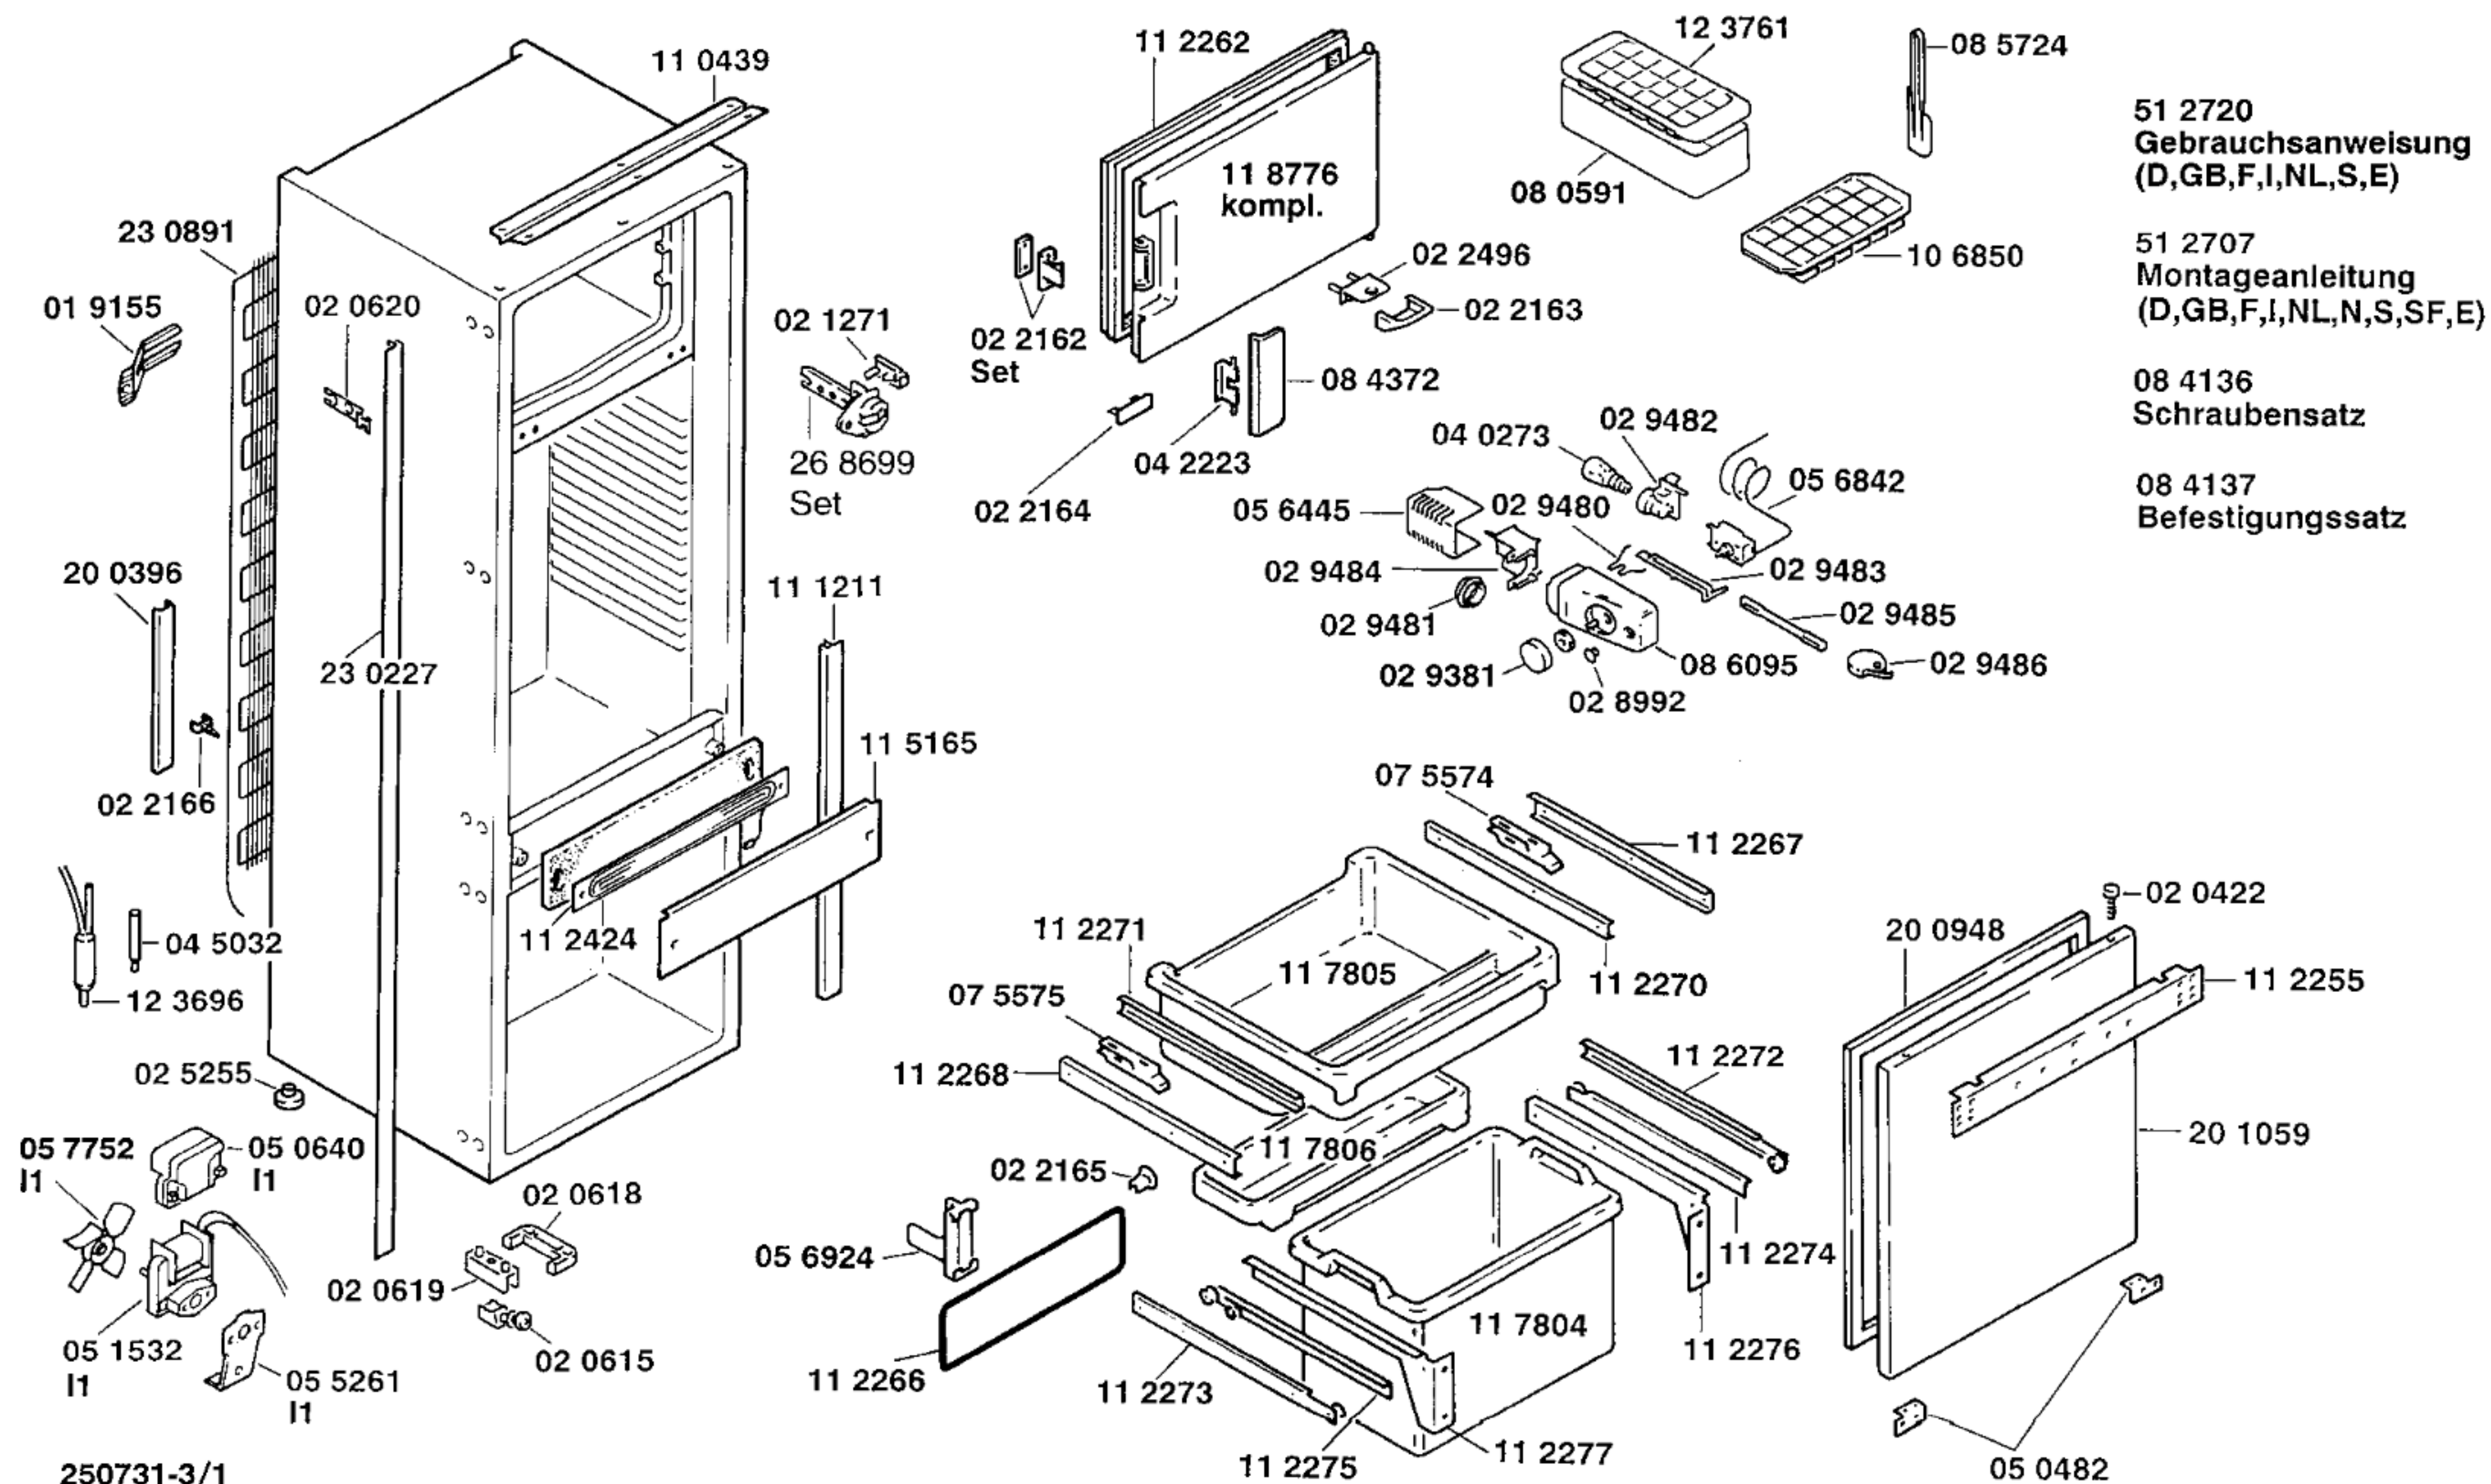
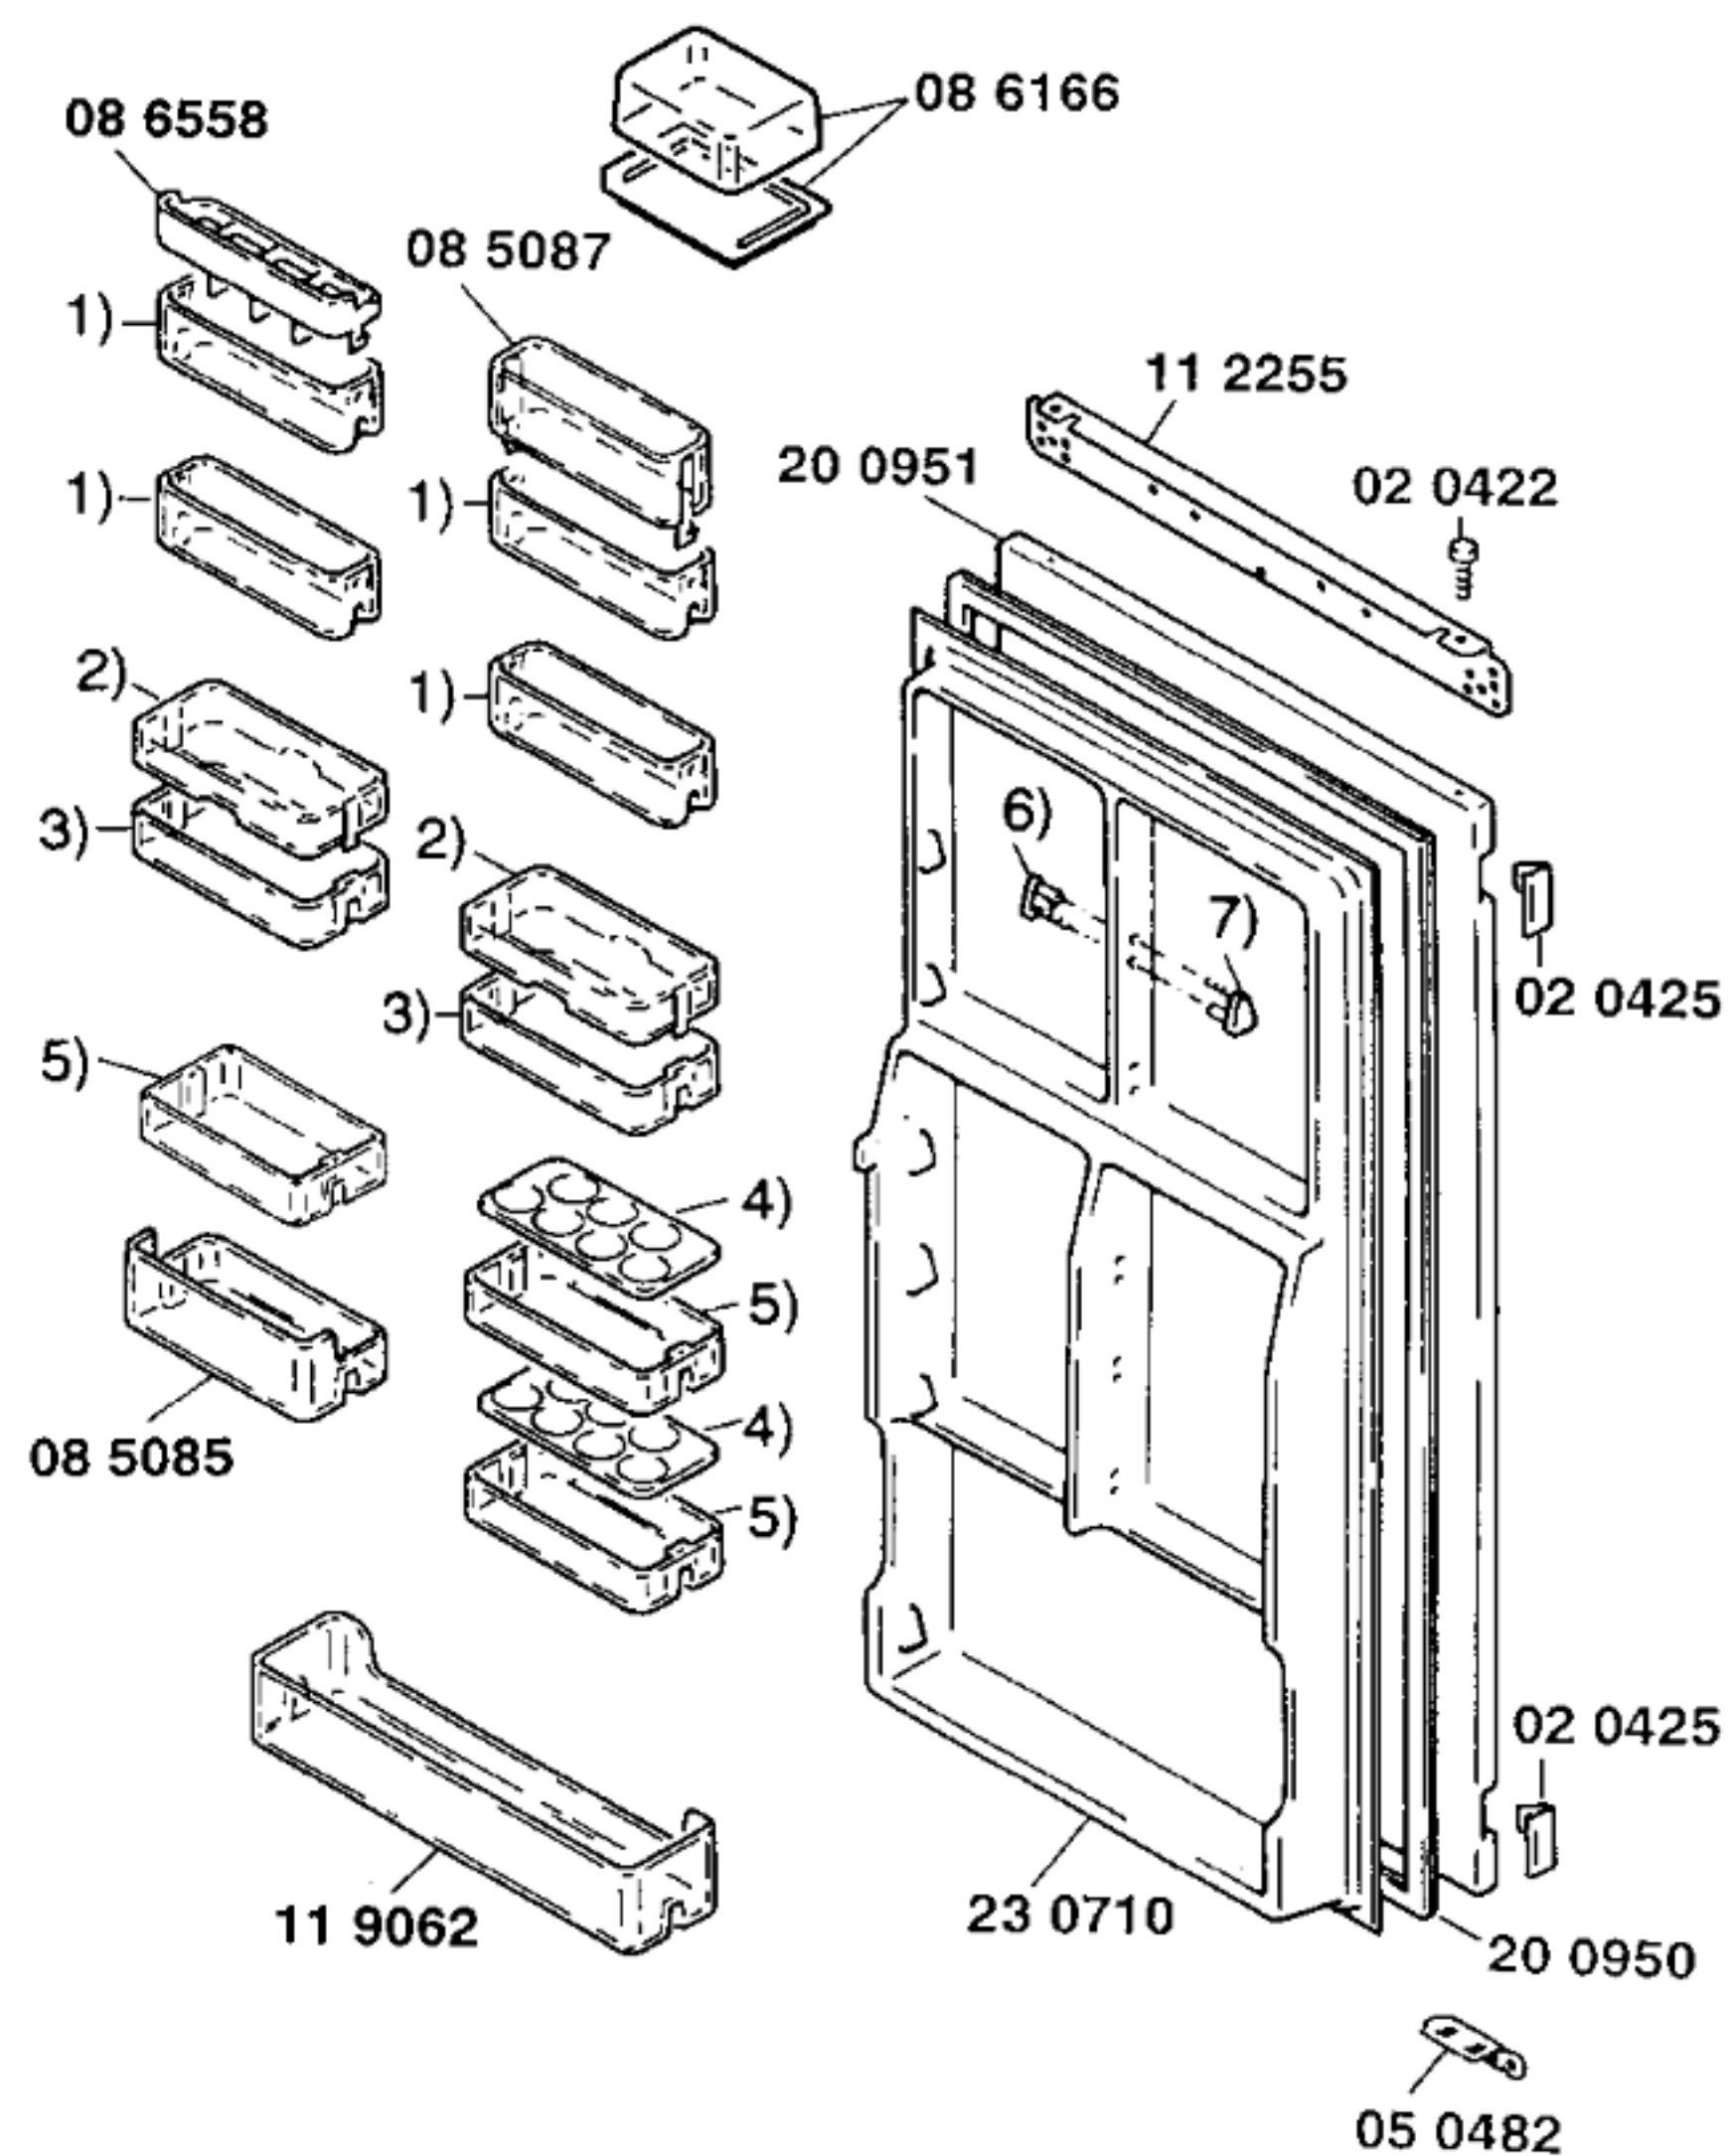


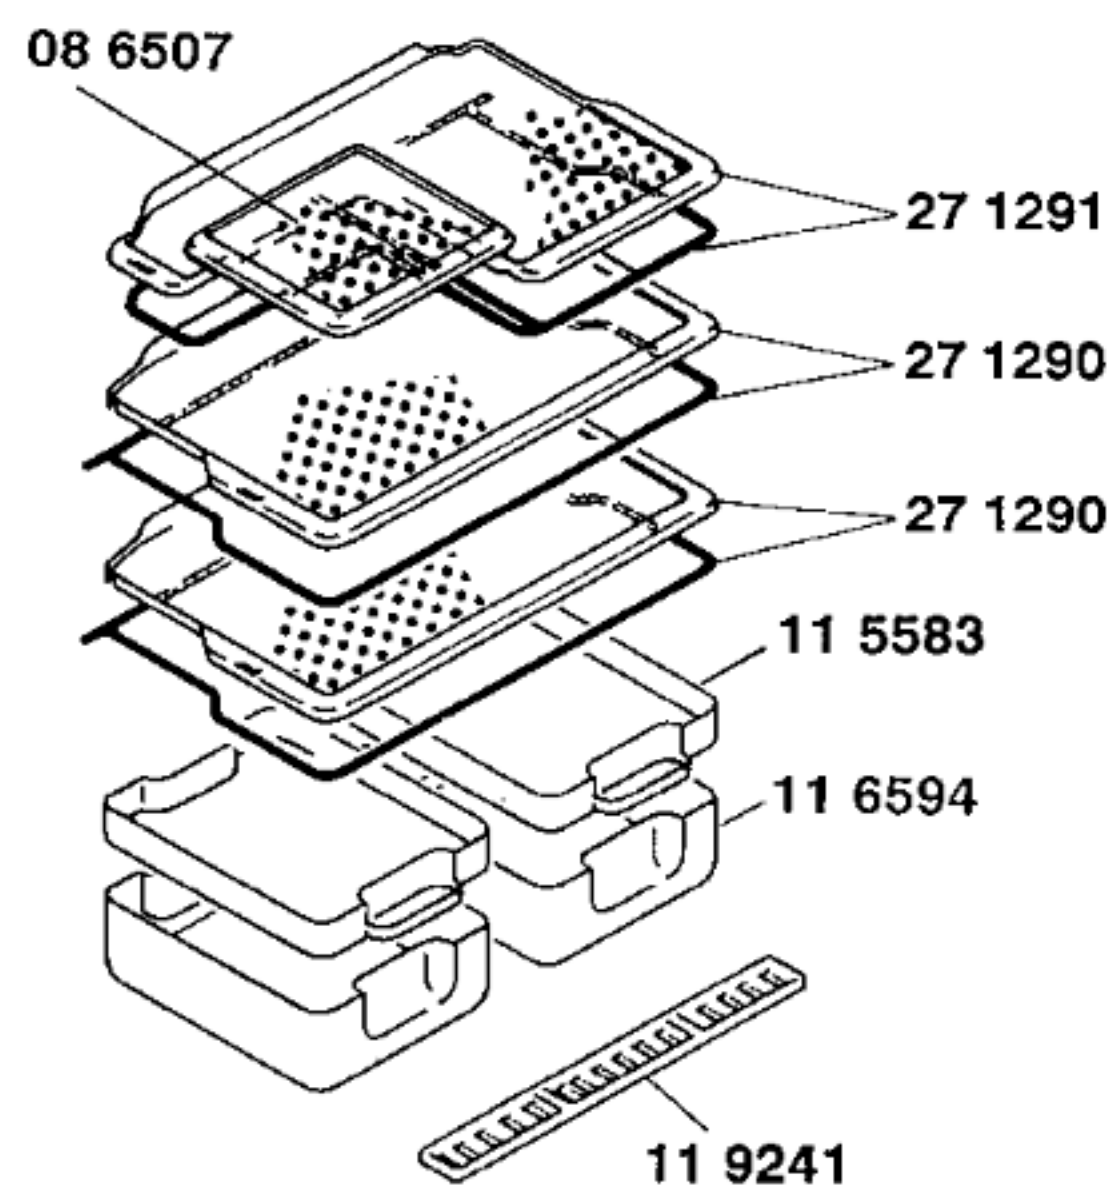

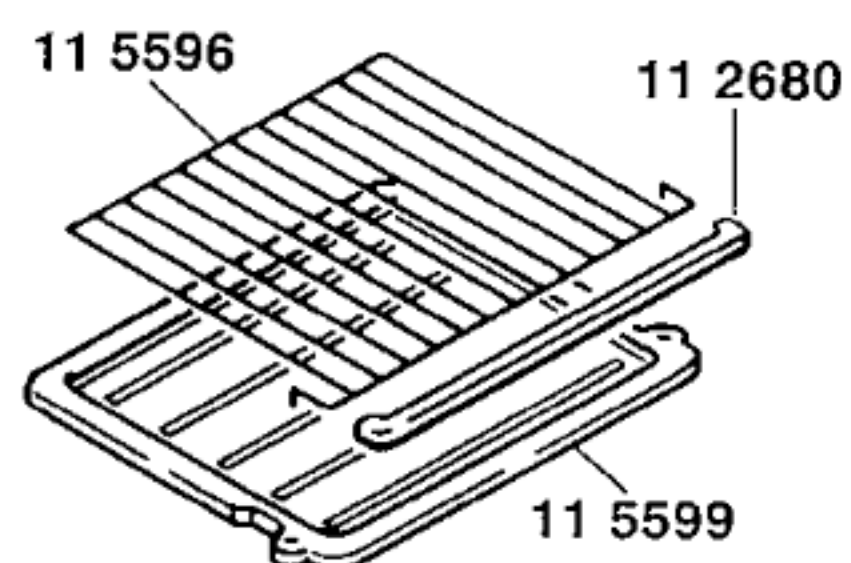

- 1) 08 5089
- 2) 08 5086
- 3) 08 5084
- 4) 08 4592
- 5) 08 5084
- 6) 02 2437
- 7) 02 6566

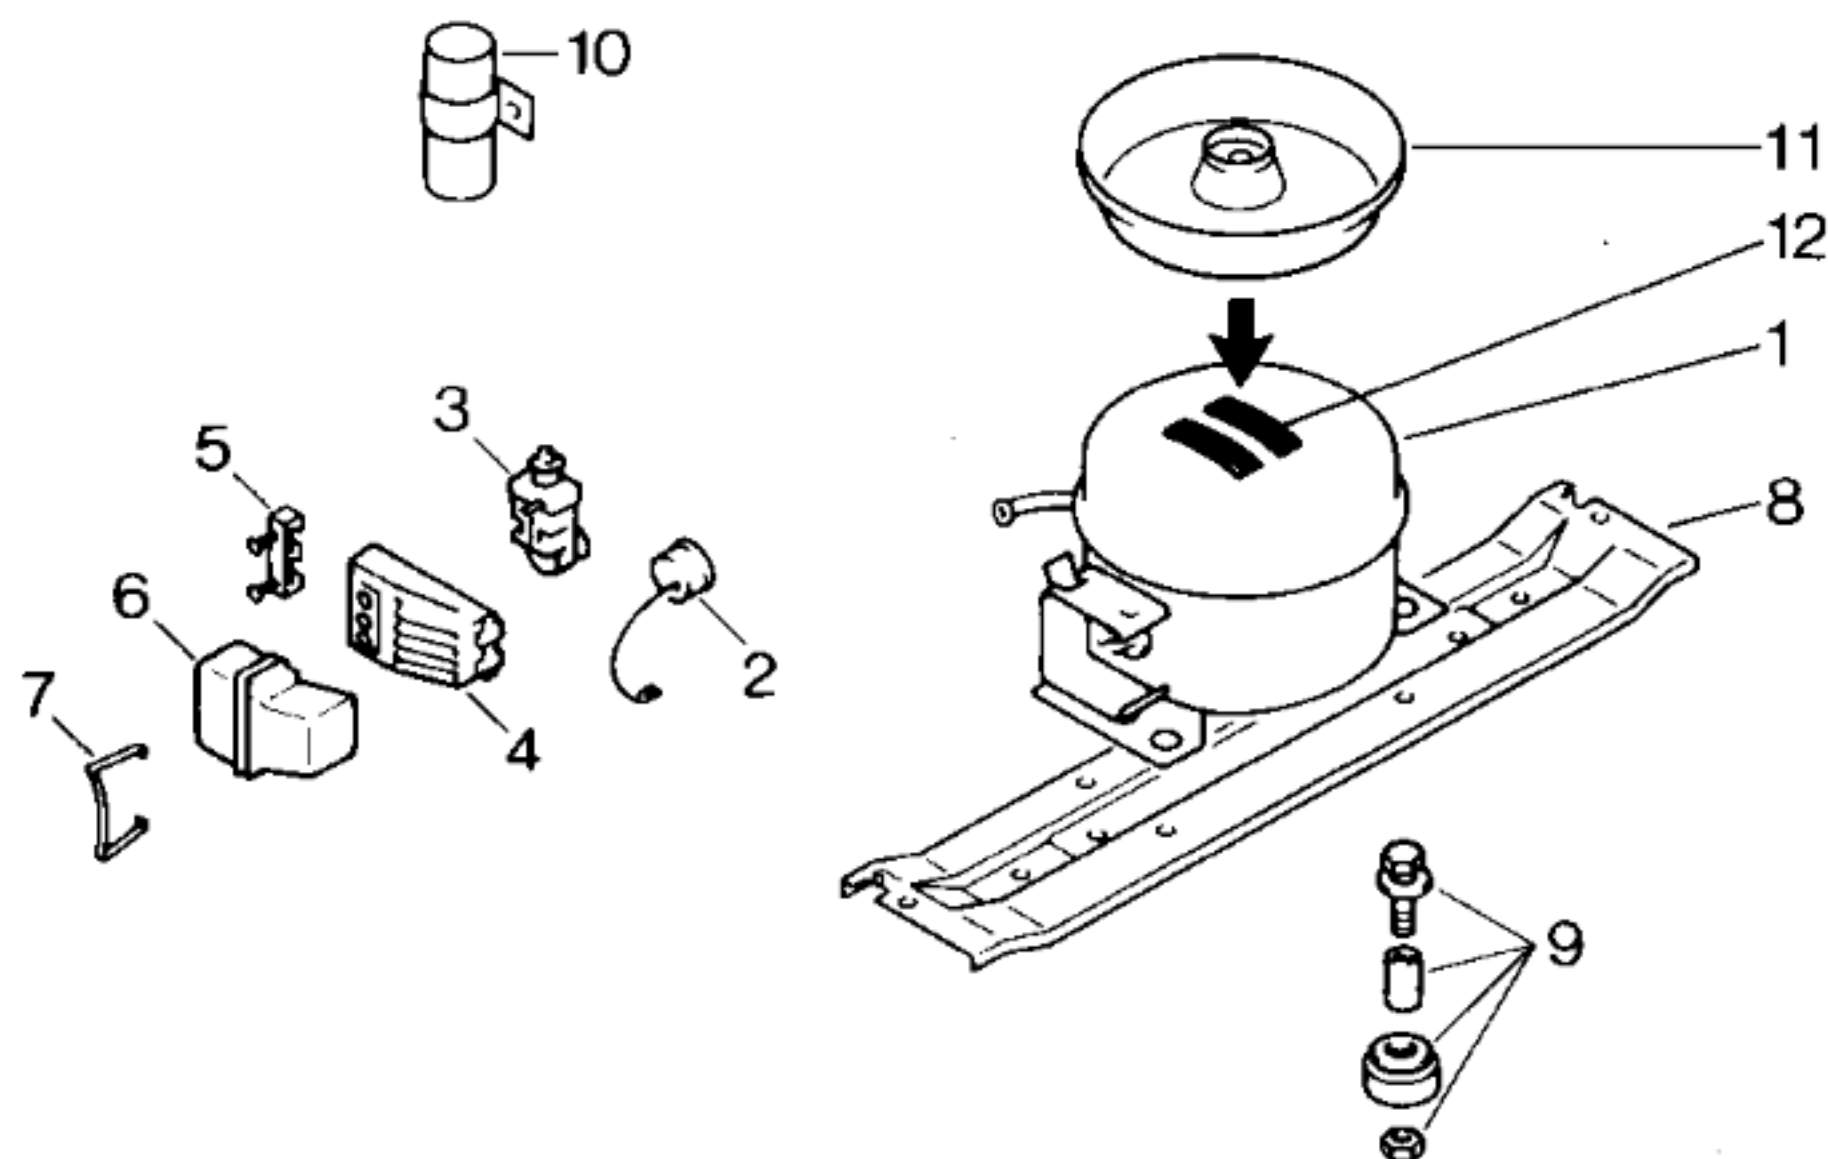

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Matsushita	
Typ/Type		BY 1116 A	D116LRAA	
Förderleistung/Delivery/Débit		l/h	1450	1184
Anlaufstrom/Starting current/Cour. de démarrage		A	9,9	8,75
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	11,7	12,0
		Hi/aux Ω	37,7	28,7
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		+4,5	+4,5	
Valeurs de commutation		-31,0	-13,5	
		(„abtauen“ od.)	(„alarm“)	
Füllmenge/Fill.quantity/Charge		R12	g	180
Anschlußwert/Conn.load/Puiss. connectée		W	150	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω	8800	
Leistung/Power/Puissance		W	5,5	
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	430 $\pm$ 10%	
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	EU1,CH1,F1,I1	EU2,CH2,F2	
	Aspera	Matsushita	
	BY 1116 A	D116LRAA	
1	14 0405	14 0563	
2	02 6559	05 8506	
3	02 2342		
4	05 1748		
5			
6	05 1746	05 8458	
7	02 2339	02 6731	
8	11 1838	11 1838	
9	05 0166	05 0166	
10			
11	08 5091	08 5182	
12	05 6008	05 6008	