



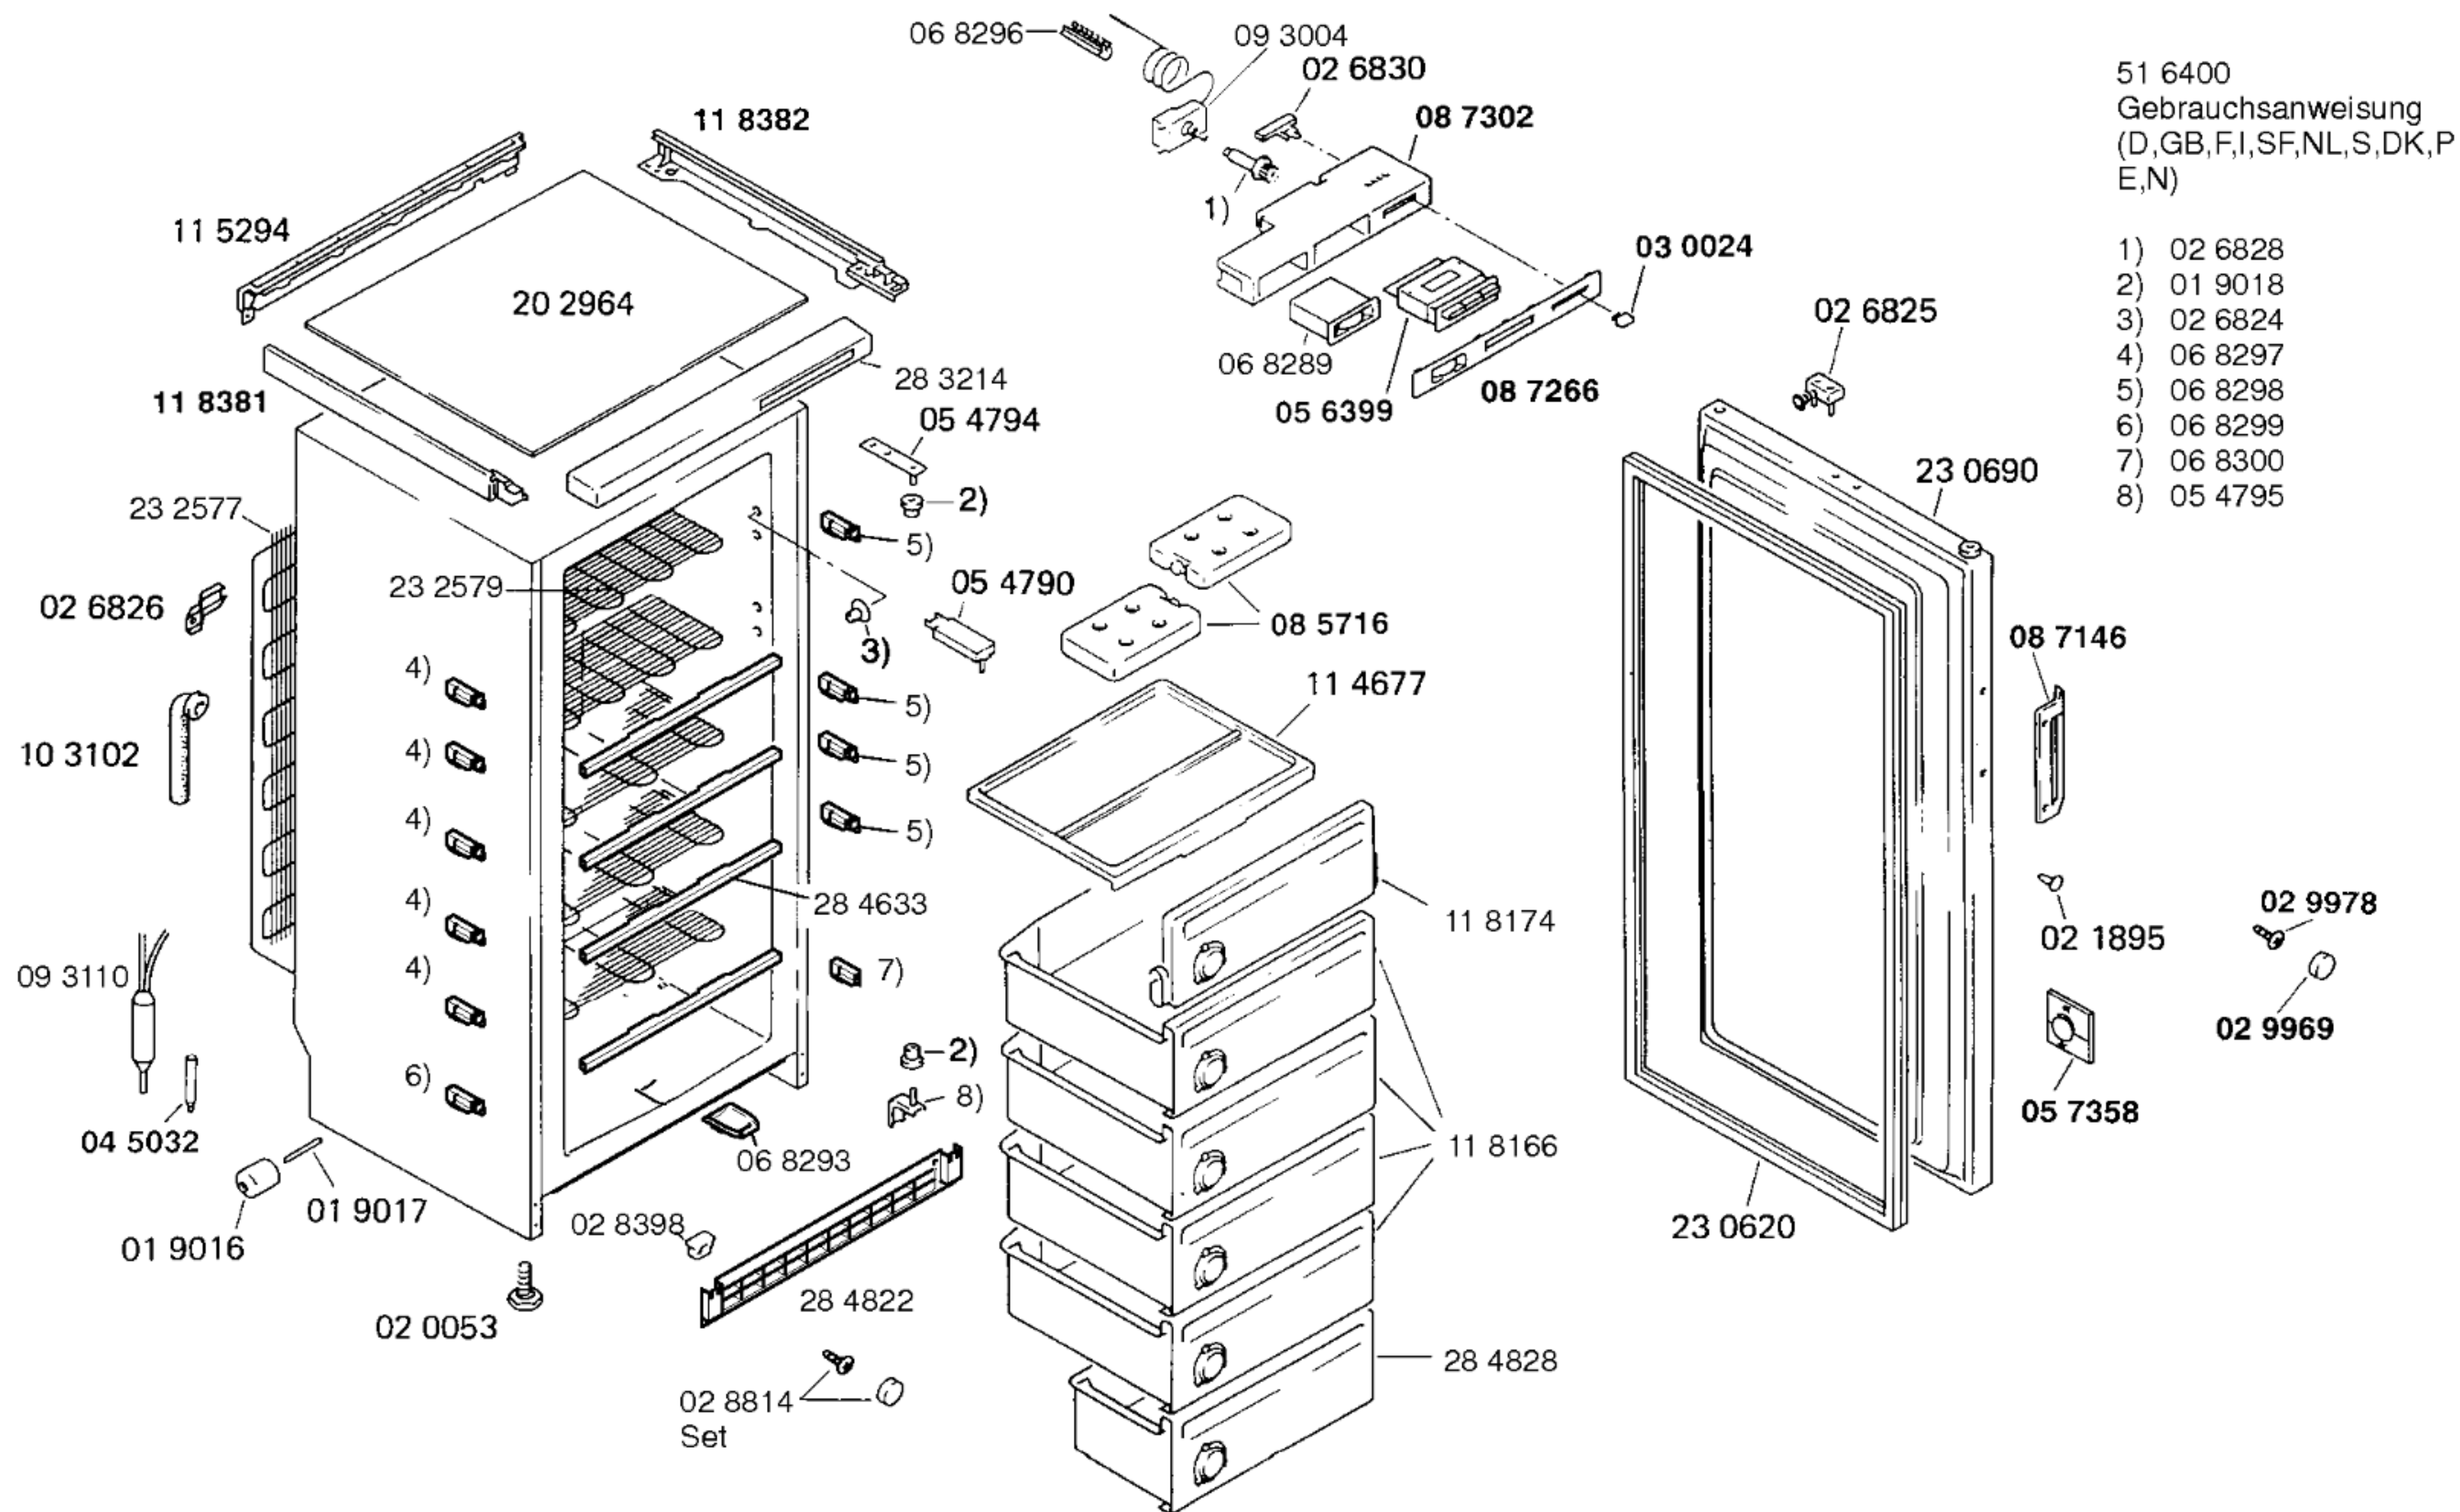

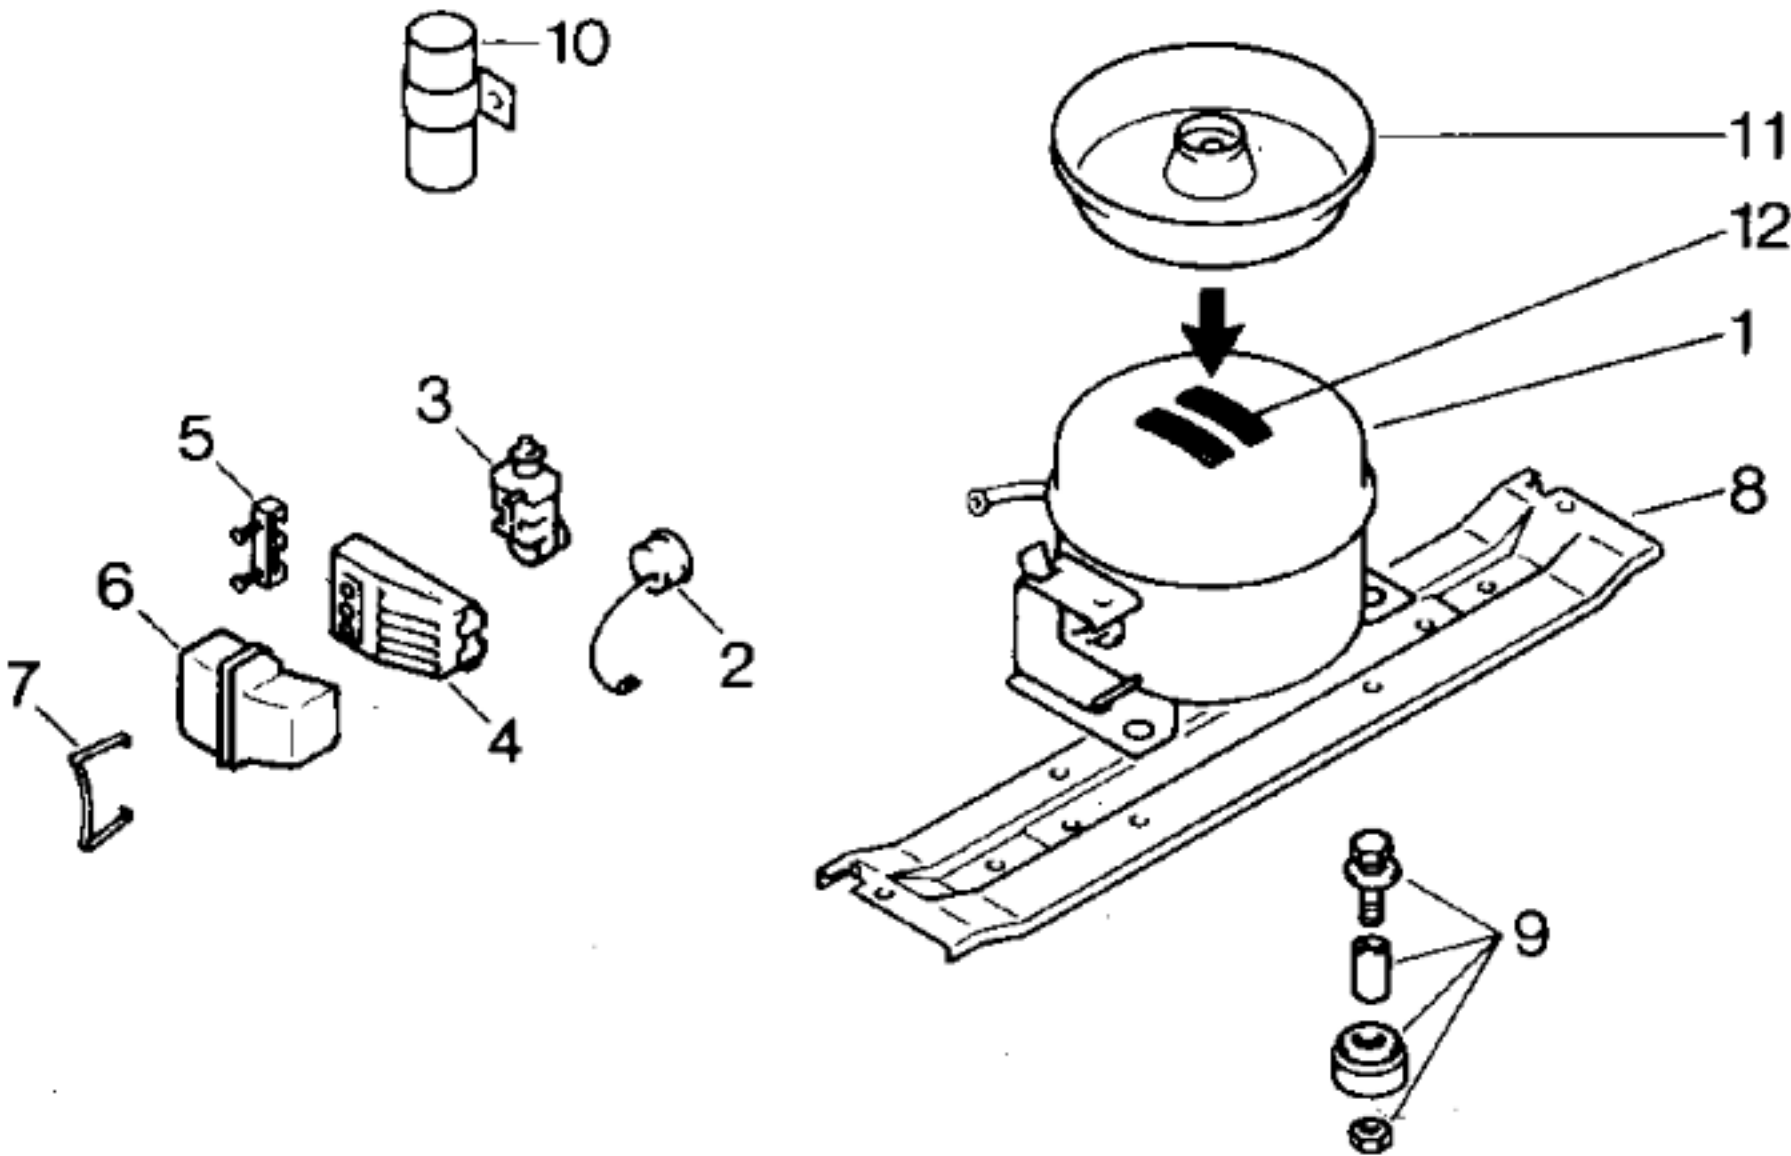

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Matsushita		
Typ/Type	D116LRAA		
Förderleistung/Delivery/Débit	I/h	1184	
Anlaufstrom/Starting current/Cour de démarrage	A	8,75	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	12,0	
	Hi/aux Ω	28,7	
Temp.-Regler/Thermostat	Danfoss		
Typ/Type	077 B 2054		
Reglerstellung/Position	kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-22	-14
Valeurs de commutation	„aus“	-32	-22
(„abtauen“ od.)	„alarm“	-17,5	-10
Füllmenge/Fill.quantity/Charge	R12	g	185
Anschlußwert/Conn.load/Puiss. connectée	W	150	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

Pos.	Matsushita		
	D116LRAA		
1	14 0563		
2			
3	05 8506		
4			
5			
6	05 8458		
7	02 6731		
8	11 1919		
9	05 0166		
10			
11			
12			