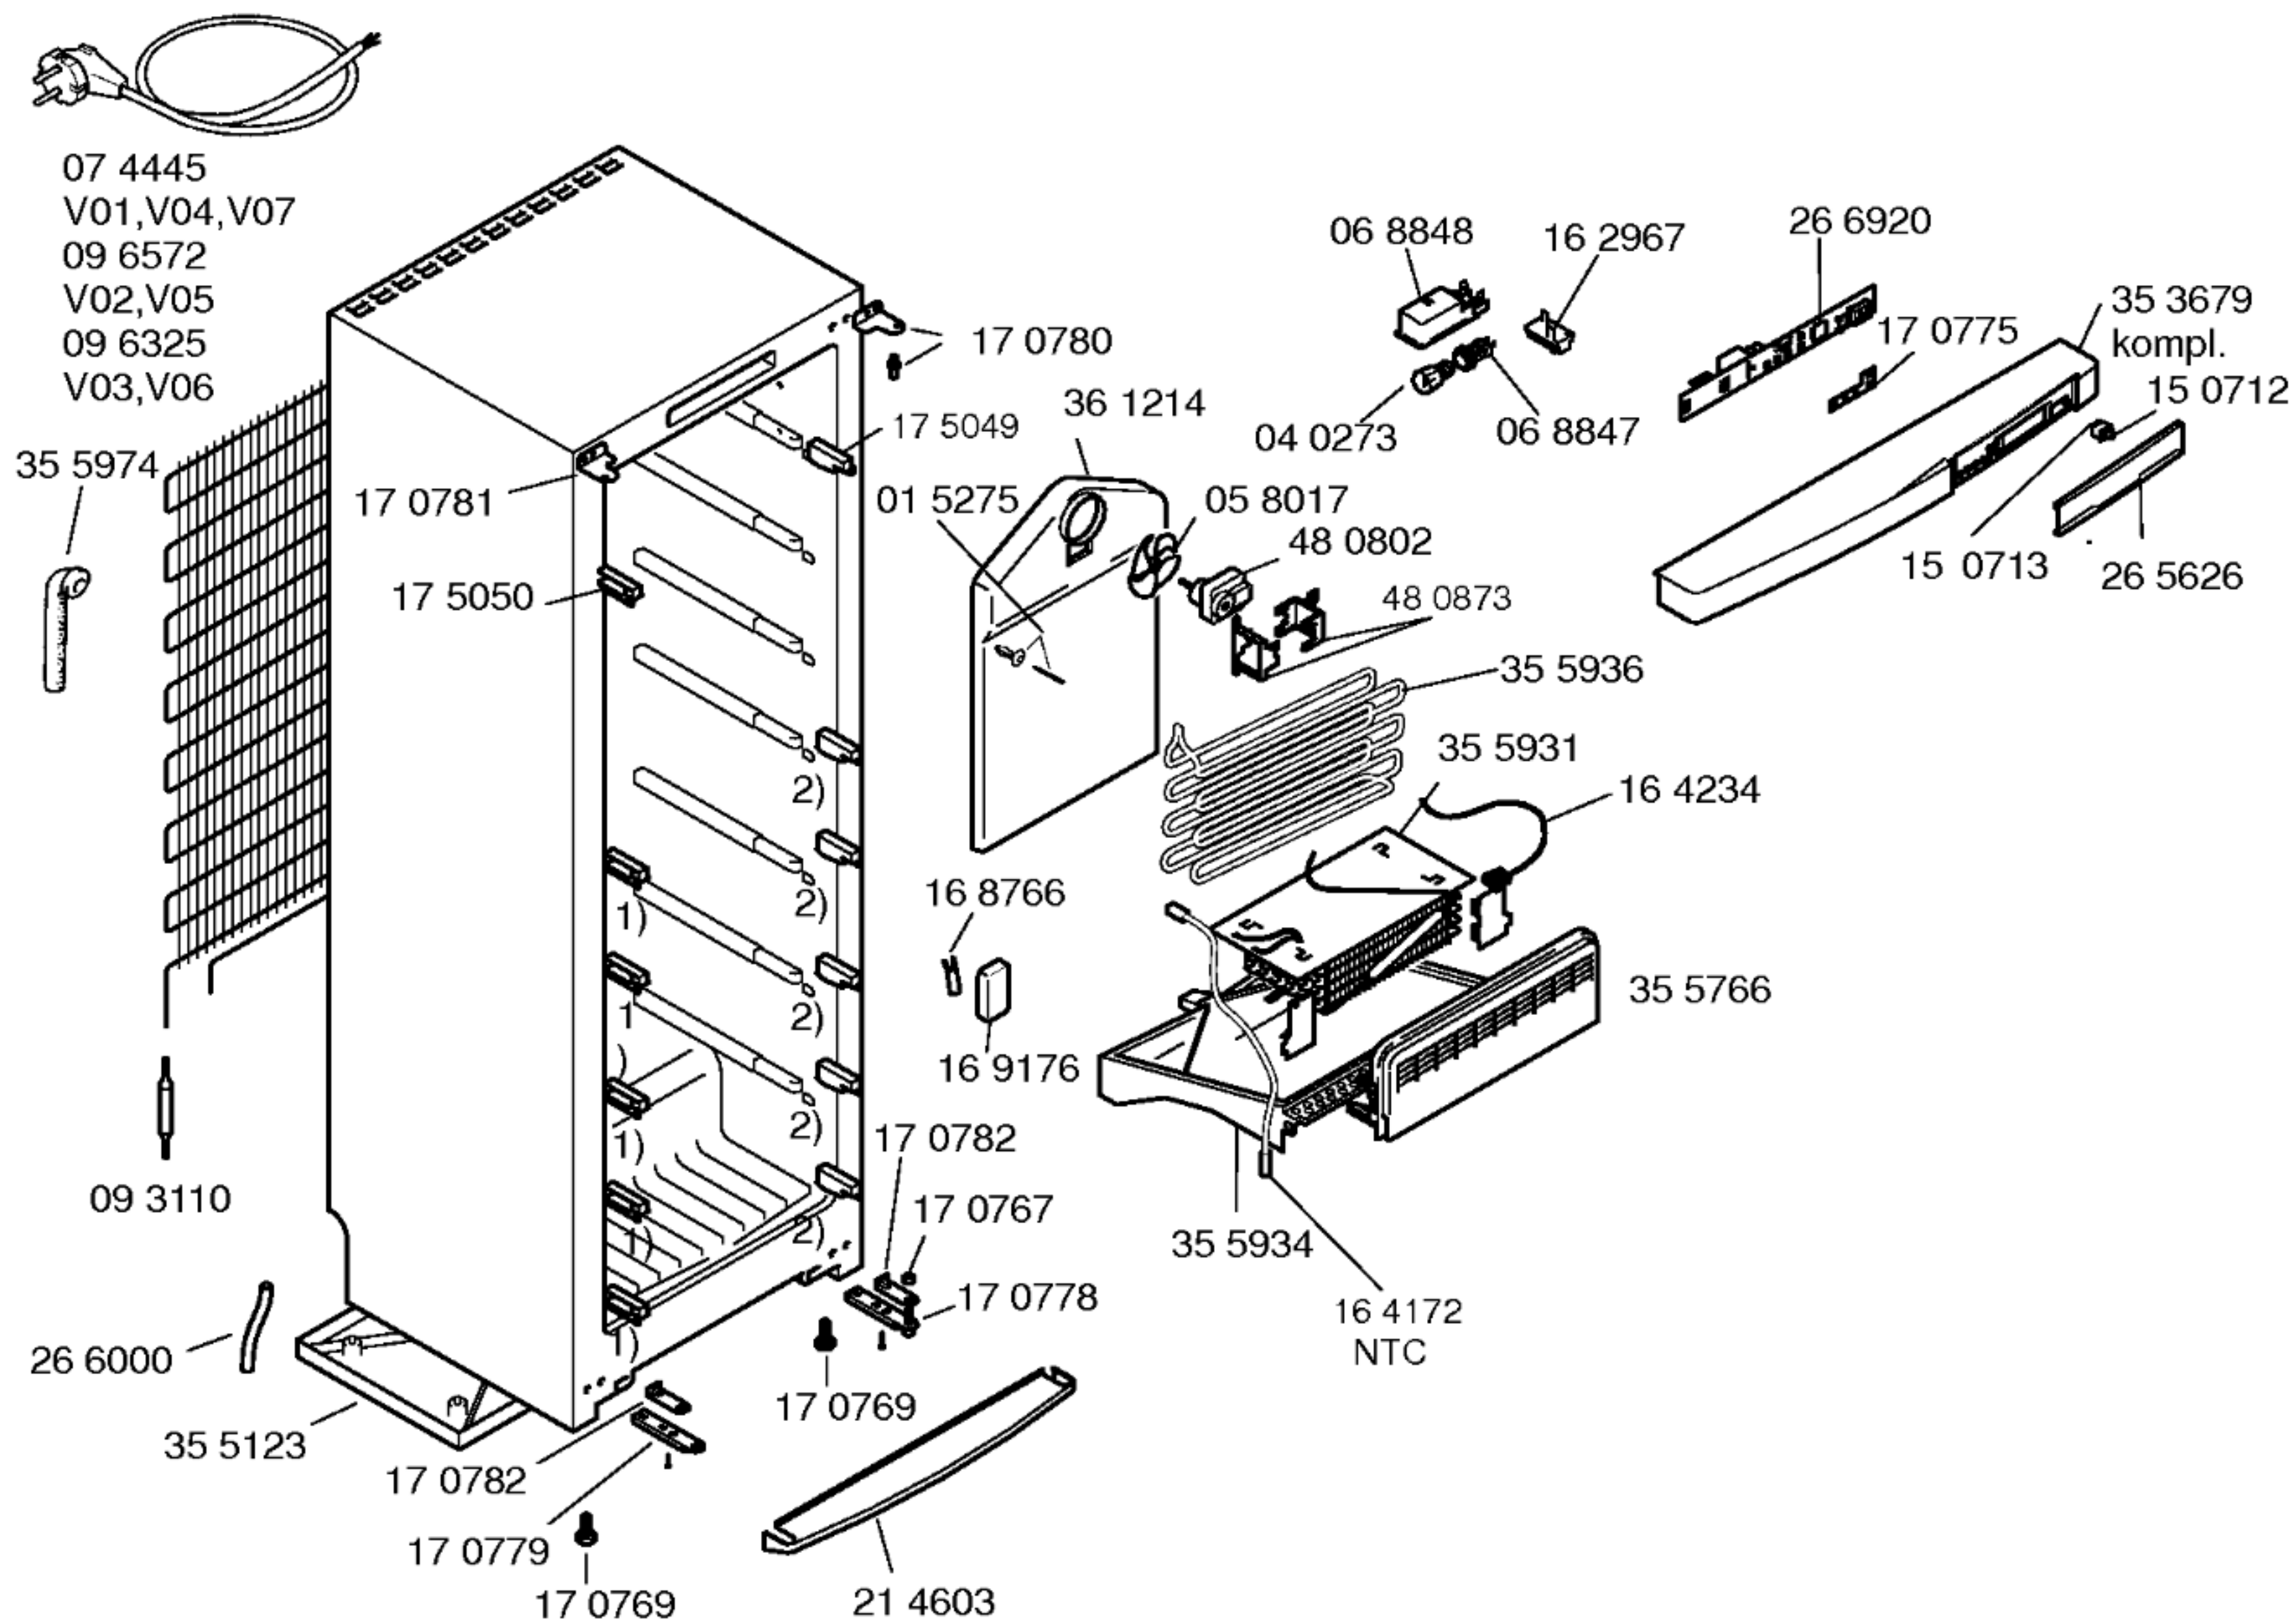



 Mat. - Nr. - Konstante  
 3740 . . . . .




 Gebrauchsanweisung  
 52 2851  
 (D,GB,F,I,NL,E,P)

 Montageanleitung  
 52 2772  
 (D,GB,F,I,NL,DK,N  
 SF,S,E,P,TR,GR)


 Beistellsatz  
 26 5629

 Side by Side  
 Beistellsatz zu KSR/KSK  
 48 1044

 Gefrierraumteiler  
 35 3678

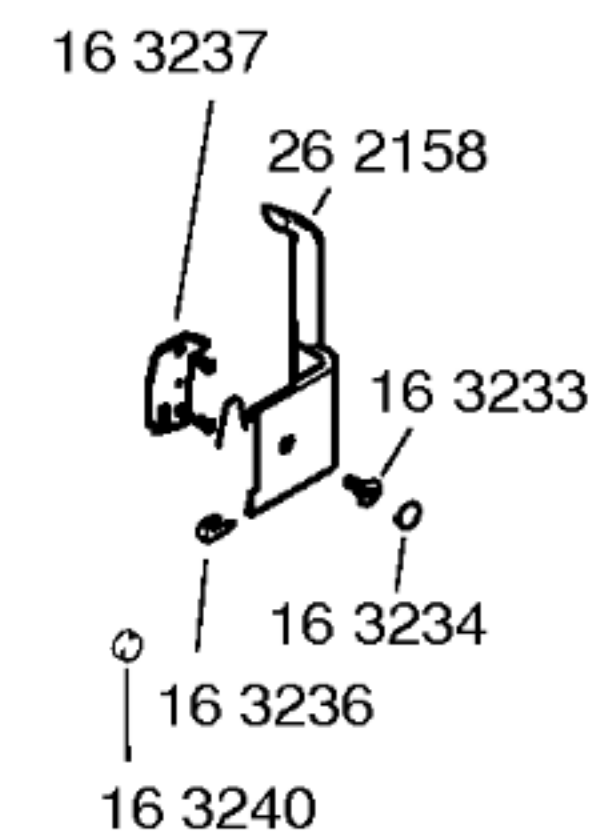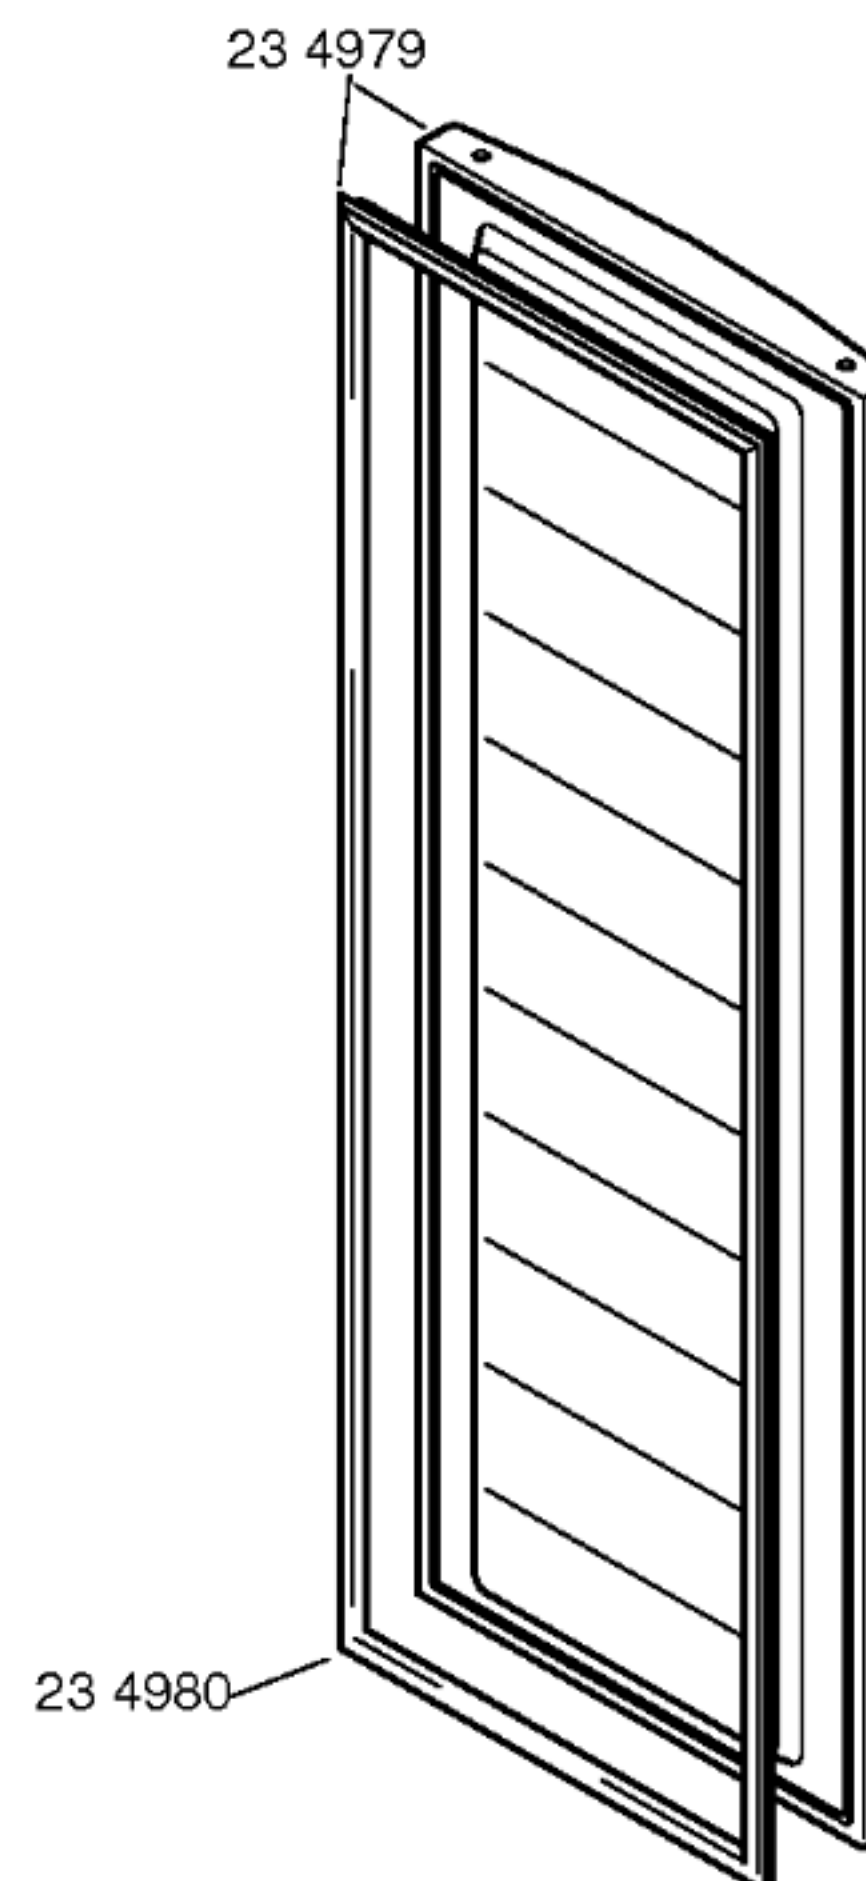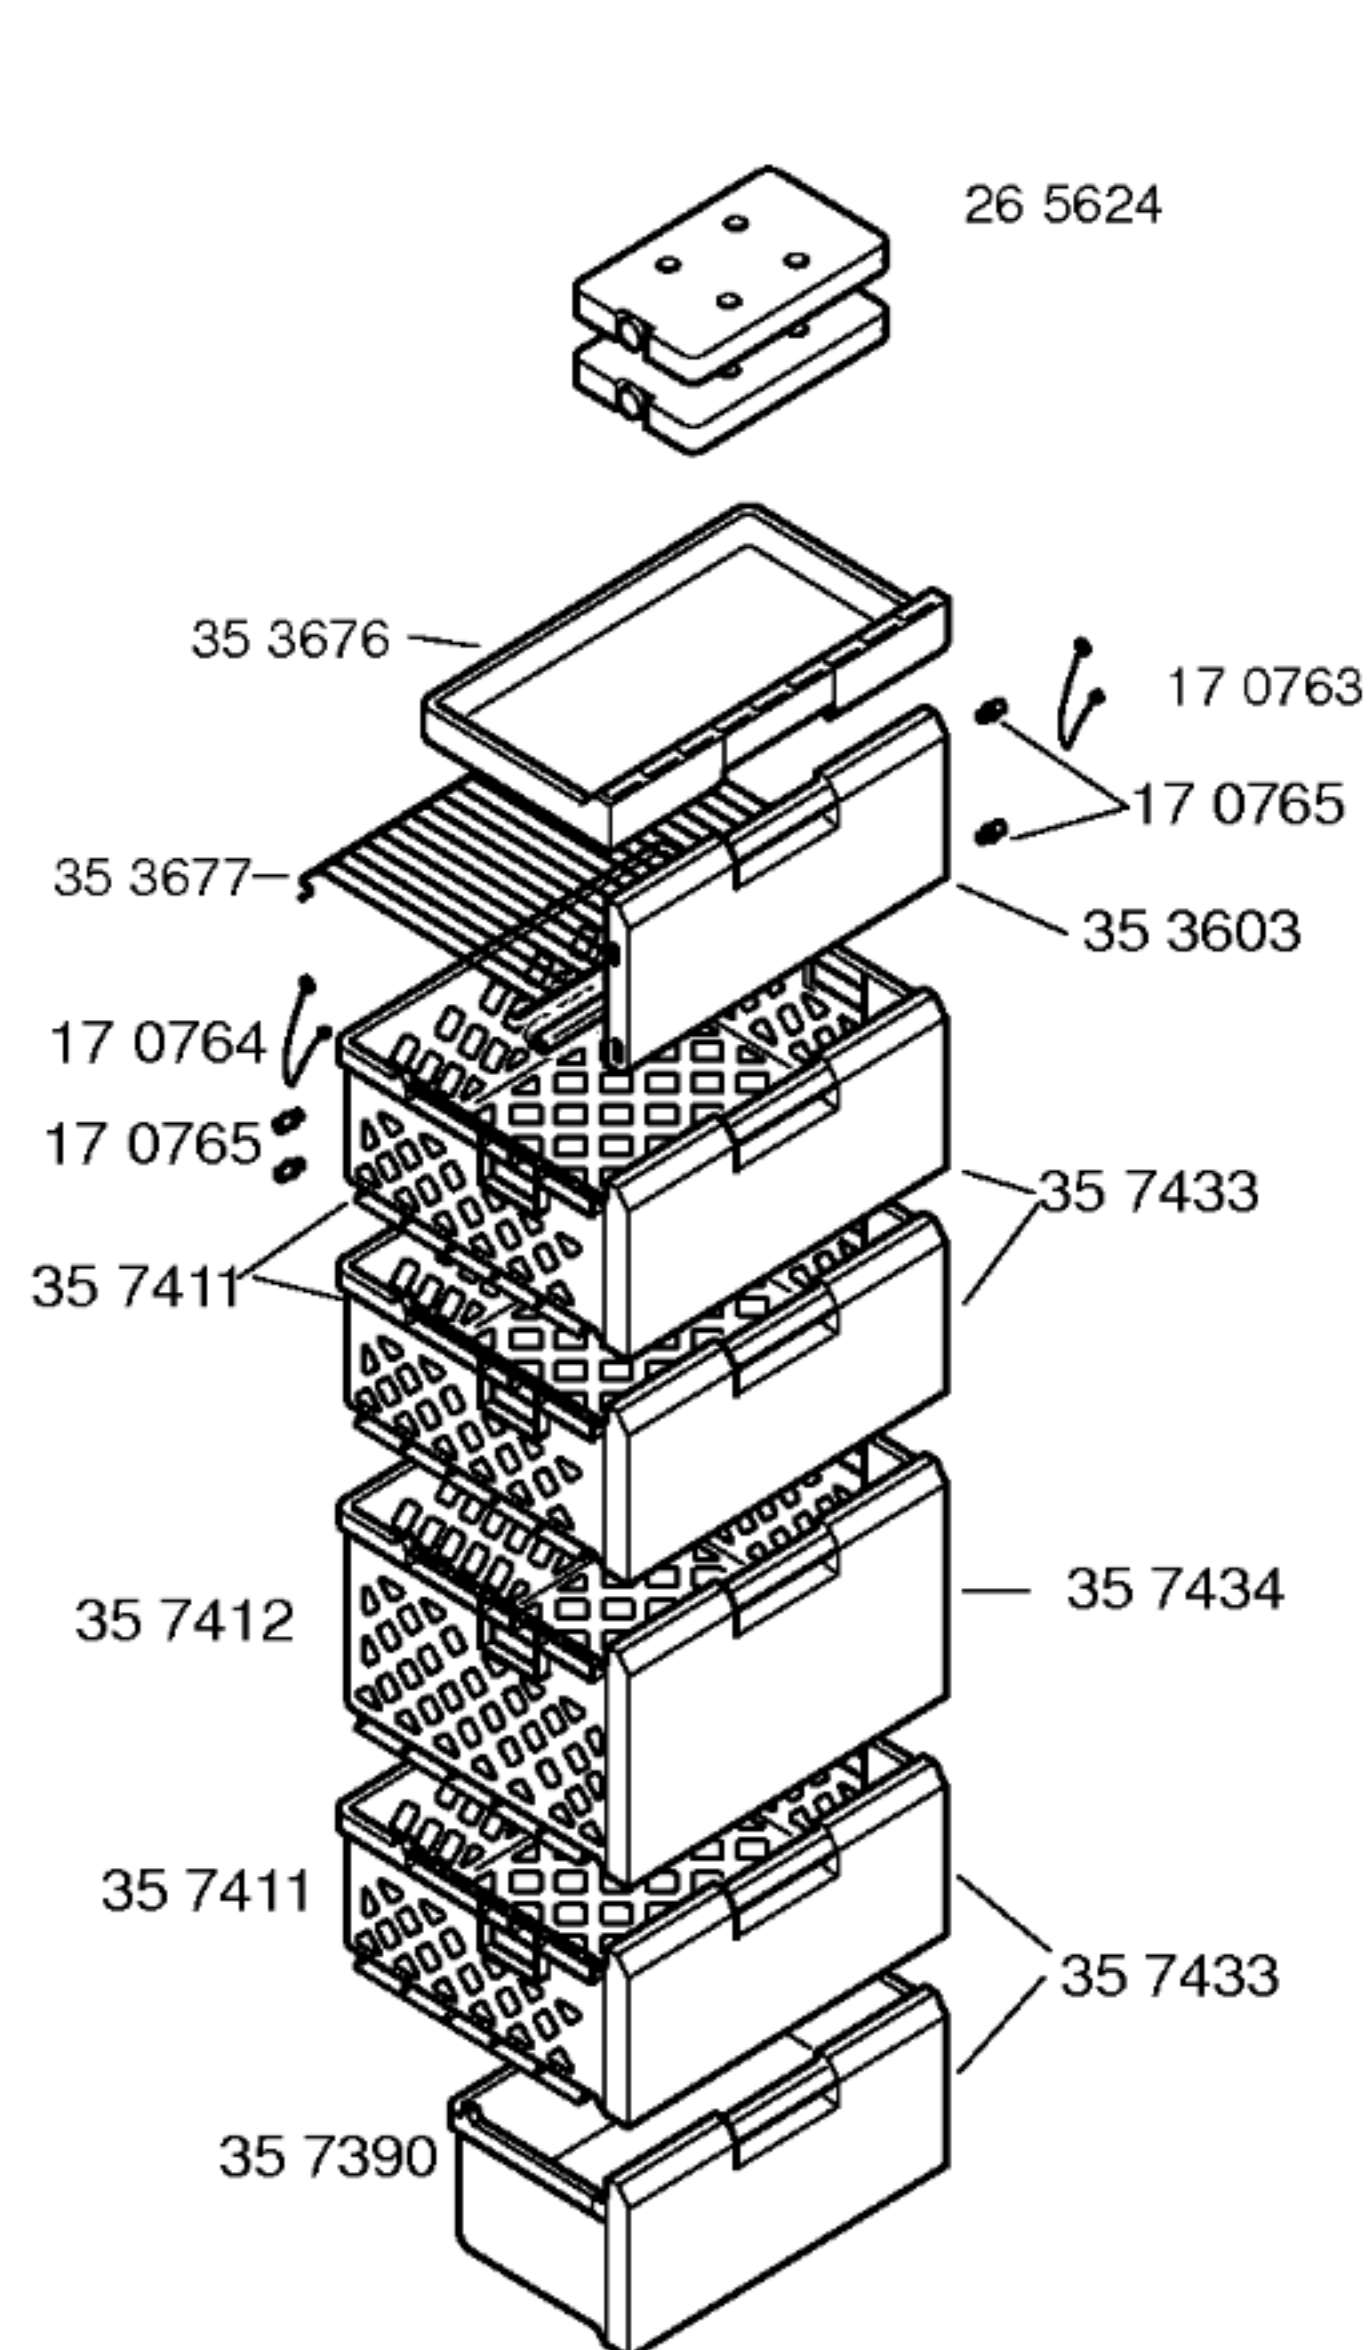



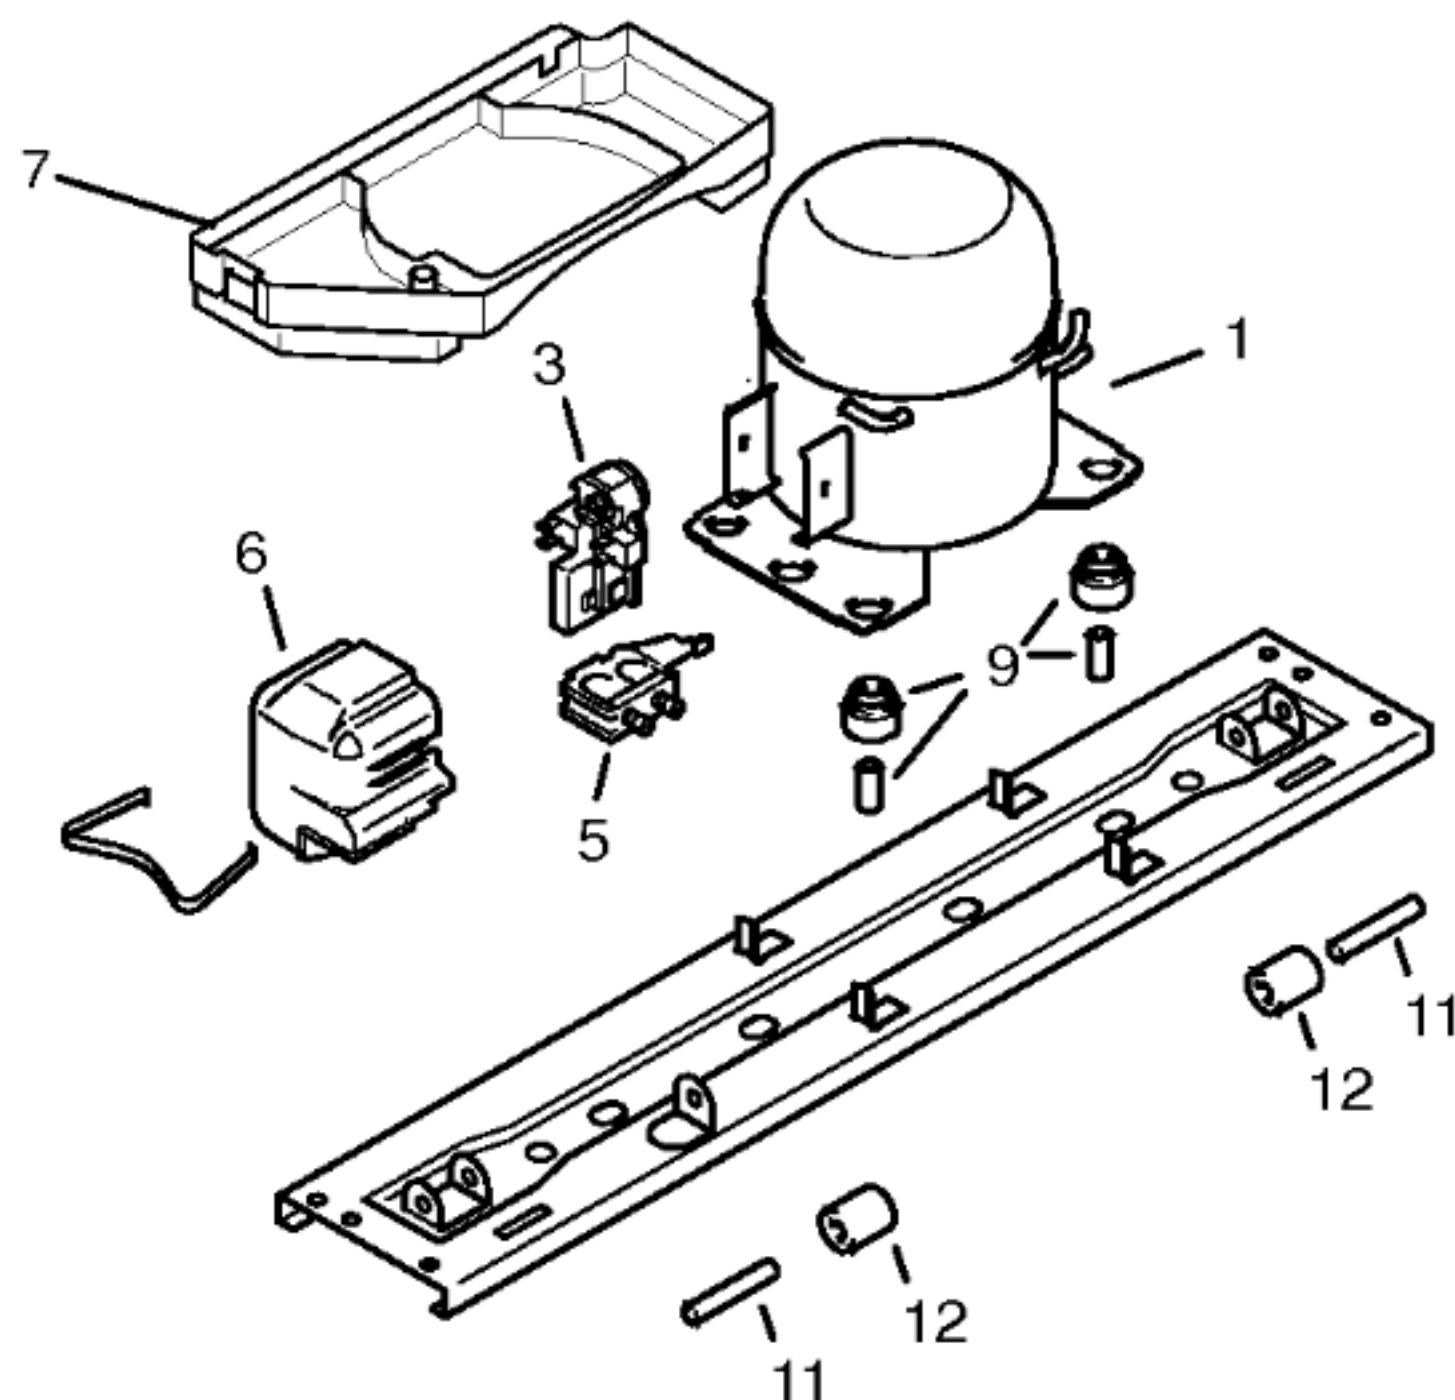

|      | V01-V03    | V04        | V05-V07 |
|------|------------|------------|---------|
|      | Matsushita | Matsushita | Danfoss |
| Pos. | DC125E     | DC125E     | NLY13K  |
| 1    | 141965     | 14 2131    | 14 1747 |
| 2    |            |            |         |
| 3    | 17 2967    | 17 2967    | 15 1055 |
| 4    |            |            |         |
| 5    | 16 2549    | 16 2549    | 15 0760 |
| 6    | 16 6782    | 16 6782    | 15 1072 |
| 7    | 08 8535    | 08 8535    | 09 6212 |
| 8    |            |            |         |
| 9    | 05 0166    | 05 0166    | 05 0166 |
| 10   |            |            |         |
| 11   | 01 9017    | 01 9017    | 01 9017 |
| 12   | 01 9016    | 01 9016    | 01 9016 |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |                |      |               |      |
|--------------------------------------------------------|--|----------------|------|---------------|------|
| Verdichter/Compressor/Compresseur                      |  | Matsushita     |      | Danfoss       |      |
| Typ/Type                                               |  | DC125E         |      | NLY13K        |      |
| Förderleistung/Delivery/Débit                          |  | l/h            | 2246 |               | 2394 |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A              | 9,2  |               | 11,3 |
| Widerstand/Resistance/Résistance                       |  | Ω              | 12,1 |               | 11,0 |
| Hi/aux                                                 |  | Ω              | 13,8 |               | 9,0  |
| Temp.-Regler/Thermostat                                |  | Elektronisch   |      |               |      |
| Typ/Type                                               |  | EIN AUS        |      |               |      |
| Regelstellung/Position                                 |  | -15 -16        |      |               |      |
| Schaltwerte/Switching values                           |  | "warm" -19 -20 |      |               |      |
| Valeurs de commutation                                 |  | "kalt" -23 -24 |      |               |      |
|                                                        |  | "alarm" -9 -14 |      |               |      |
| Füllmenge/Fill.quantity/Charge                         |  | R600a          | *    | *             |      |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W              | 120  | 133           |      |
| Heizung/Heater/Chauffage                               |  | Abtauheizung   |      | Rinnenheizung |      |
| Widerstand/Resistance/Résistance                       |  | Ω              | 288  | 240           |      |
| Leistung/Power/Puissance                               |  | W              | 200  | 24            |      |
| Ventilator/Blower/Ventilateur                          |  |                |      |               |      |
| Widerstand/Resistance/Résistance                       |  | Ω              | 560  |               |      |
| Raumtemperaturfühler                                   |  | C              | K    | C             | k    |
|                                                        |  | +10            | 9,9  | -18           | 43,3 |
|                                                        |  | +5             | 12,7 | -22           | 54,6 |
|                                                        |  | +0             | 16,3 | -26           | 69,4 |
| Widerstand NTC-Fühler                                  |  | °C             | kΩ   | °C            | kΩ   |
|                                                        |  | -1             | 17,3 | -15           | 36,5 |
|                                                        |  | -9             | 26,2 | -16           | 38,8 |
|                                                        |  | -14            | 34,5 | -19           | 45,9 |
|                                                        |  | -20            | 48,6 | -23           | 58,1 |
|                                                        |  | -24            | 61,6 |               |      |
| Magnetventil/Magnetic valve/Electrovanne               |  |                |      |               |      |
| Widerstand/Resistance/Résistance                       |  | Ω              |      |               |      |
| Spannung/Voltage/Tension                               |  | V              |      |               |      |

\* siehe Typenschild