




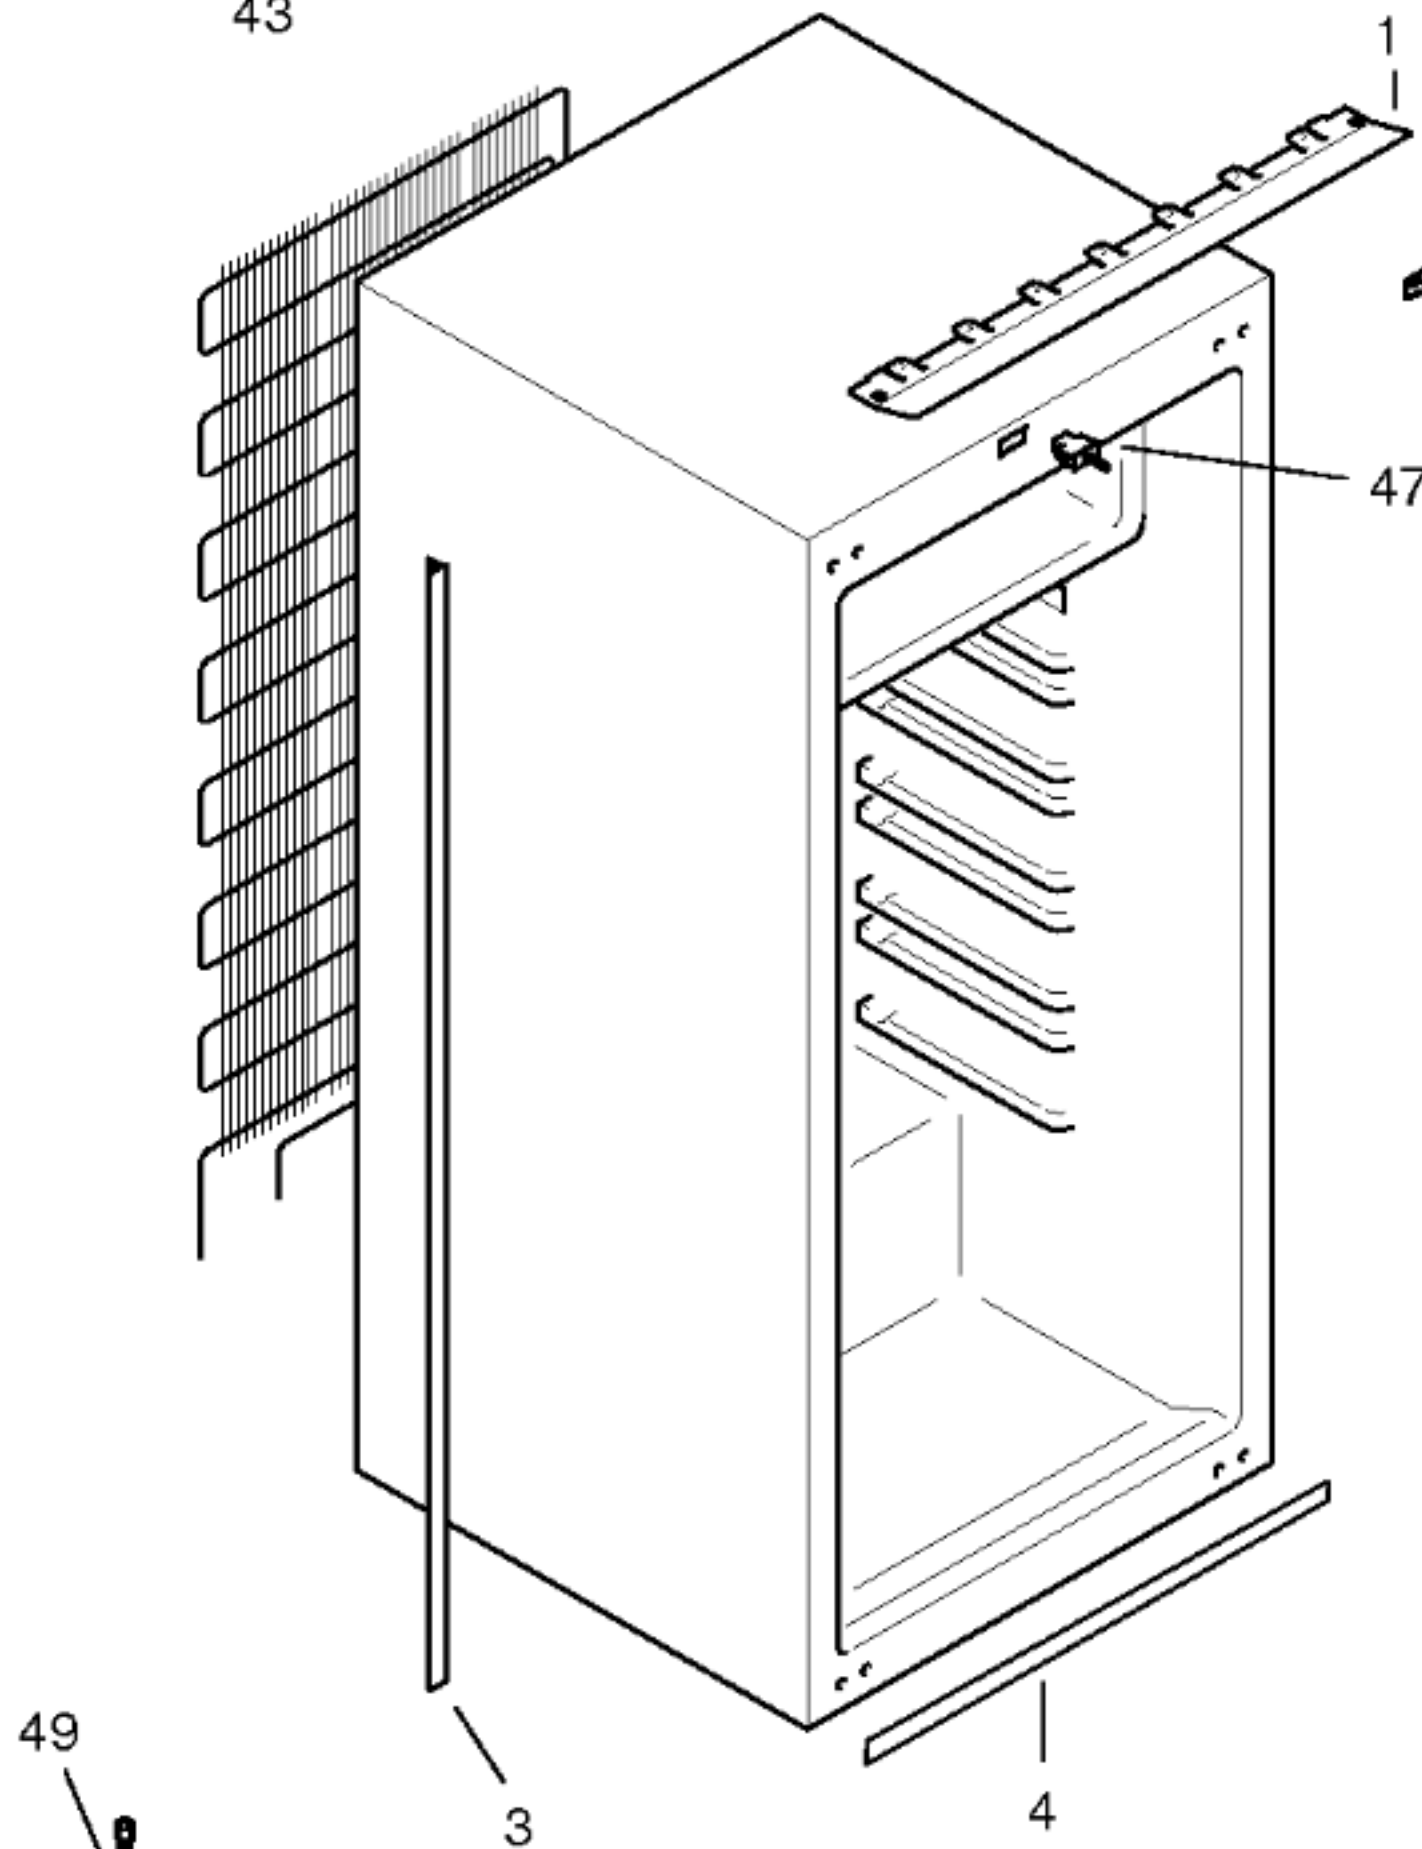

43

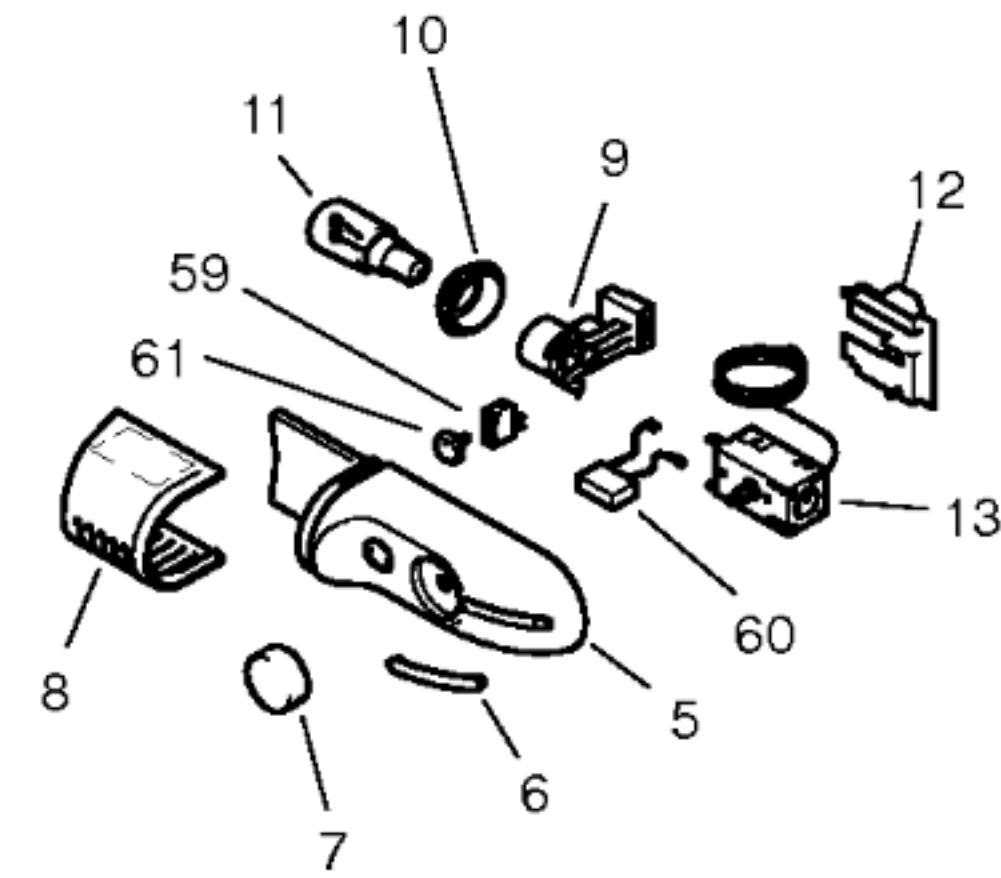


2
Set

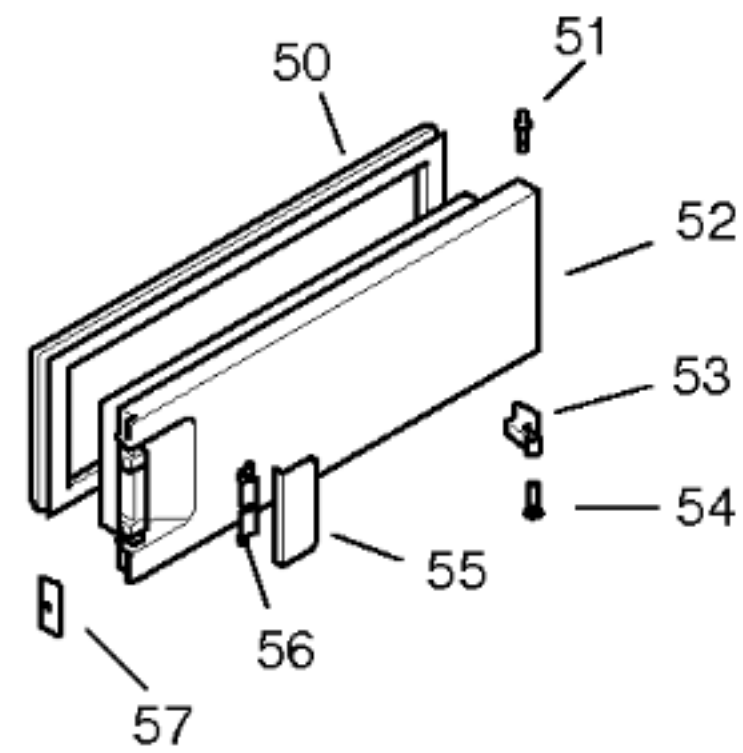


44

45

46

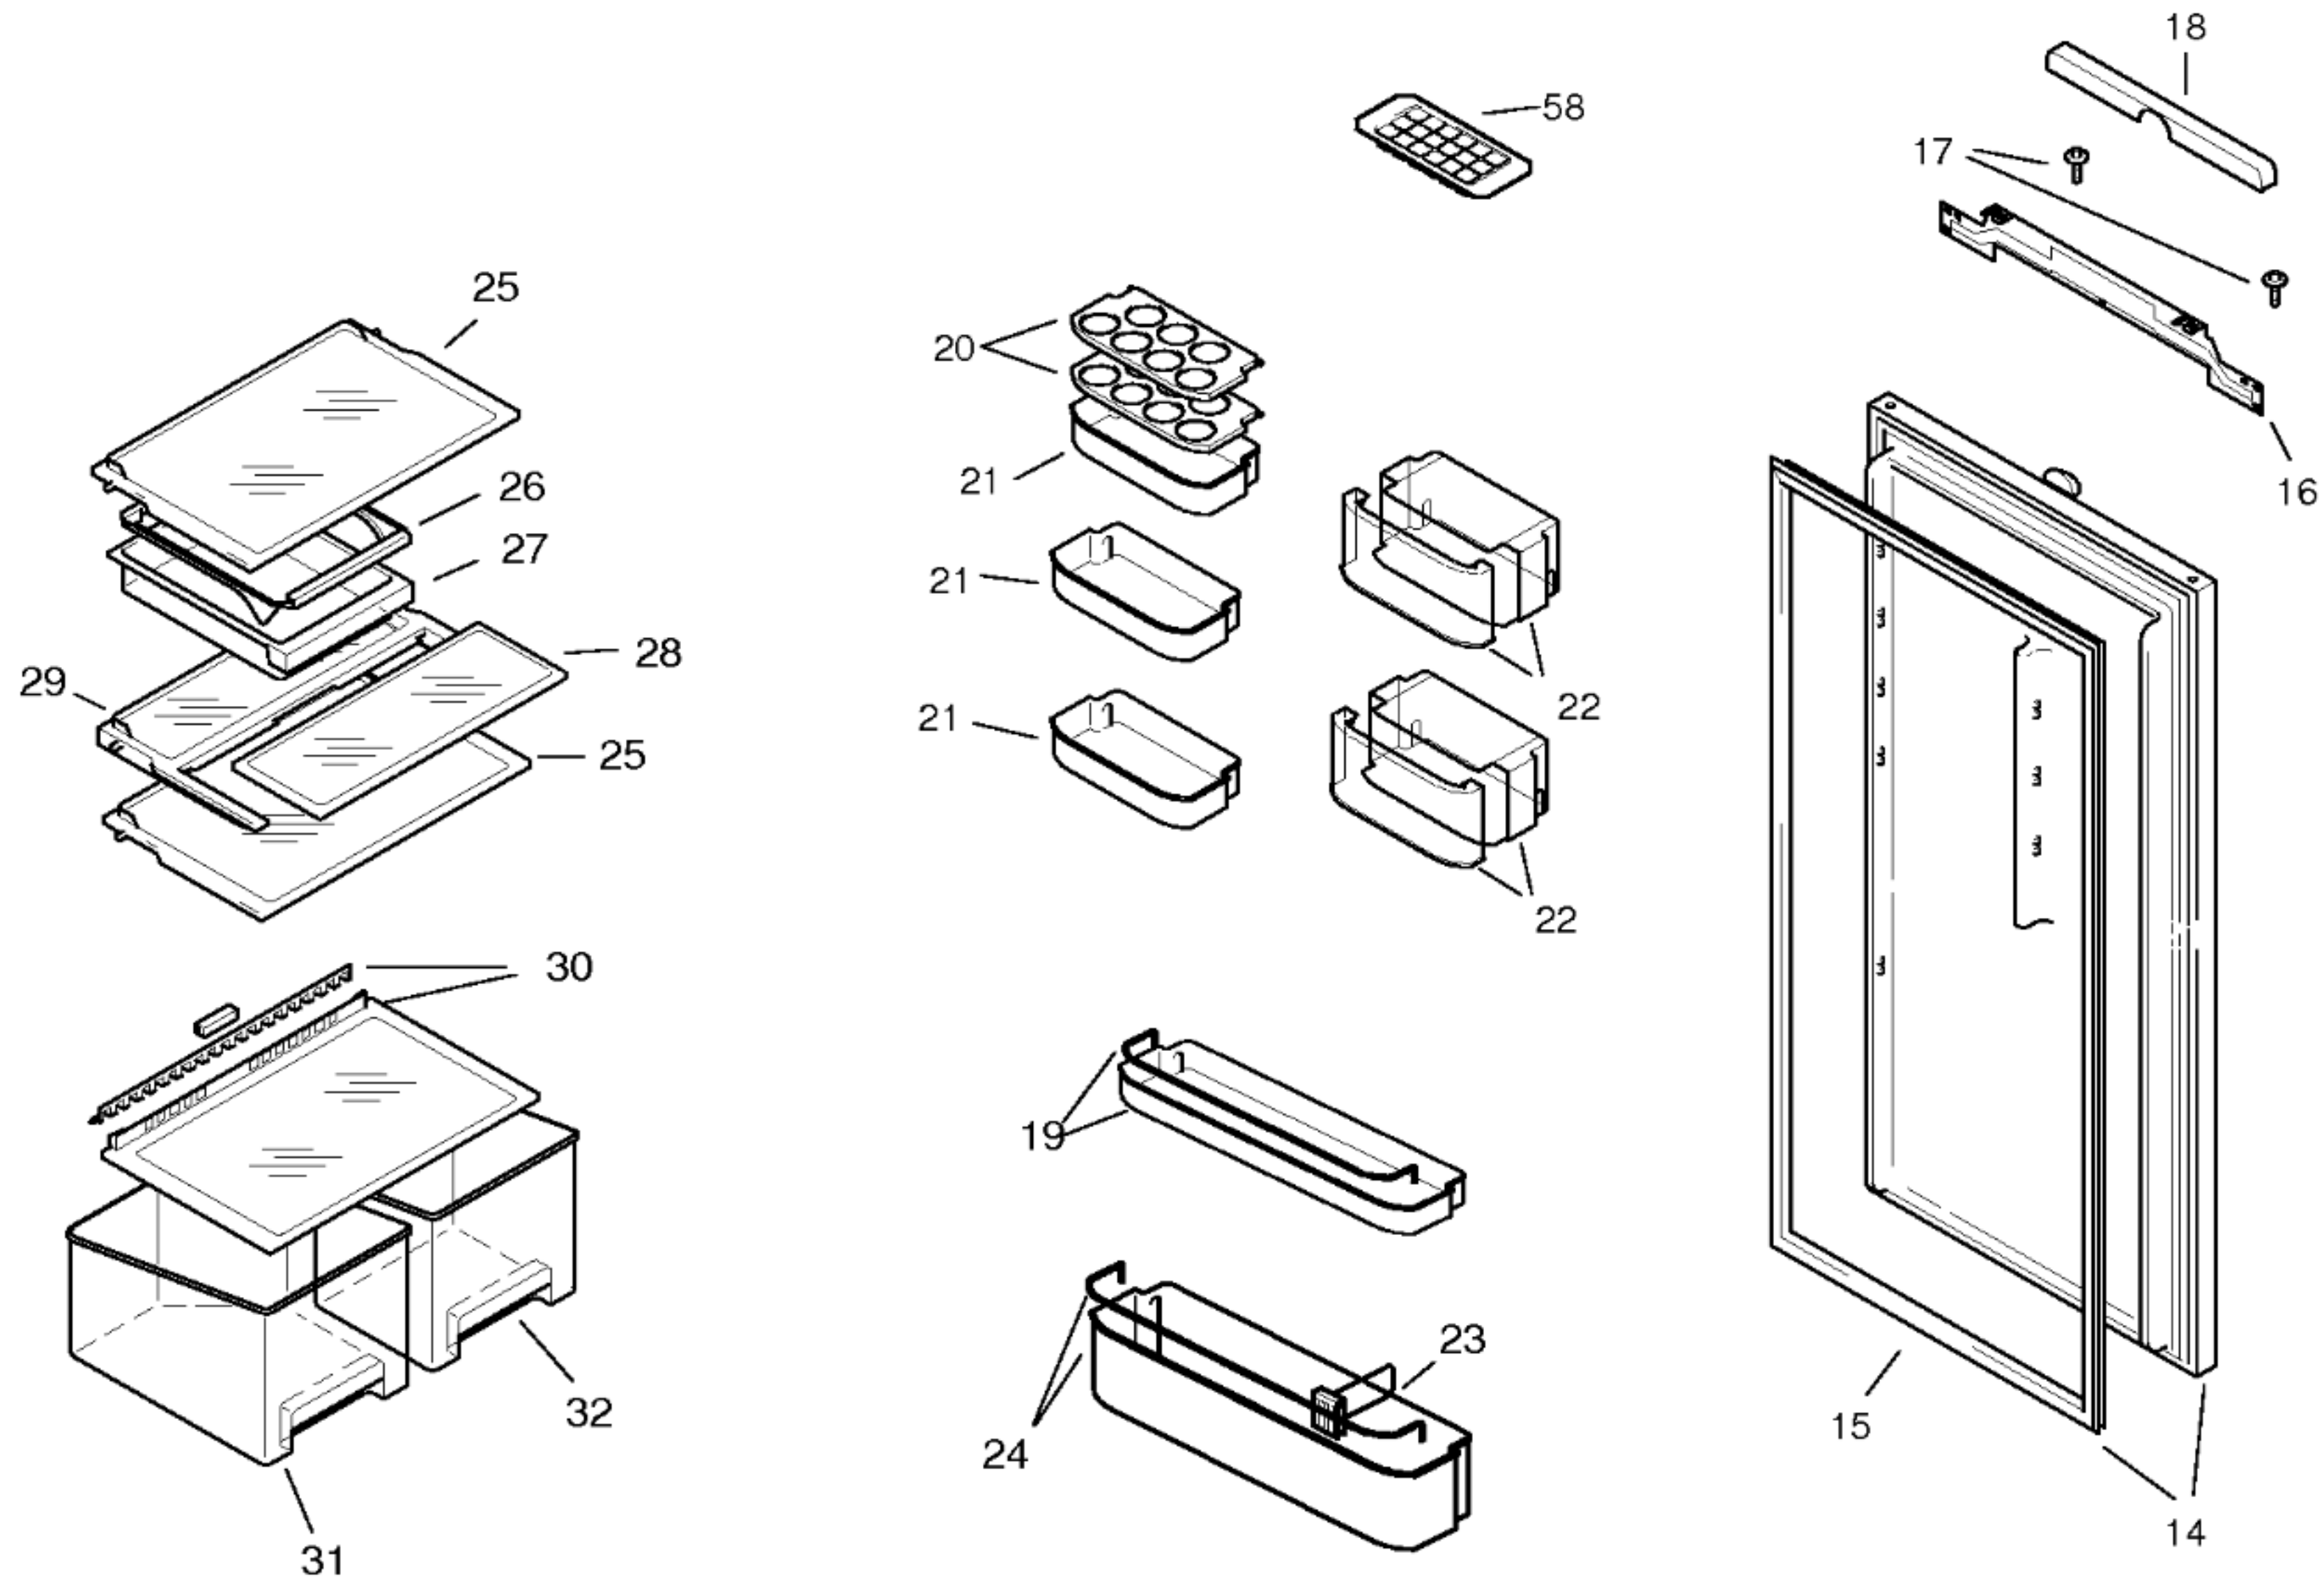

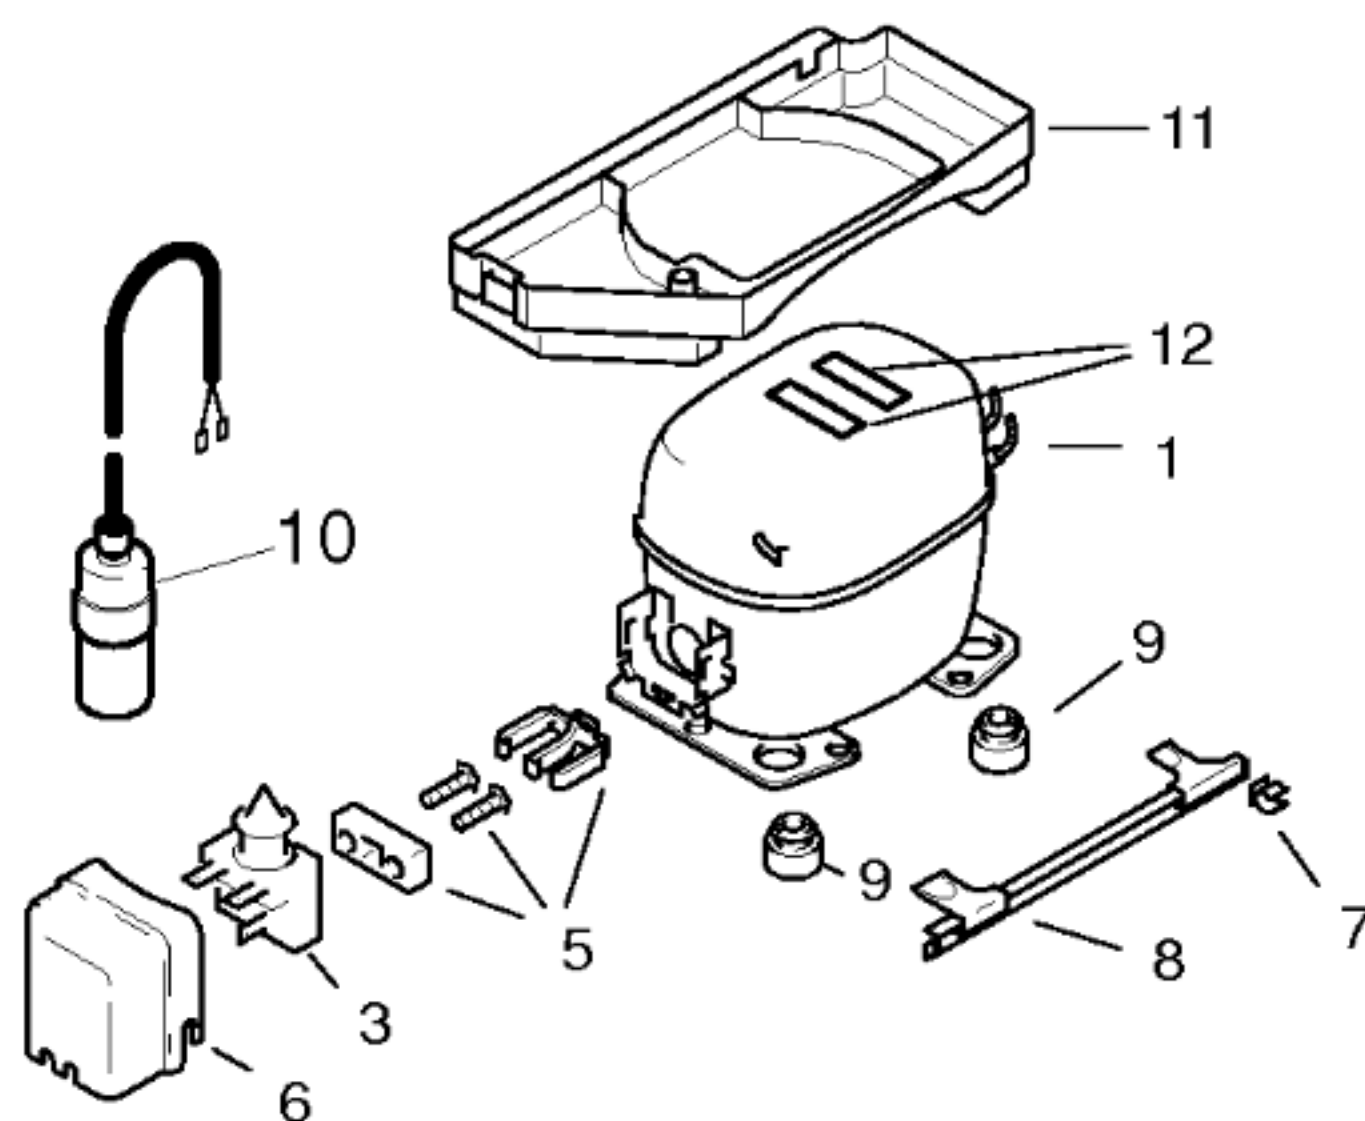

	V01	V02	
Pos.	Danfoss TLY7KK2	Matsushita ESS 60E	
1	33	33	
2			
3	34	34	
4			
5	35	35	
6	36	36	
7	37	37	
8	38	38	
9	39	39	
10	40	40	
11	41	41	
12	42	42	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Matsushita
Typ/Type		TLY7K		ESS 60E
Förderleistung/Delivery/Débit		l/h	1168	1076
Anlaufstrom/Starting current/Cour de démarrage		A	5,7	5,6
Widerstand/Resistance/Résistance Ha/main/prin		W	27,1	30,6
Hi/aux		W	27,2	26,7
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K59		
Regelstellung/Position		kalt	warm	
Schaltwerte/Switching values		"warm"	+5,2	+5,2
Valeurs de commutation		"kalt"	-32,0	-15,0
Füllmenge/Fill.quantity/Charge		R600a	+	
Anschlußwert/Conn.load/Puiss. connectée		W	67	63
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		W		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		W		
Temp.-Regler/Thermostat				
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		W		
Spannung/Voltage/Tension		V		

* siehe Typenschild