



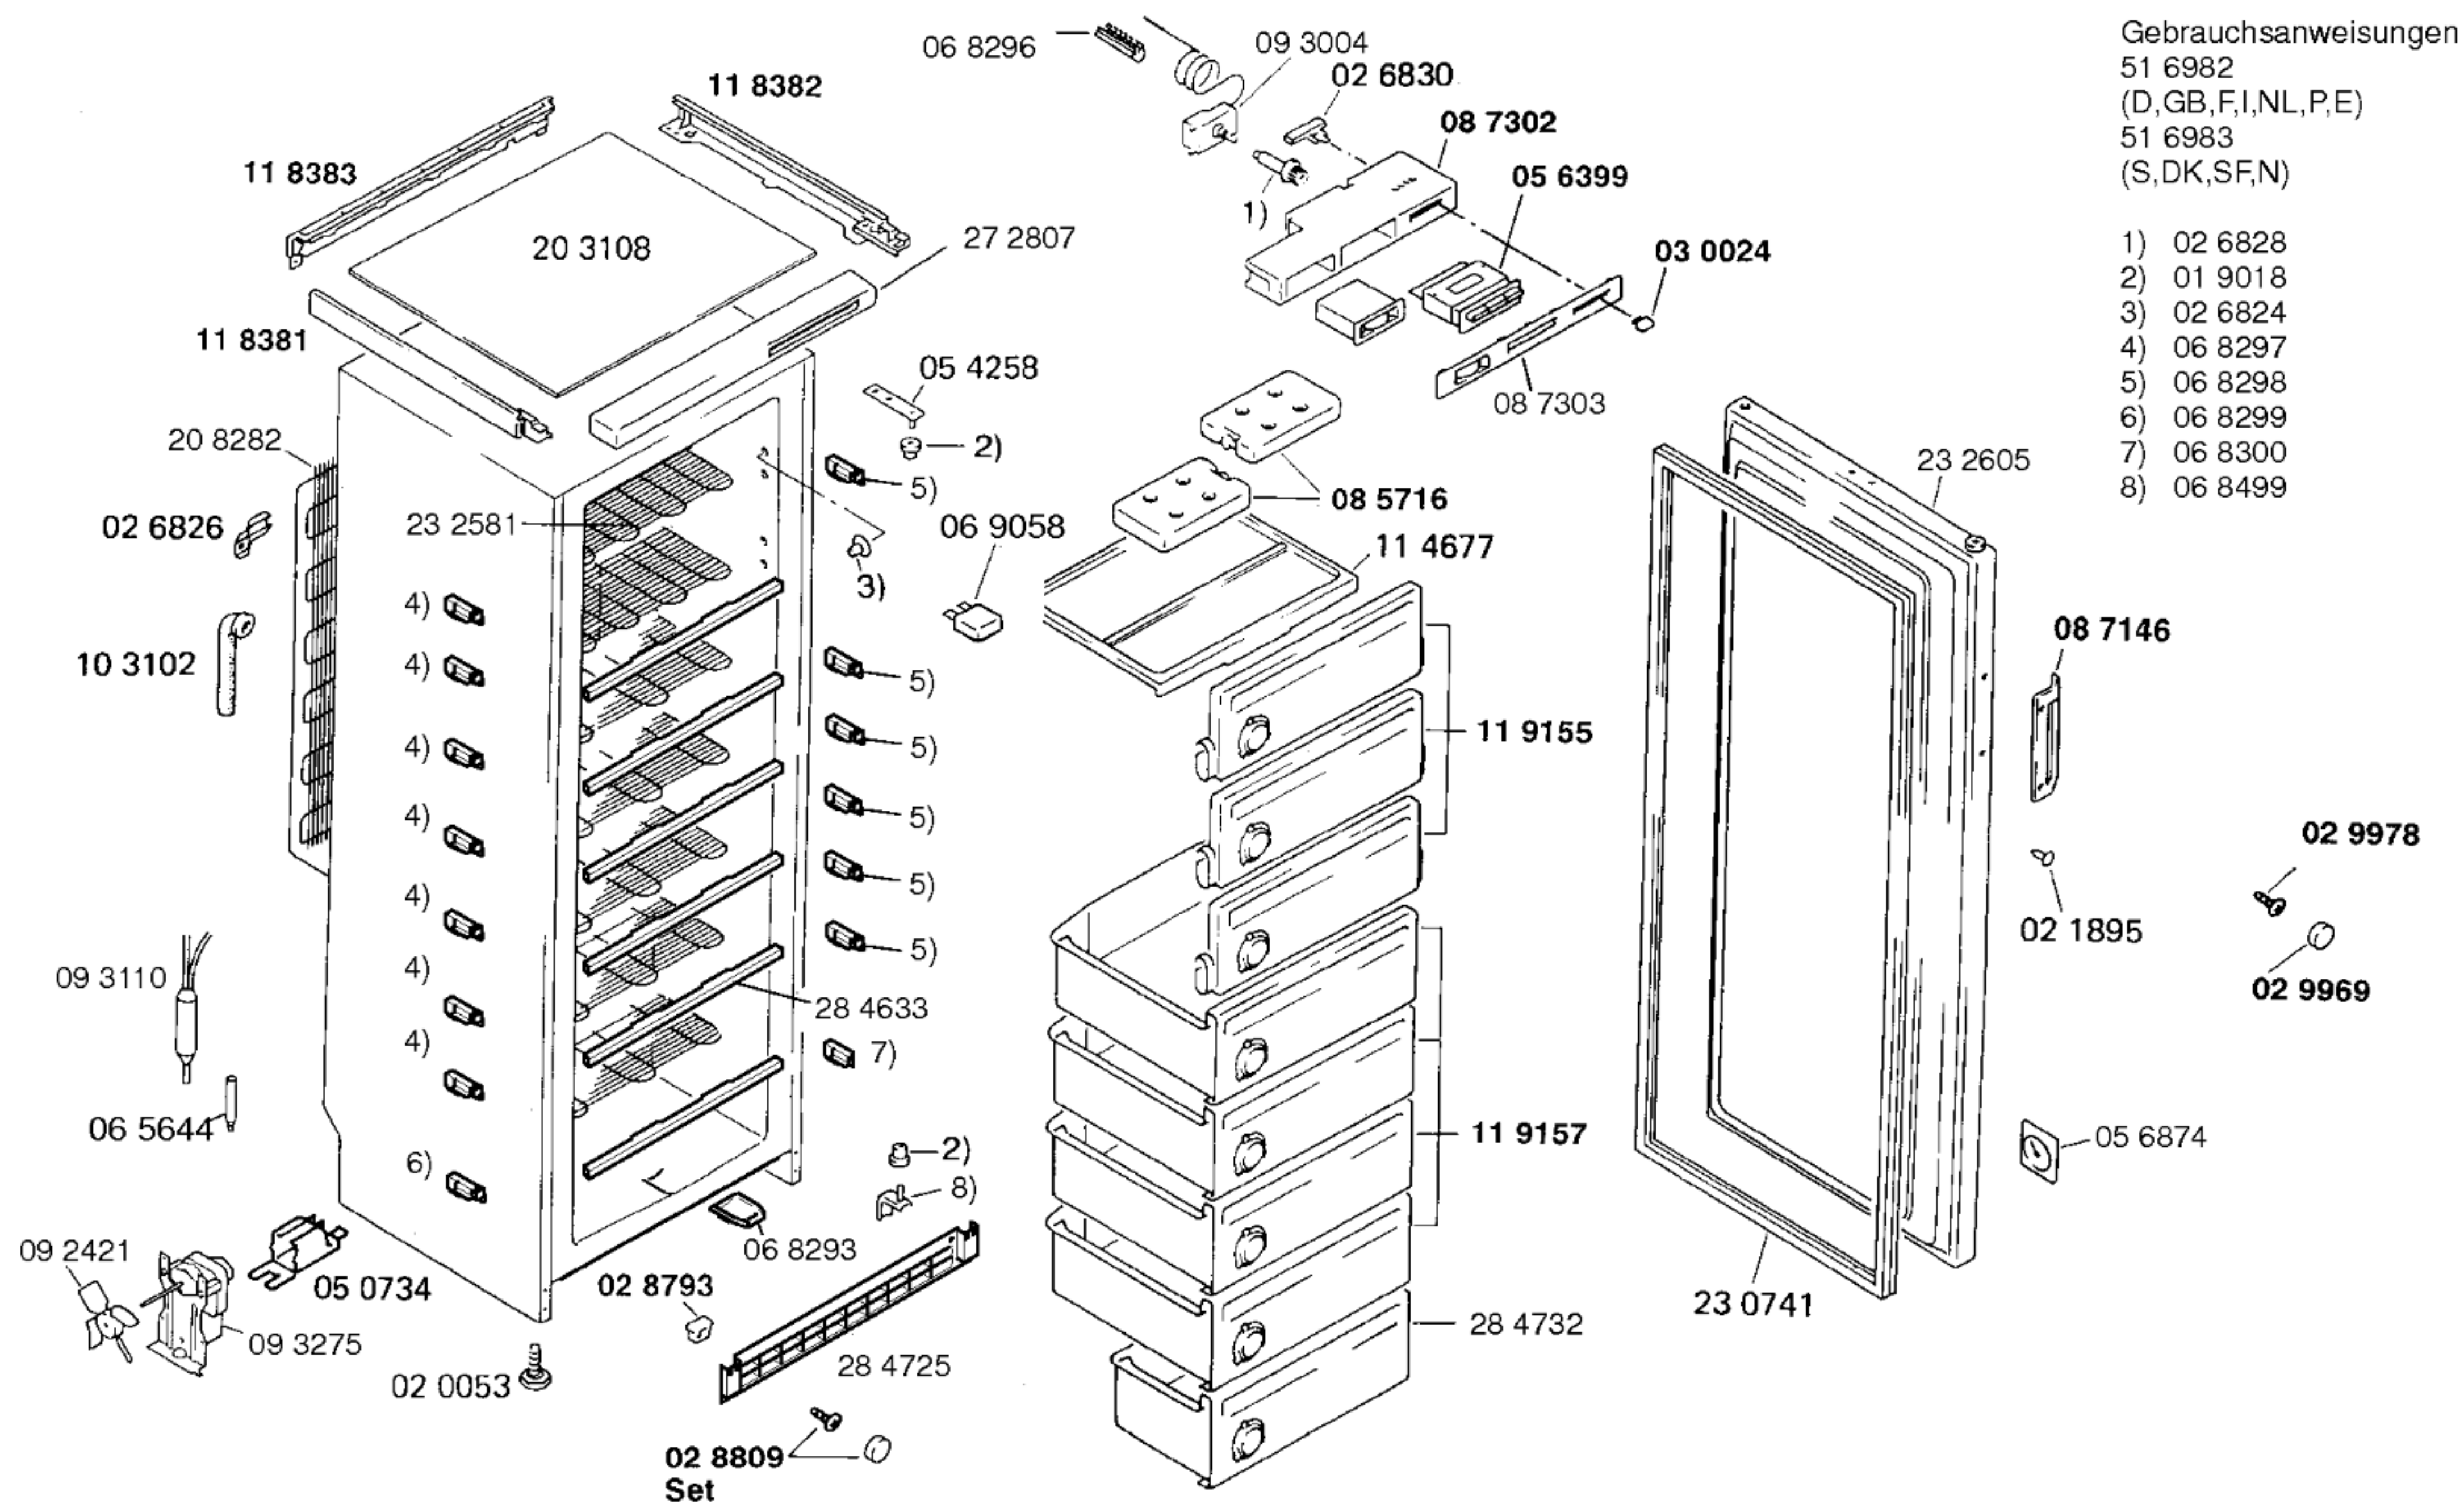

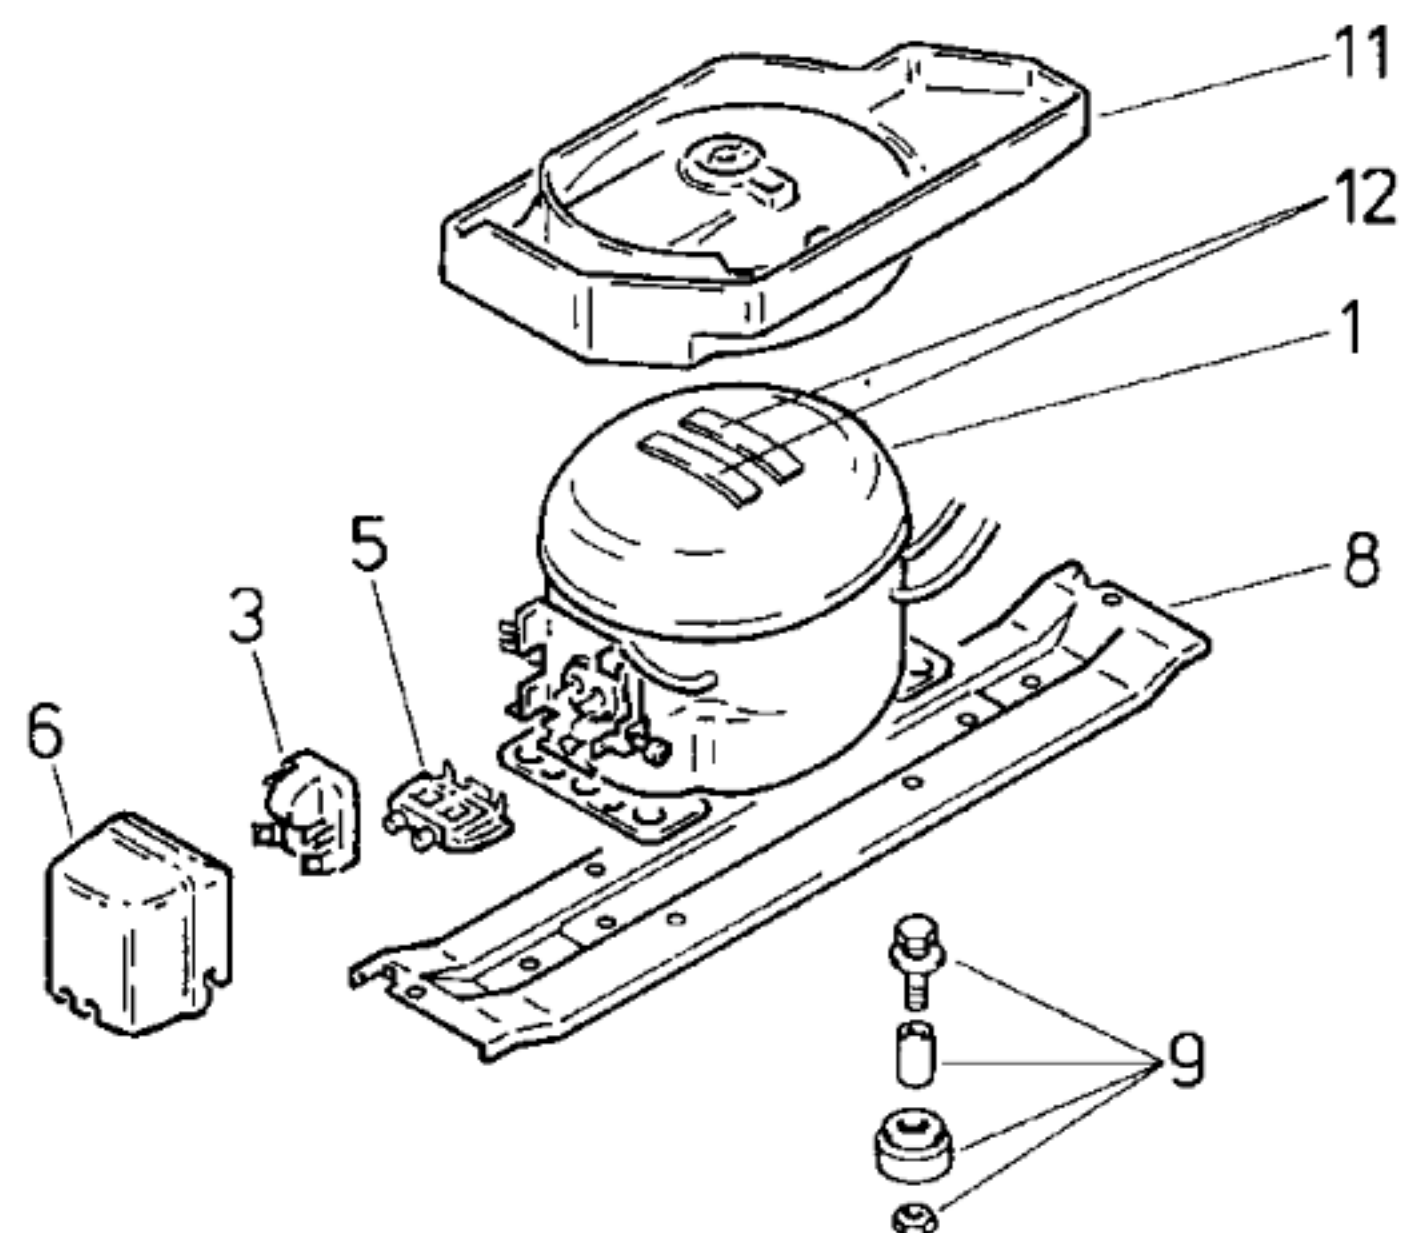

| Pos. | V01-V04 | V05       |  |
|------|---------|-----------|--|
|      | Danfoss | Aspera    |  |
|      | NLE9F   | BK 1116 Z |  |
| 1    | 14 1257 |           |  |
| 2    |         |           |  |
| 3    | 15 1055 | 16 2656   |  |
| 4    |         |           |  |
| 5    | 15 1053 |           |  |
| 6    | 15 1072 | 16 2655   |  |
| 7    |         |           |  |
| 8    | 11 9114 | 11 1567   |  |
| 9    | 05 0166 |           |  |
| 10   |         |           |  |
| 11   |         |           |  |
| 12   |         |           |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |                          |           |      |
|--------------------------------------------------------|--|--------------------------|-----------|------|
| Verdichter/Compressor/Compresseur                      |  | Danfoss                  | Aspera    |      |
| Typ/Type                                               |  | NLE9F                    | BK 1116 Z |      |
| Förderleistung/Delivery/Débit                          |  | l/h                      | 1503      | 1508 |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A                        | 10,5      | 6,3  |
| Widerstand/Resistance/Résistance                       |  | Ha/main/prin. $\Omega$   | 13,0      | 10,5 |
|                                                        |  | Hi/aux $\Omega$          | 17,6      | 13,9 |
| Temp.-Regler/Thermostat                                |  | Danfoss                  |           |      |
| Typ/Type                                               |  | 077B2157                 |           |      |
| Reglerstellung/Position                                |  | kalt warm                |           |      |
| Schaltwerte/Switching values/                          |  | „ein“ $^{\circ}\text{C}$ | -22 -14   |      |
| Valeurs de commutation                                 |  | „aus“                    | -32 -22   |      |
|                                                        |  | („abtauen“ od.) „alarm“  | -17,5 -10 |      |
| Füllmenge/Fill.quantity/Charge                         |  | R134a g                  | 200       |      |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W                        | 190       |      |
| Heizung/Heater/Chauffage                               |  |                          |           |      |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |           |      |
| Leistung/Power/Puissance                               |  | W                        |           |      |
| Ventilator/Blower/Ventilateur                          |  |                          |           |      |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 | 190       |      |
| Schaltuhr/Timer/Minuterie de contact                   |  |                          |           |      |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |           |      |
| Magnetventil/Magnetic valve/Electrovanne               |  |                          |           |      |
| Widerstand/Resistance/Résistance                       |  | $\Omega$                 |           |      |
| Spannung/Voltage/Tension                               |  | V                        |           |      |