



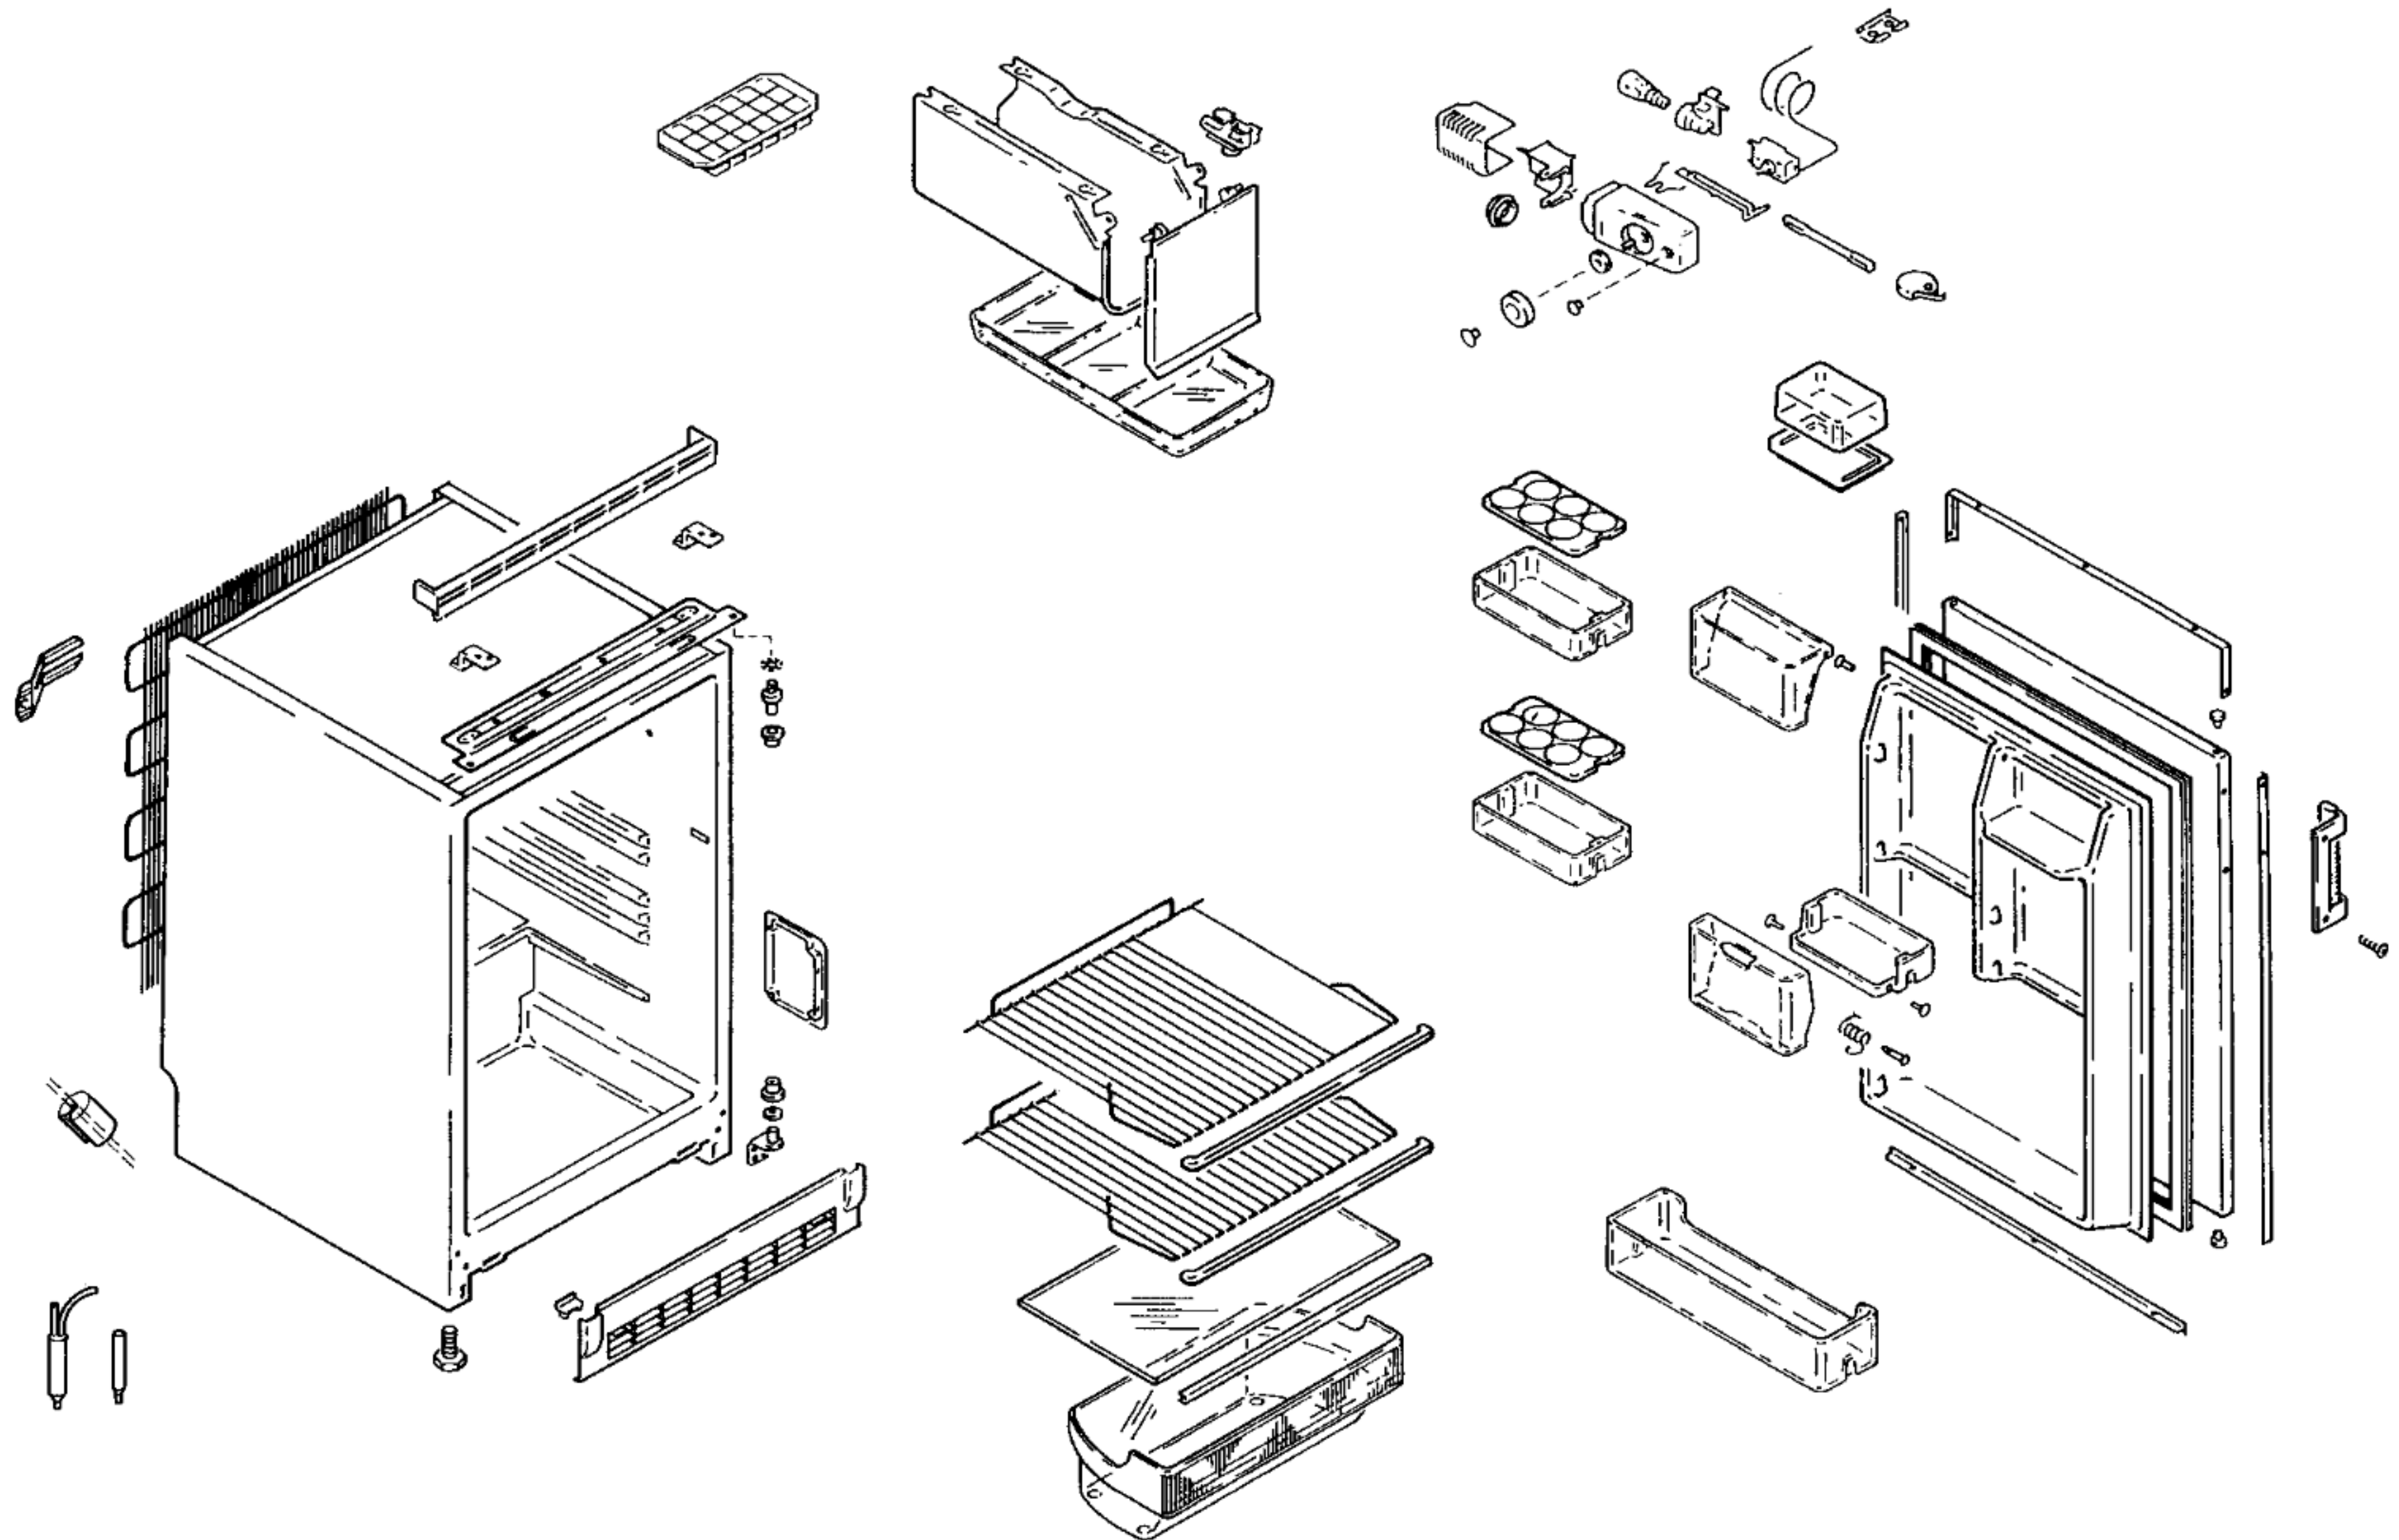

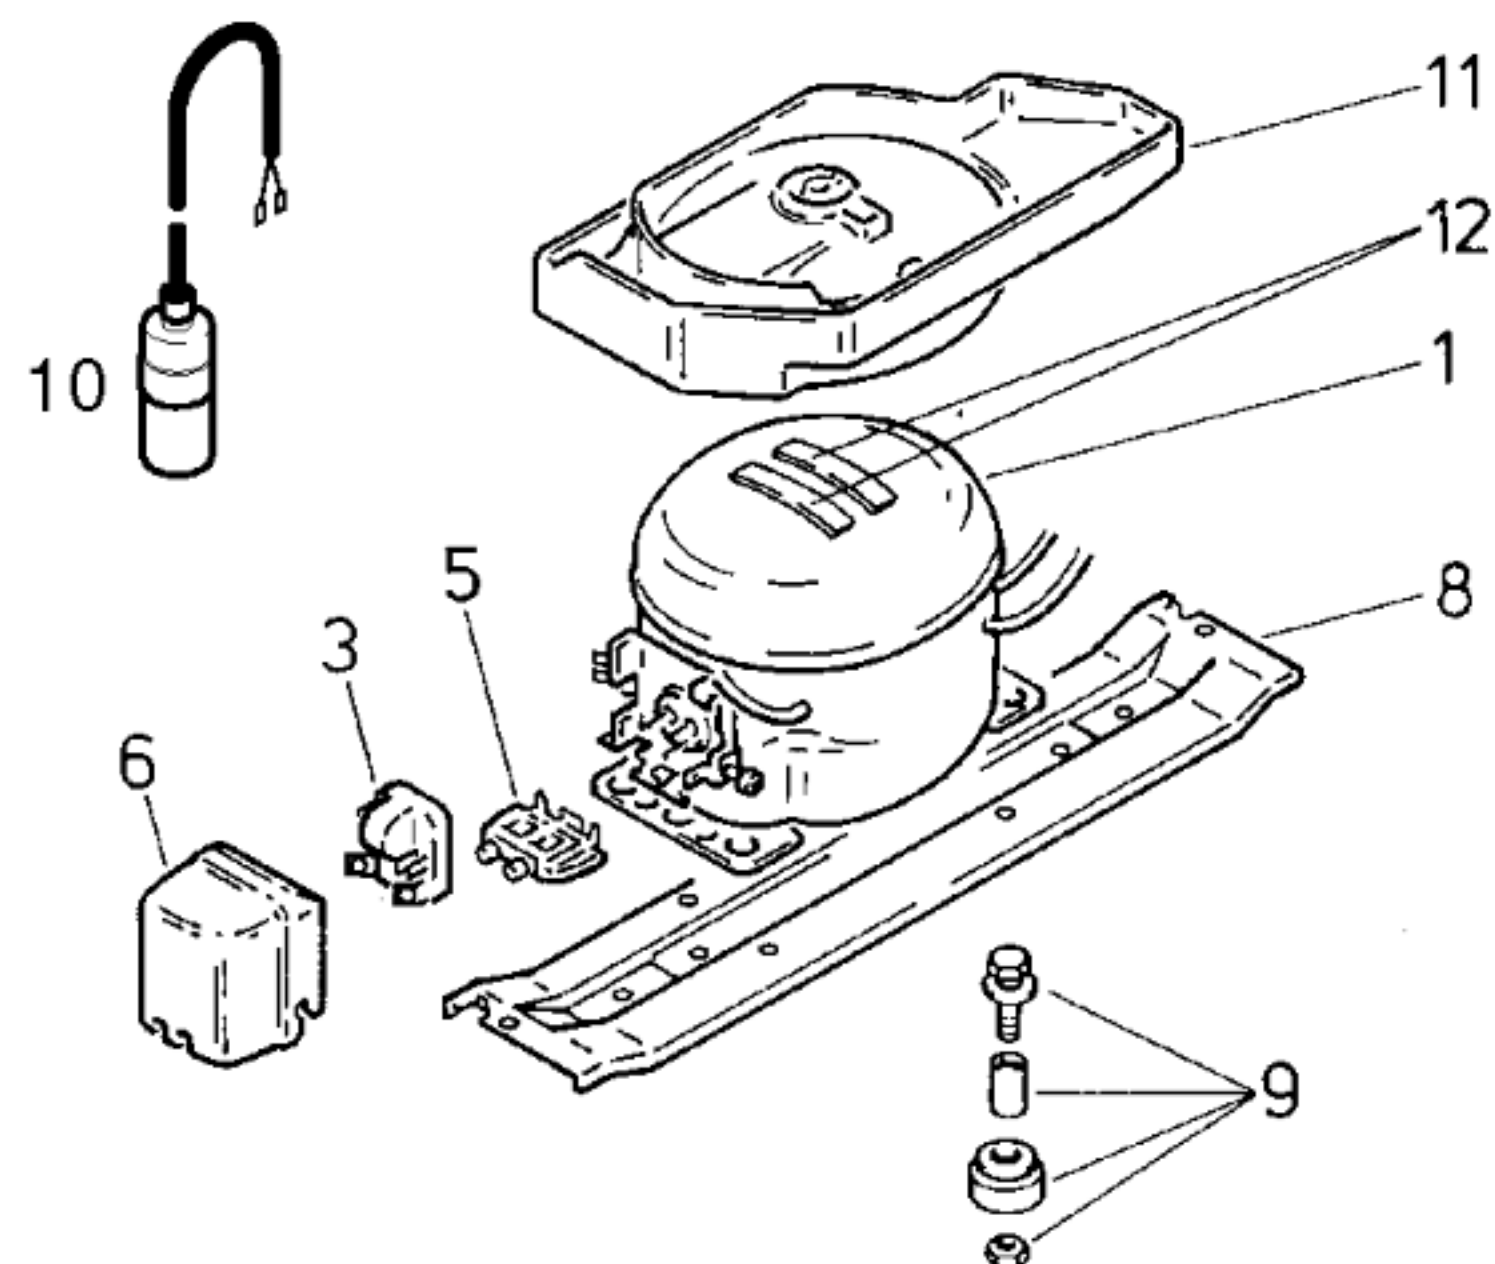

Pos.			
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Zanussi	
Typ/Type		TL 5 F	GL 45 AA	
Förderleistung/Delivery/Débit	l/h	914	828	
Anlaufstrom/Starting current/Cour de démarrage	A	9,0	8,3	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	15,5	21,8	
	Hi/aux Ω	16,8	24,1	
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		090 B		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-10,5	1,5	
Valeurs de commutation	„aus“	-22,5	-10,5	
(„abtauen“ od.)	„alarm“	+8,0	+8,0	
Füllmenge/Fill.quantity/Charge	R134a	g	42	42
Anschlußwert/Conn.load/Puiss. connectée	W	100		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			