



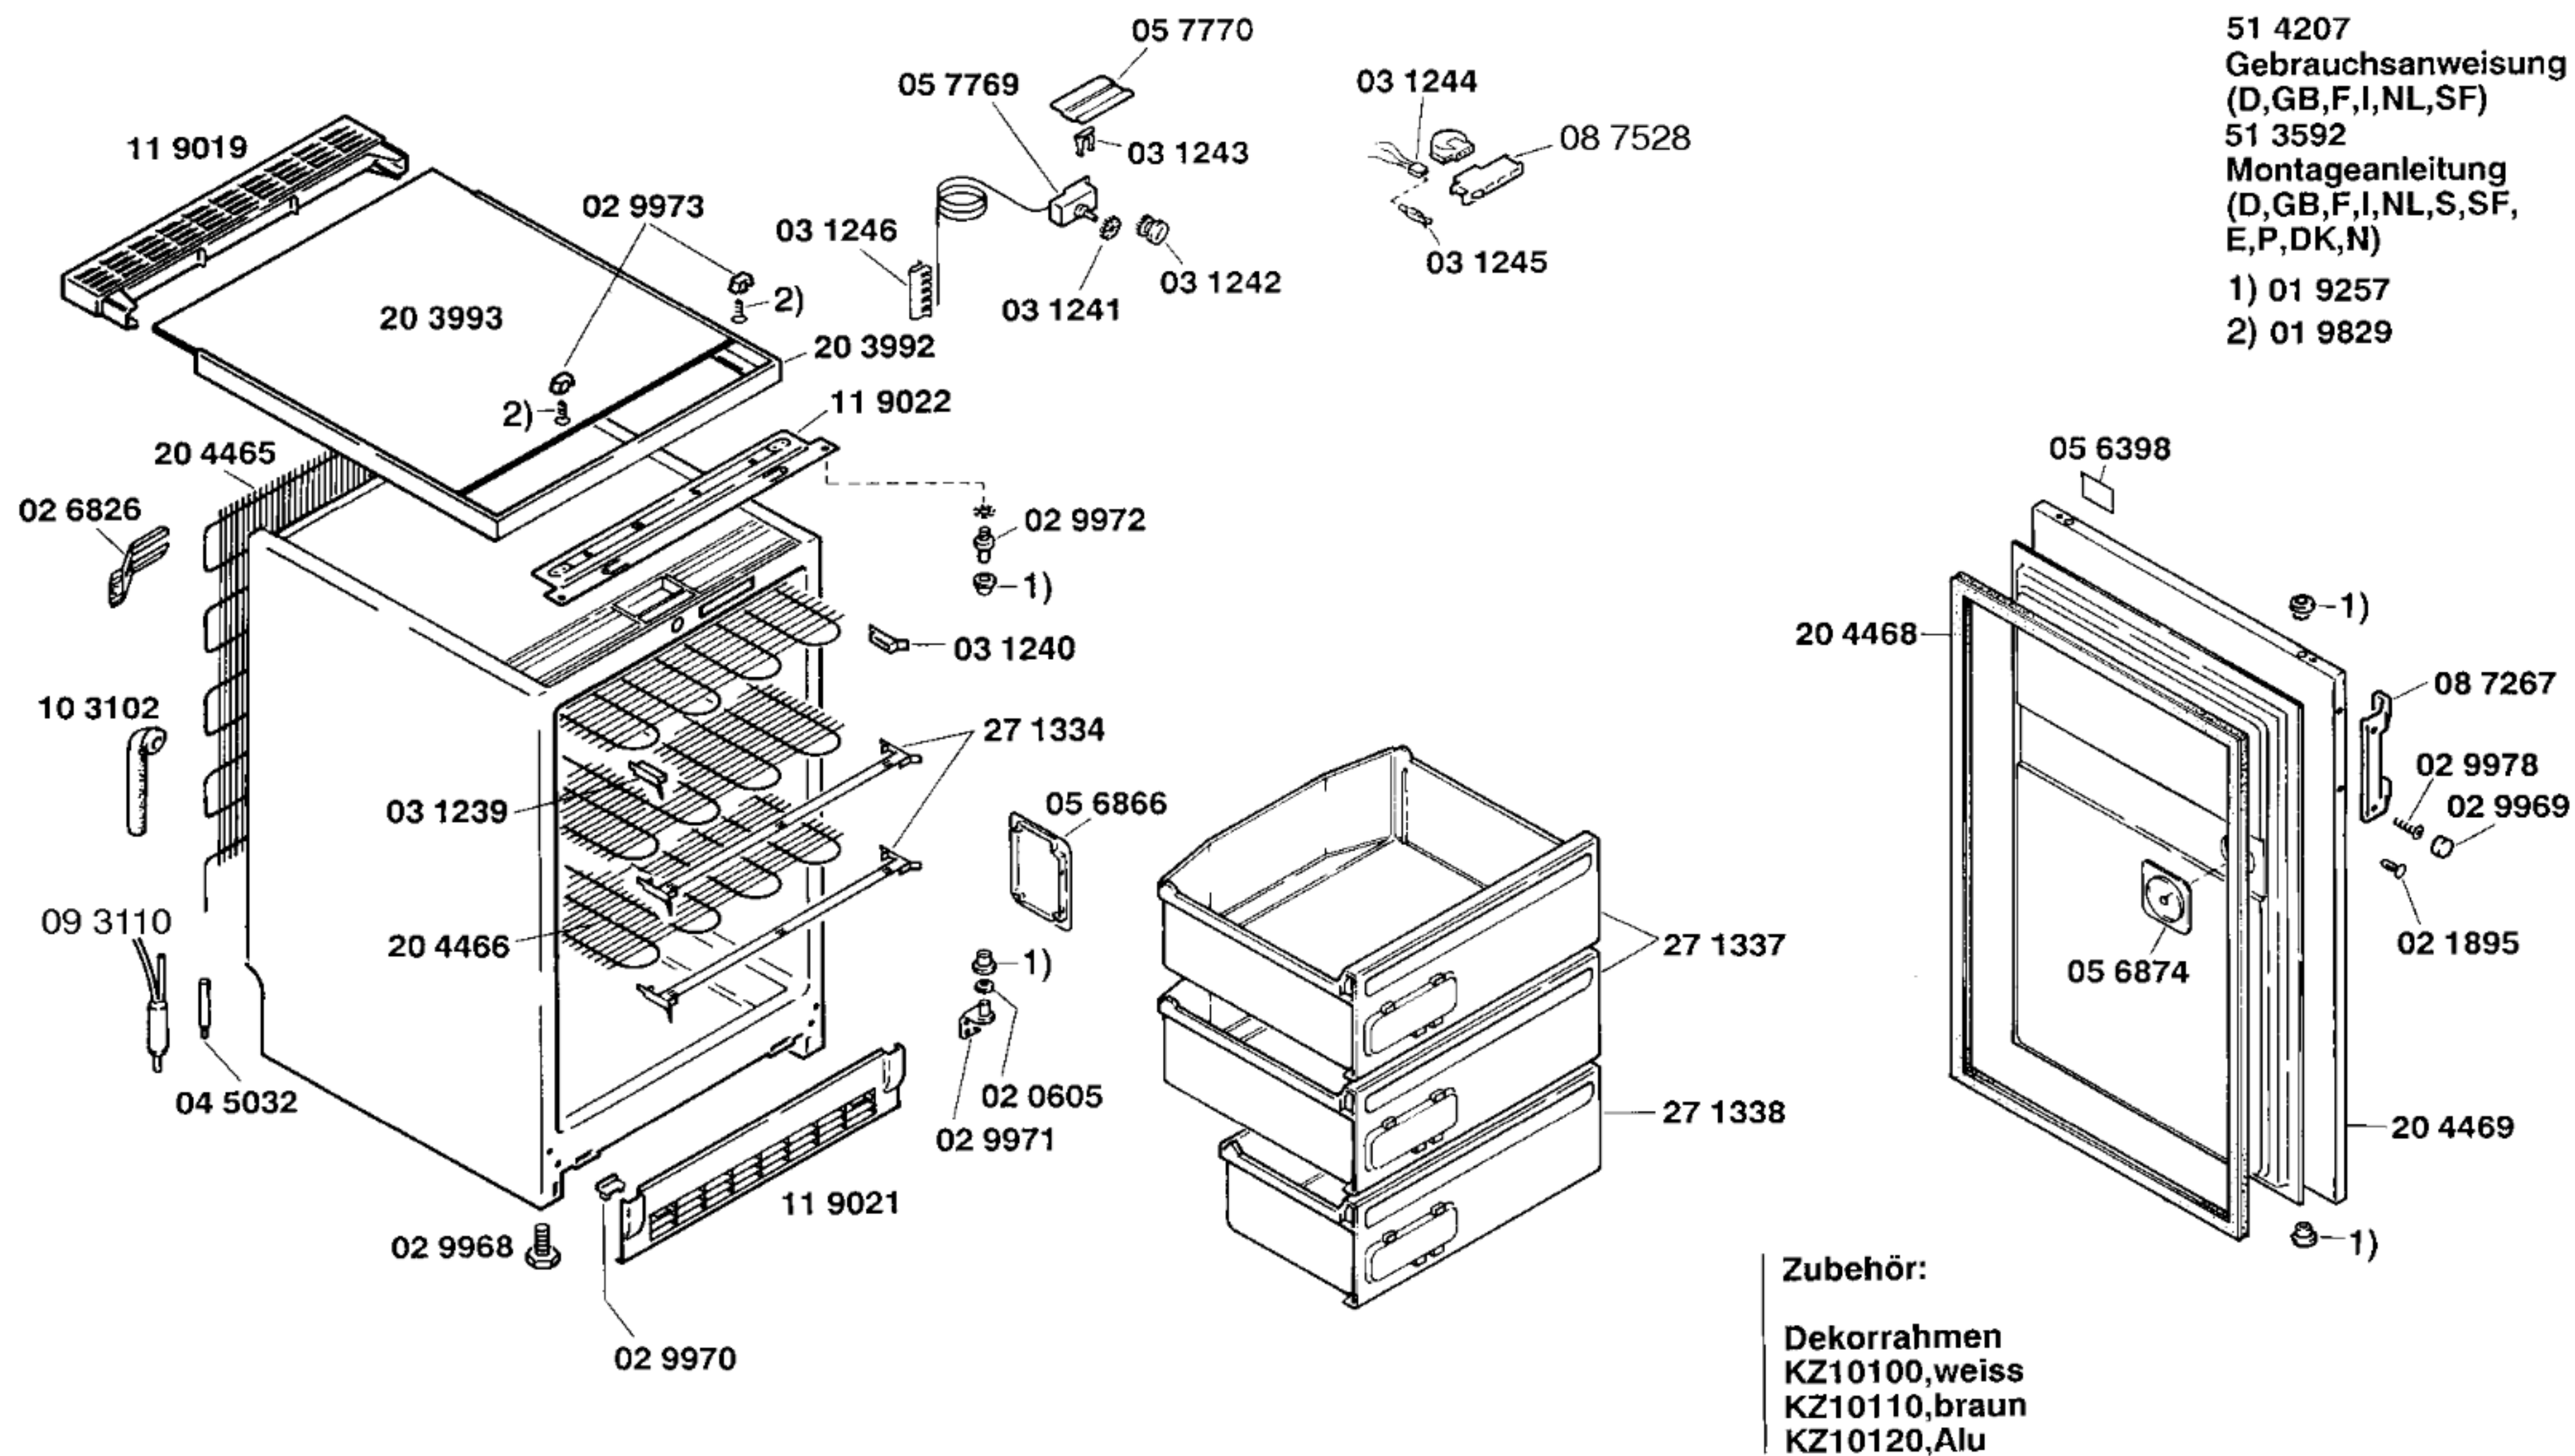

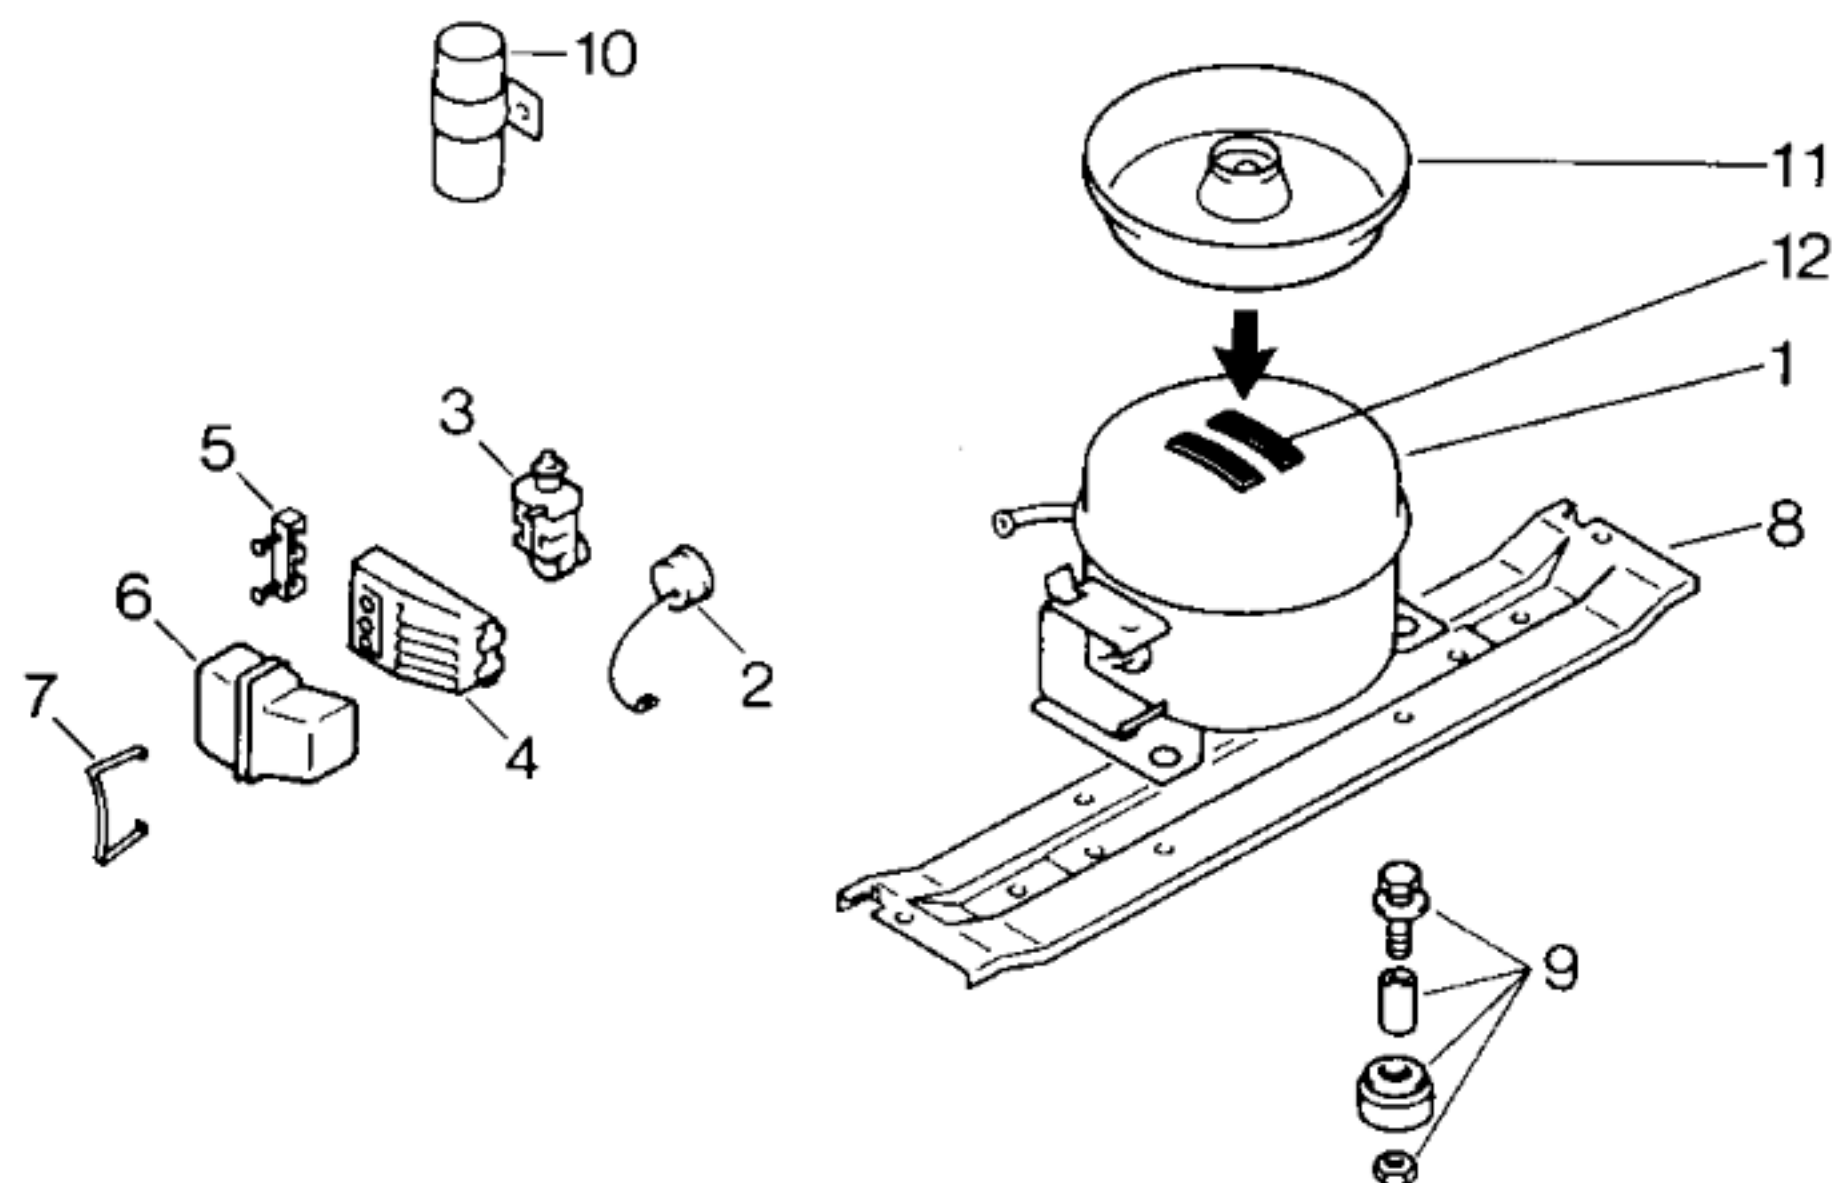

Pos.	EU1,CH1,SF1,F1	CH2,F2,EU2	
	Matsushita	Danfoss	
	S110LKAA	TL 5 A	
1	14 0559	14 0065	
2			
3	03 2034	05 9191	
4			
5		02 7310	
6	05 1413	05 1413	
7	02 6731		
8	27 0833	27 0833	
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Matsushita	Danfoss
Typ/Type		S110LKAA	TL 5 F
Förderleistung/Delivery/Débit	l/h	779	914
Anlaufstrom/Starting current/Cour de démarrage	A	6,5	8,9
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	18,1
	Hi/aux	Ω	35,1
Temp.-Regler/Thermostat		WHF	
Typ/Type		TF 57 SF2	
Reglerstellung/Position		kalt	warm
Schaltwerte/Switching values/	„ein“	°C	-25
Valeurs de commutation	„aus“		-17
(„abtauen“ od.)	„alarm“		-33
			-23
			-19,5
			-13
Füllmenge/Fill.quantity/Charge	R12	g	170
Anschlußwert/Conn.load/Puiss. connectée	W	120	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		