


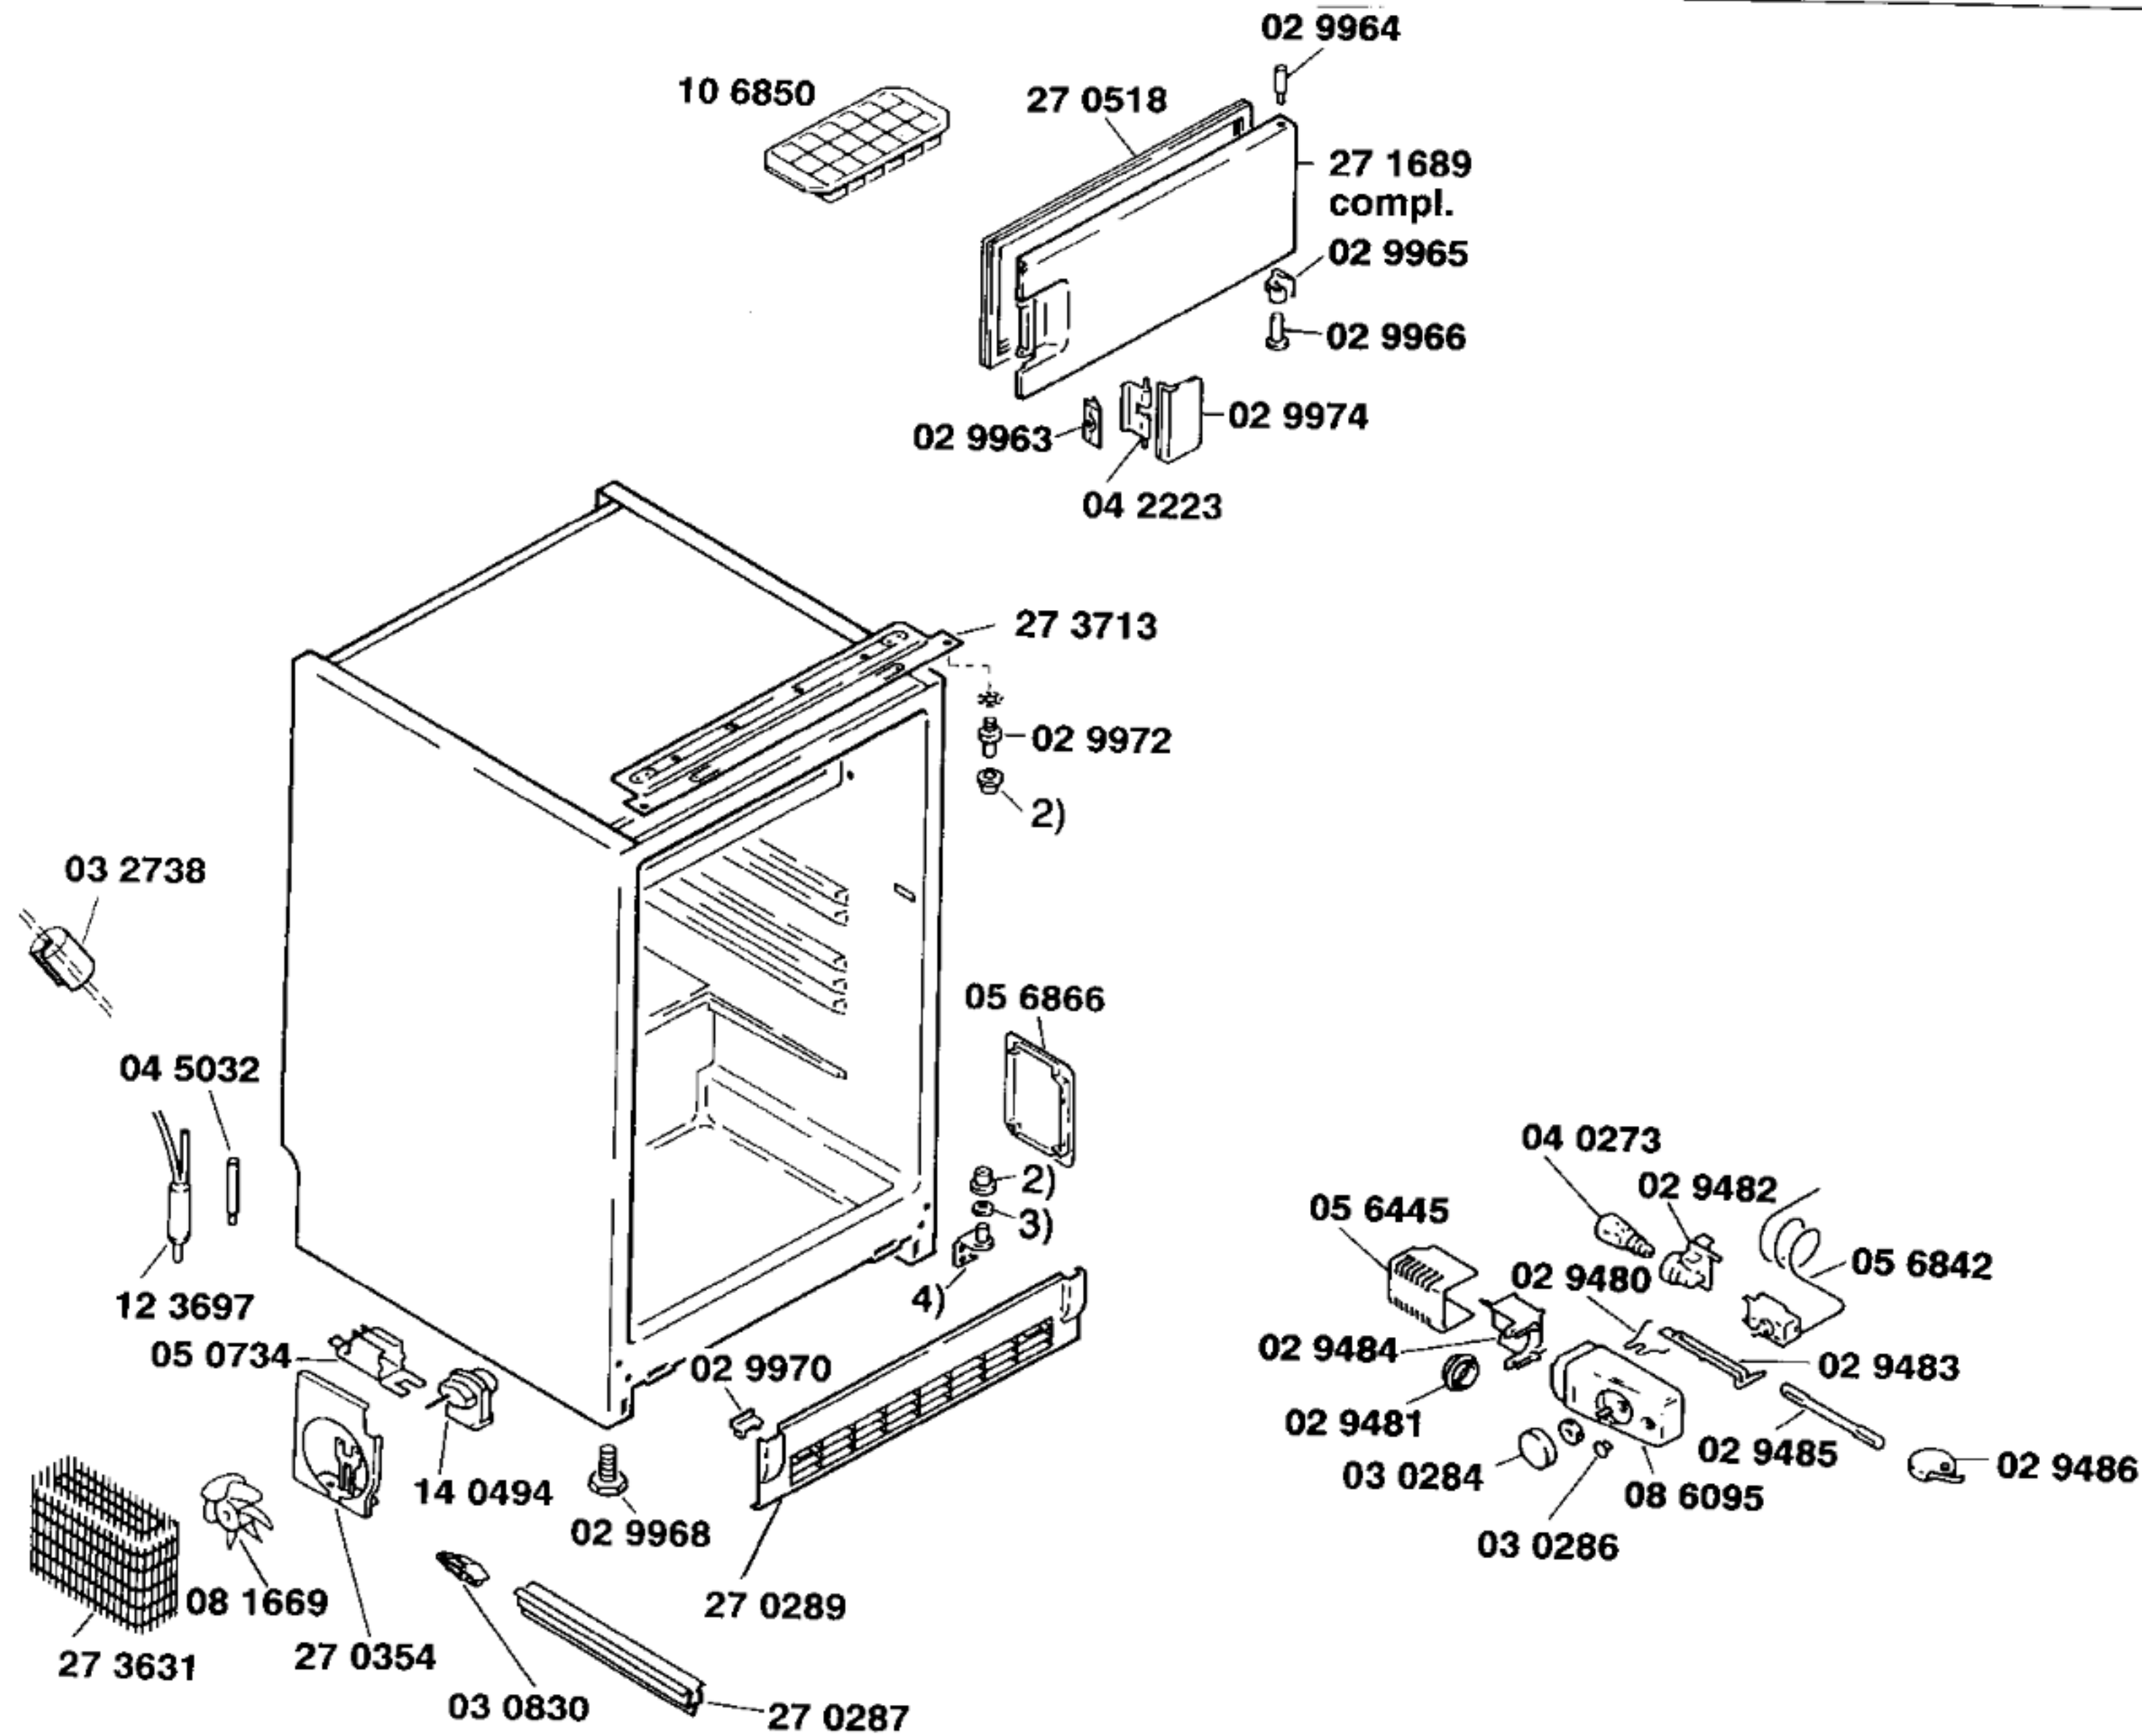

51 4331
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)


51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)


2) 01 9257
3) 02 0605
4) 02 9971

Zubehör:

Dekorrahmen
Z4110A1,Alu
Z4110W1,weiss

Sockel
Z4510X0

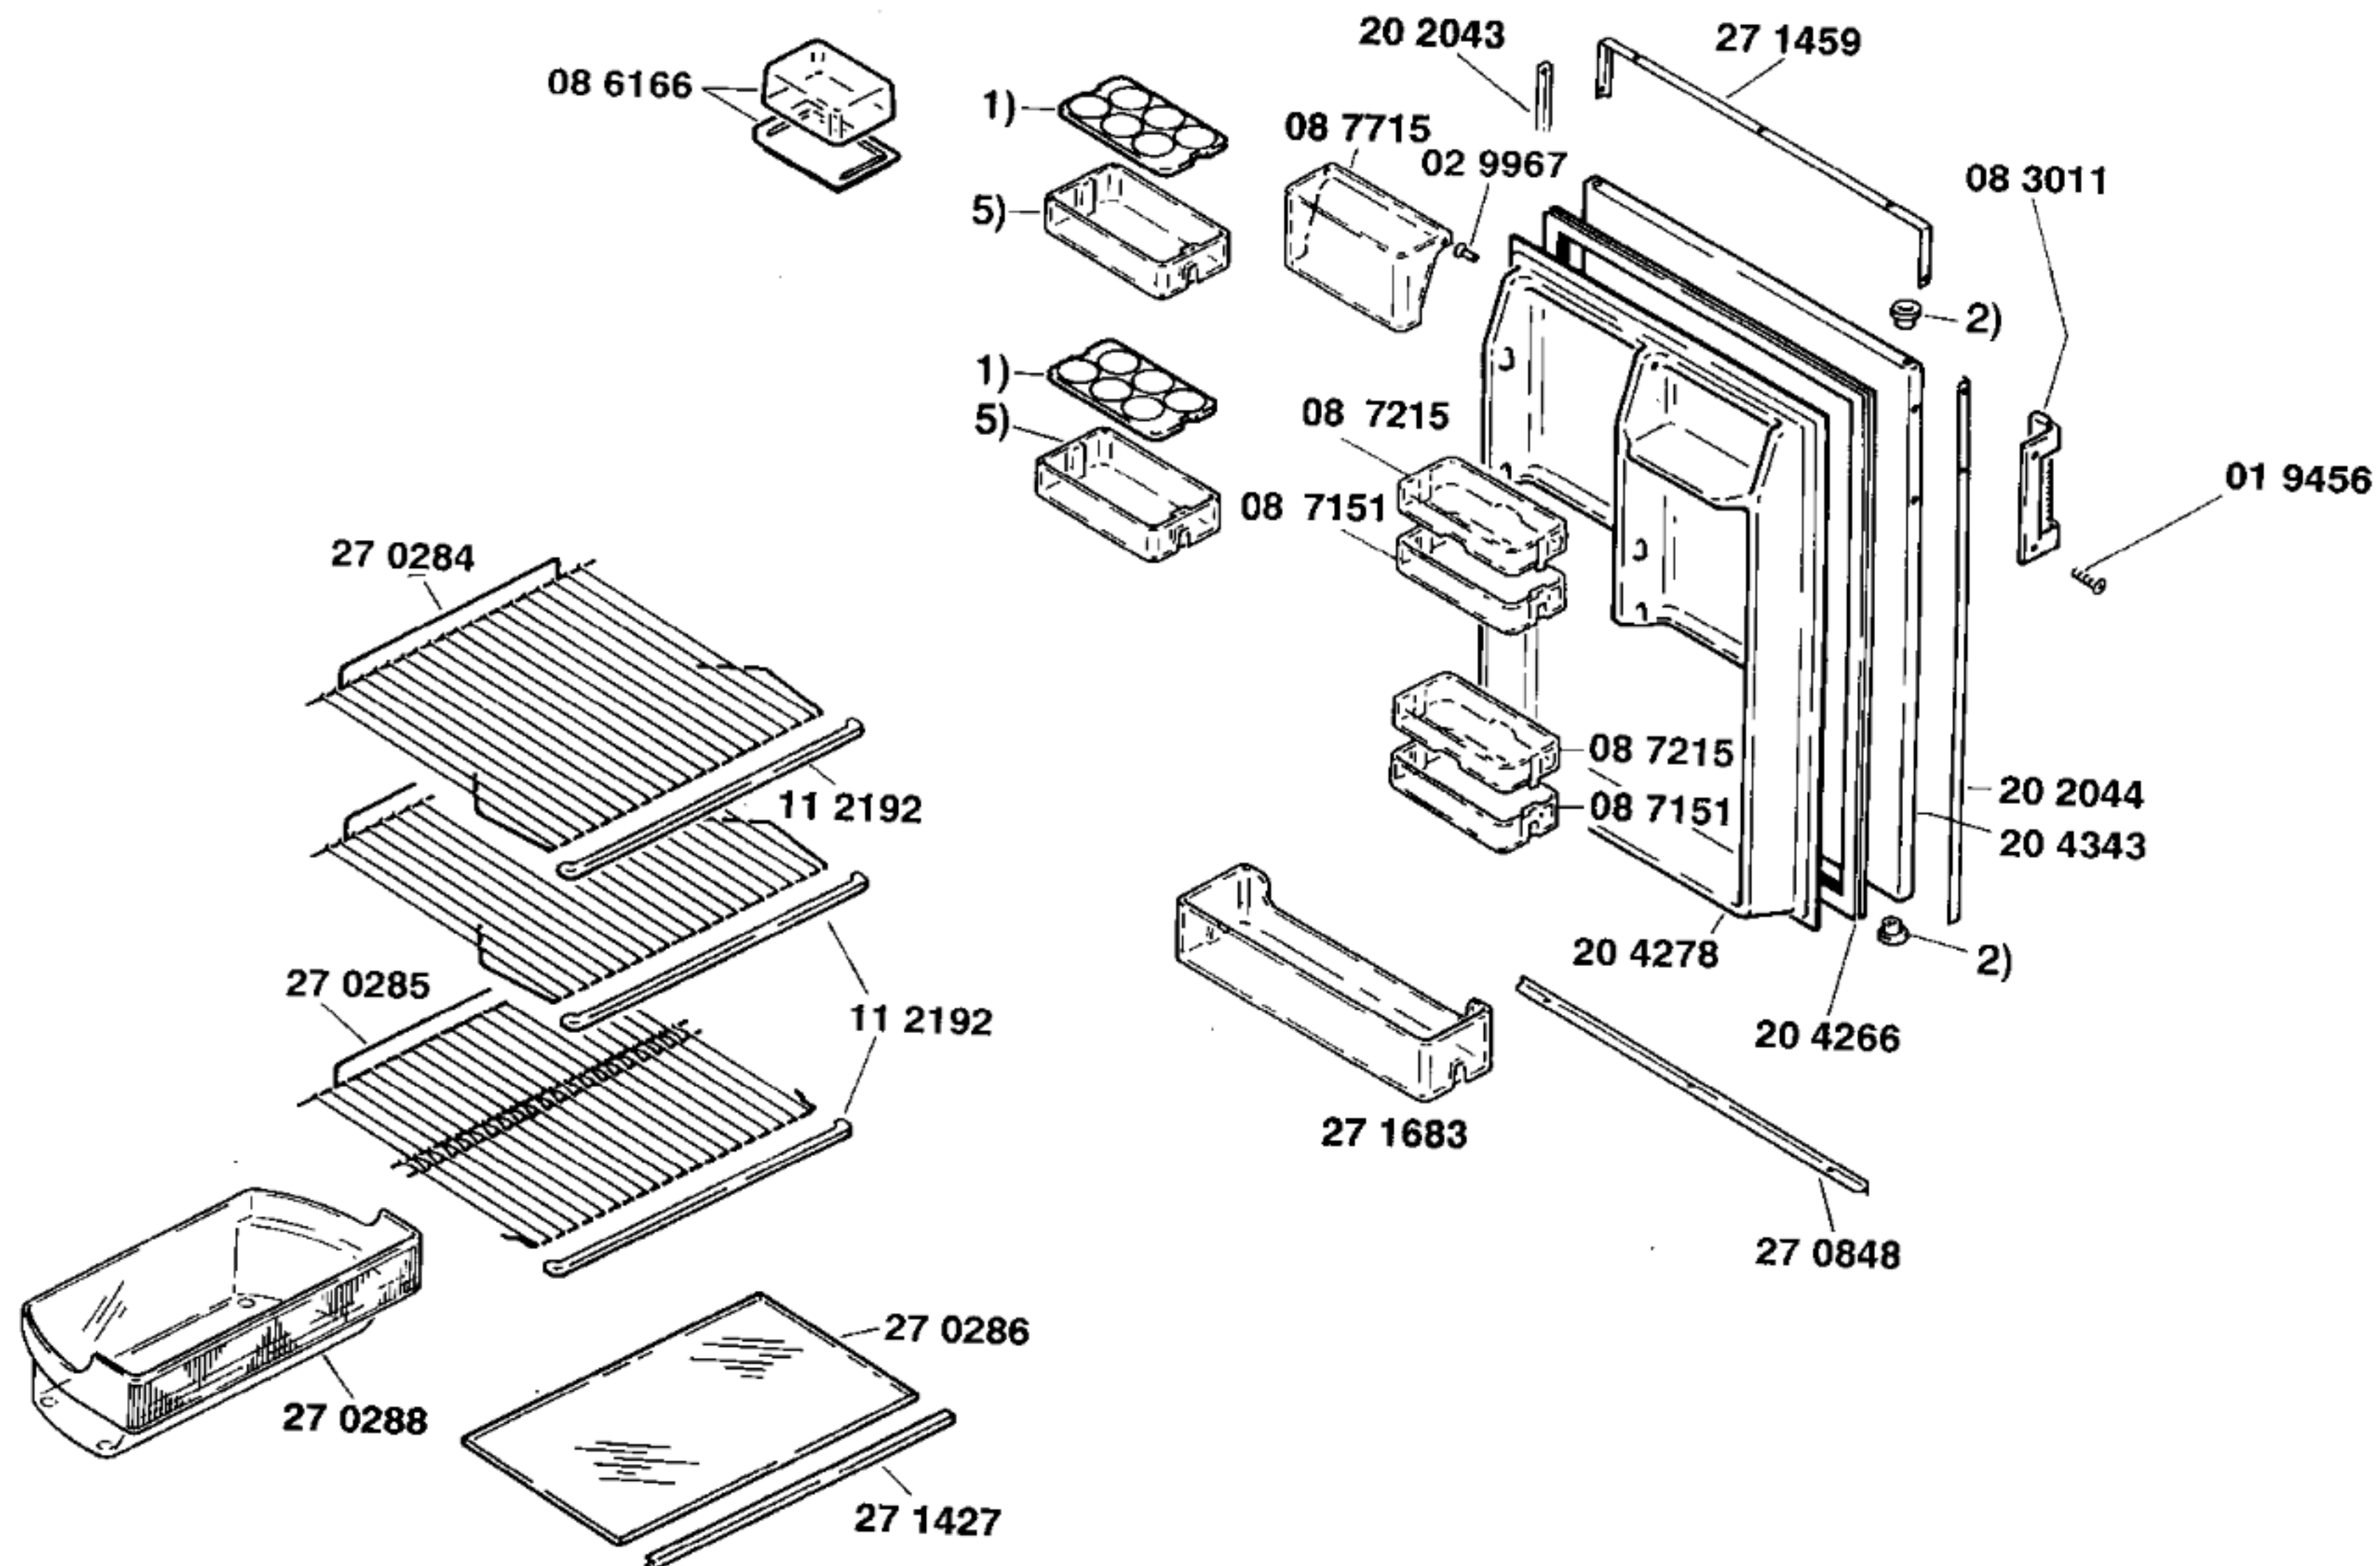

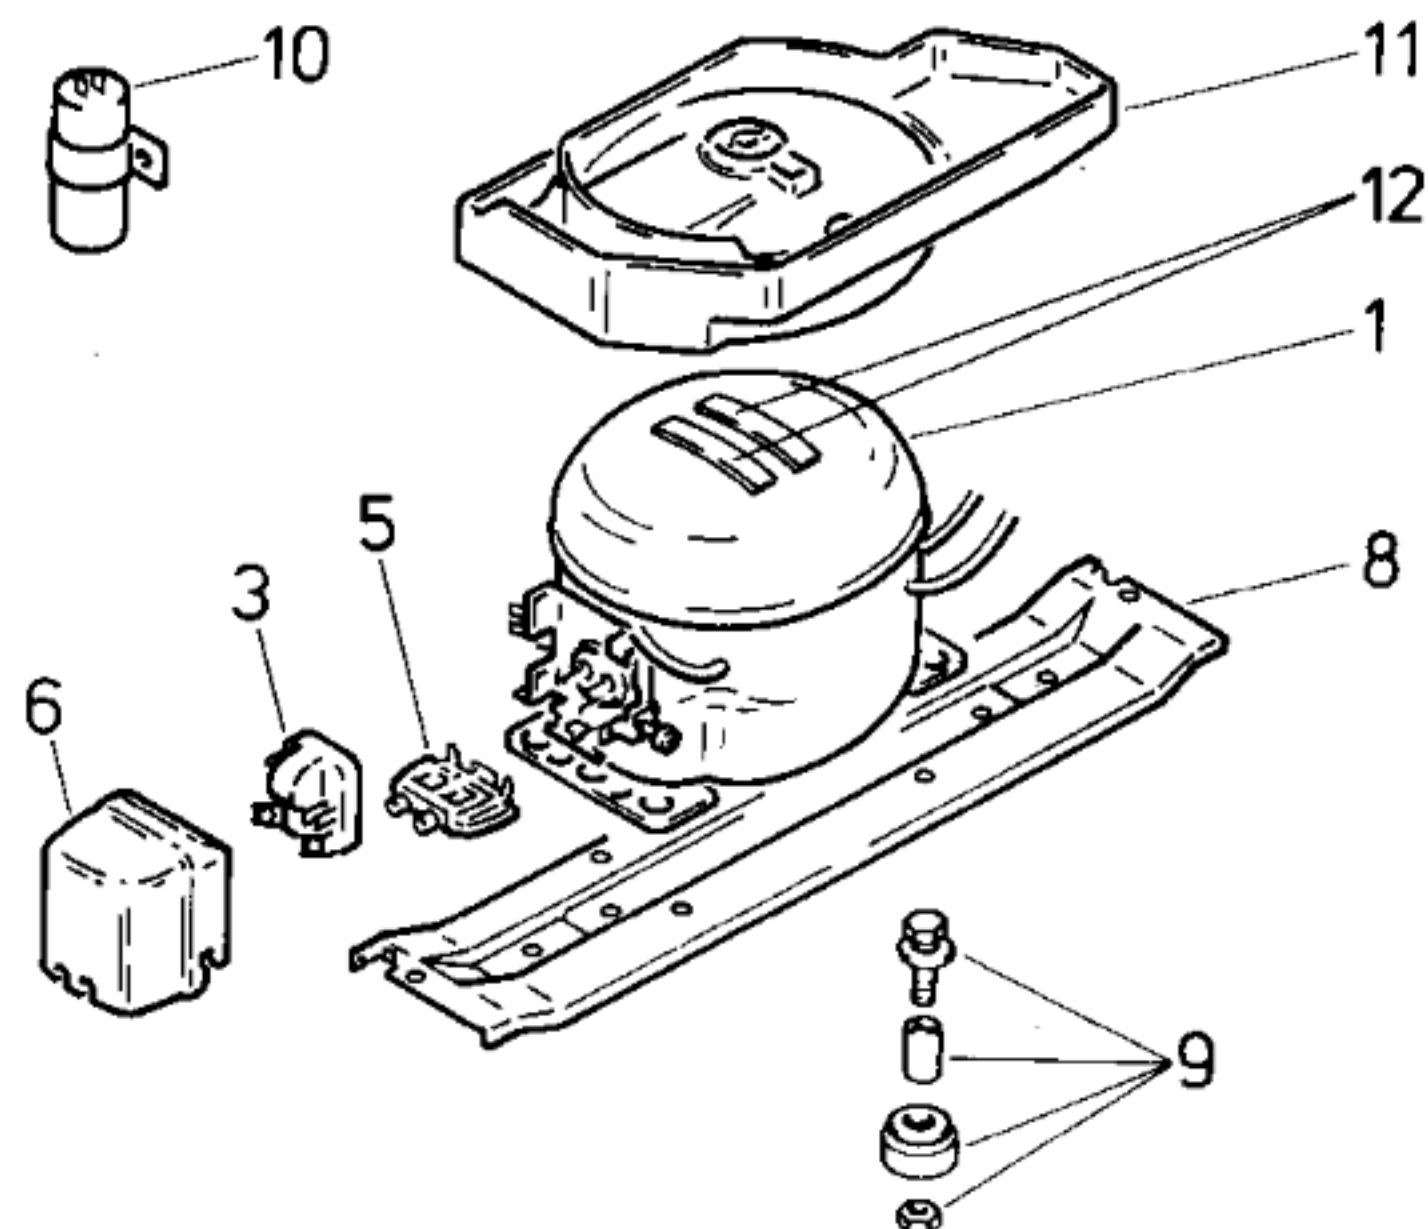

Pos.	F1,GB1	F2,GB2	
	Danfoss	Matsushita	
	TL 4A	S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		TL 4 A	S075LKAA	
Förderleistung/Delivery/Débit		695 l/h	641	
Anlaufstrom/Starting current/Cour. de démarrage		8,3 A	5,7	
Widerstand/Resistance/Résistance		Ha/main/prin. 23,4 Ω	24,4	
		Hi/aux 15,5 Ω	39,8	
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		+ 4,5 + 4,5 °C		
Valeurs de commutation		„ein“ „aus“		
		(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge		R12 g	130	
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		