


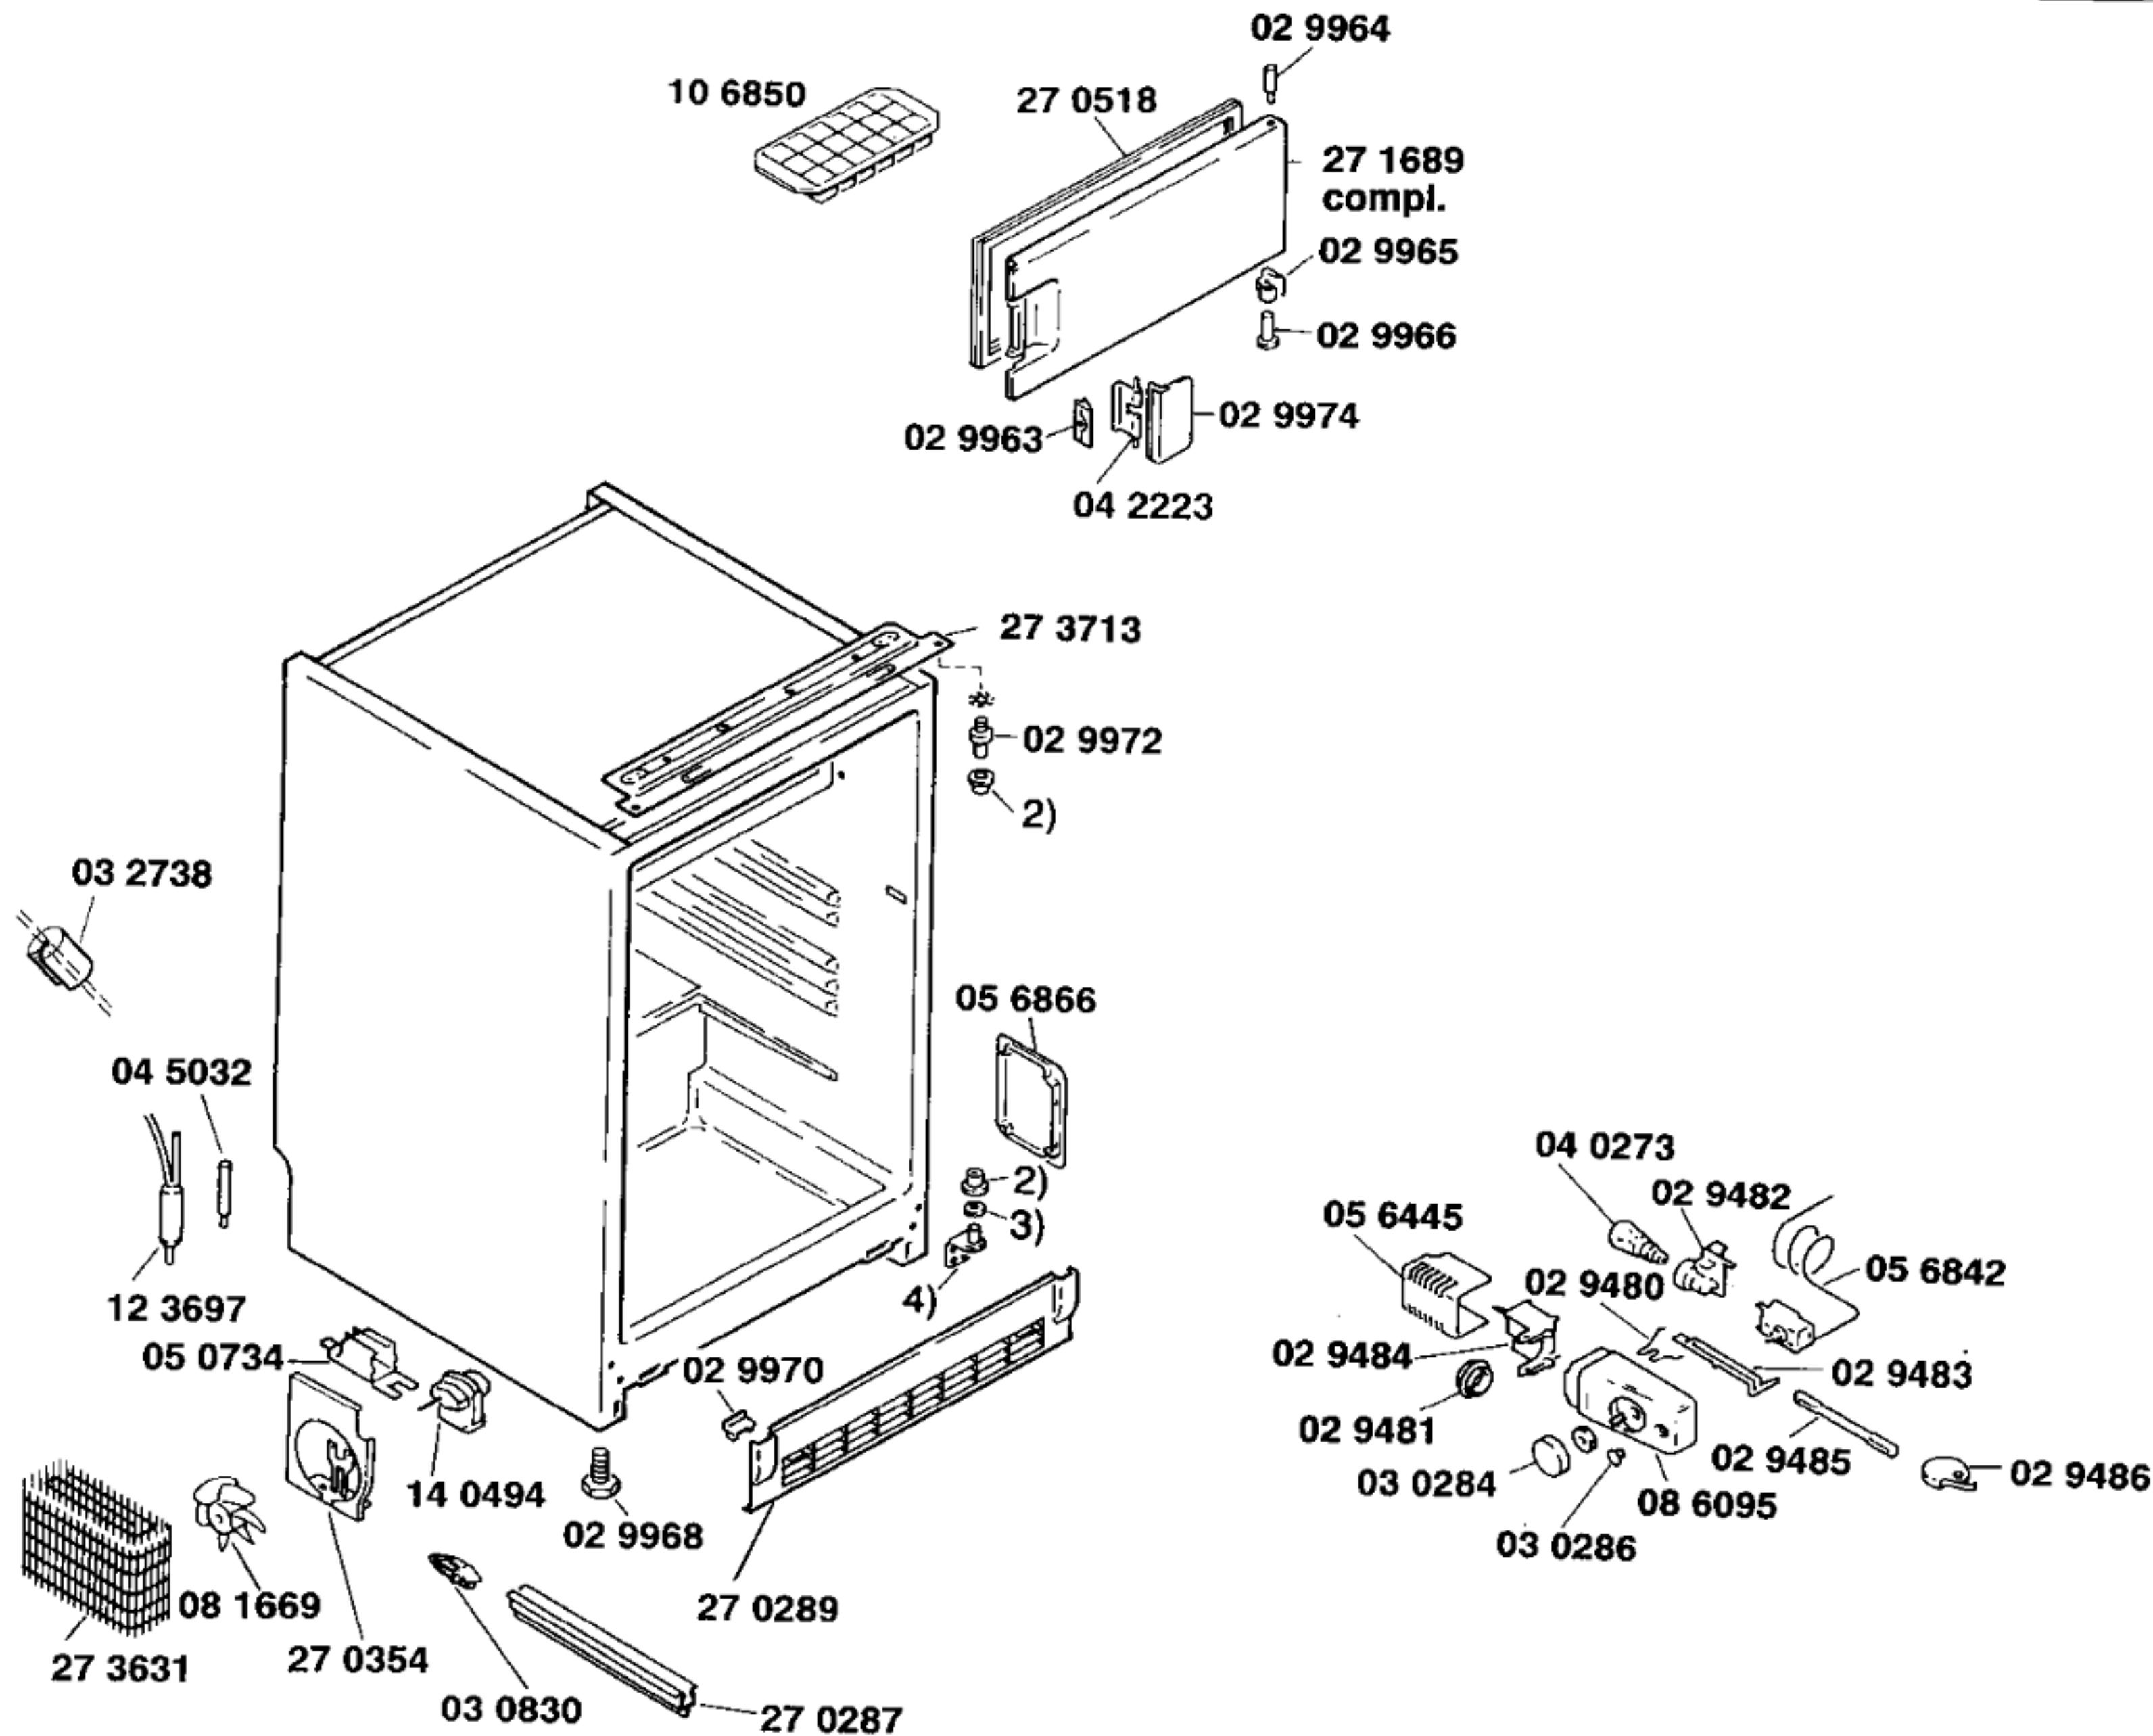

51 4331
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

2) 01 9257


3) 02 0605


4) 02 9971

Zubehör:

Dekorrahmen
Z4110A1,Alu
Z4110W1,weiss

Sockel
Z4510X0

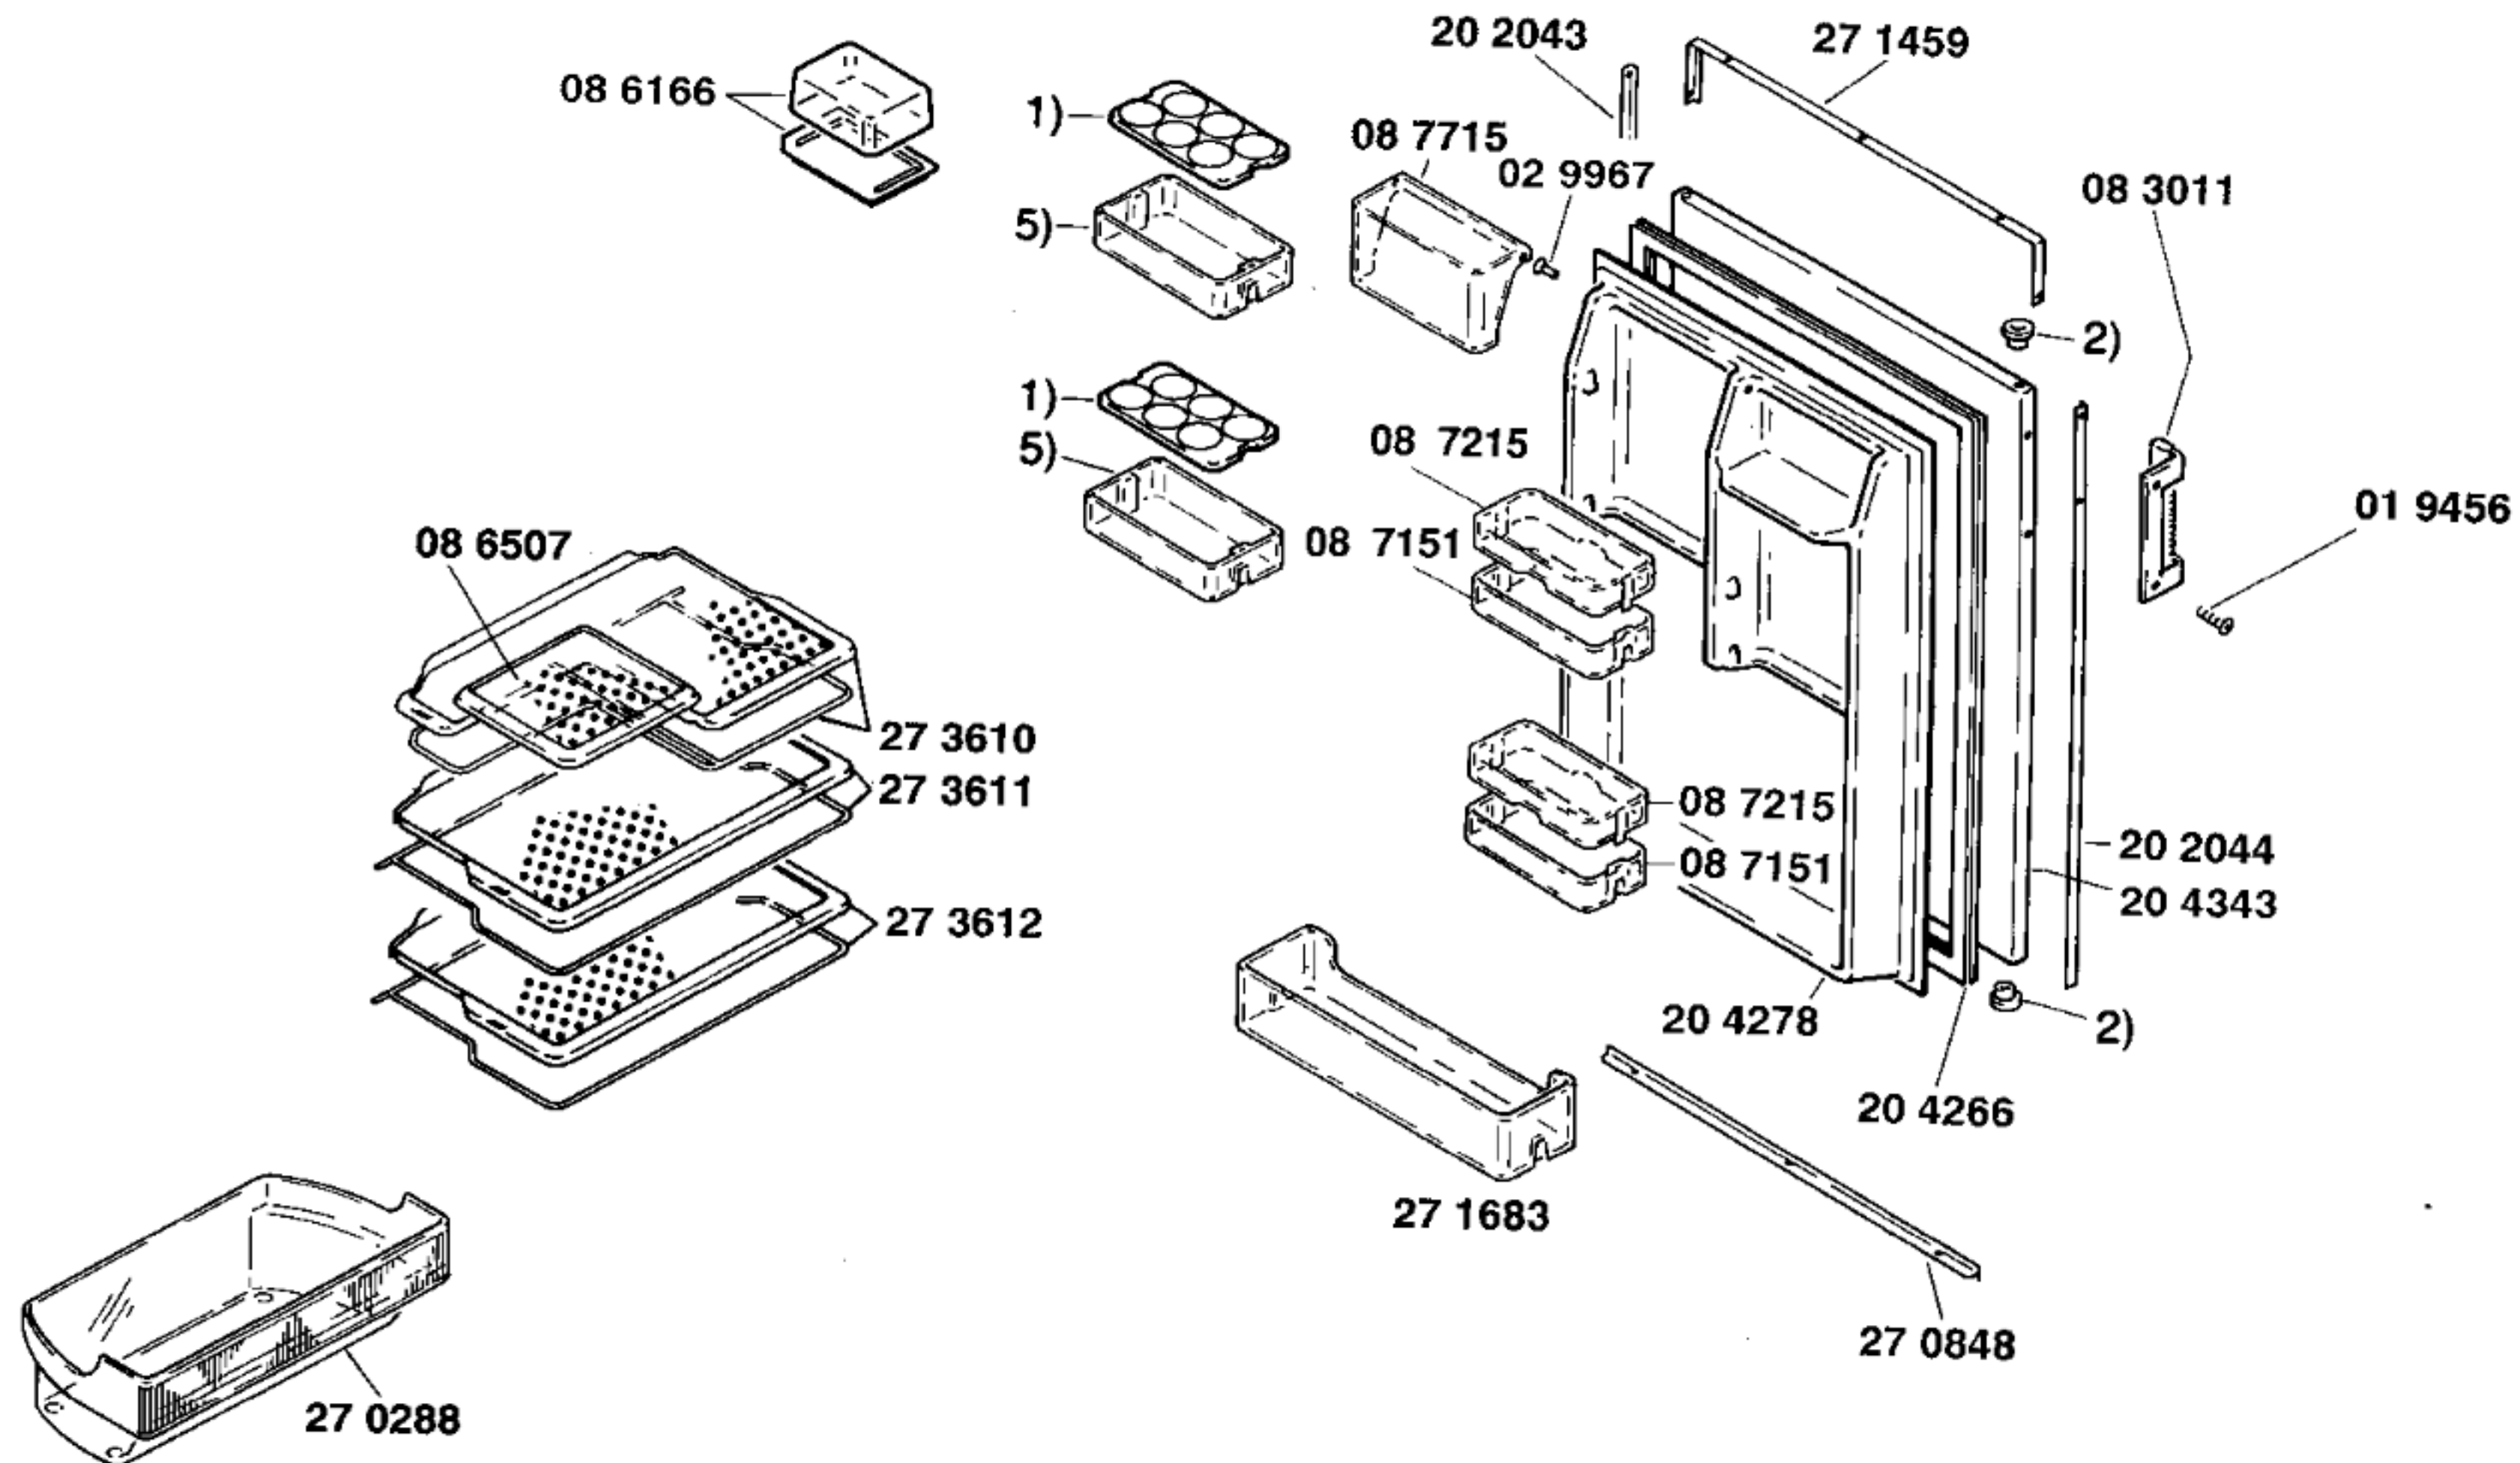

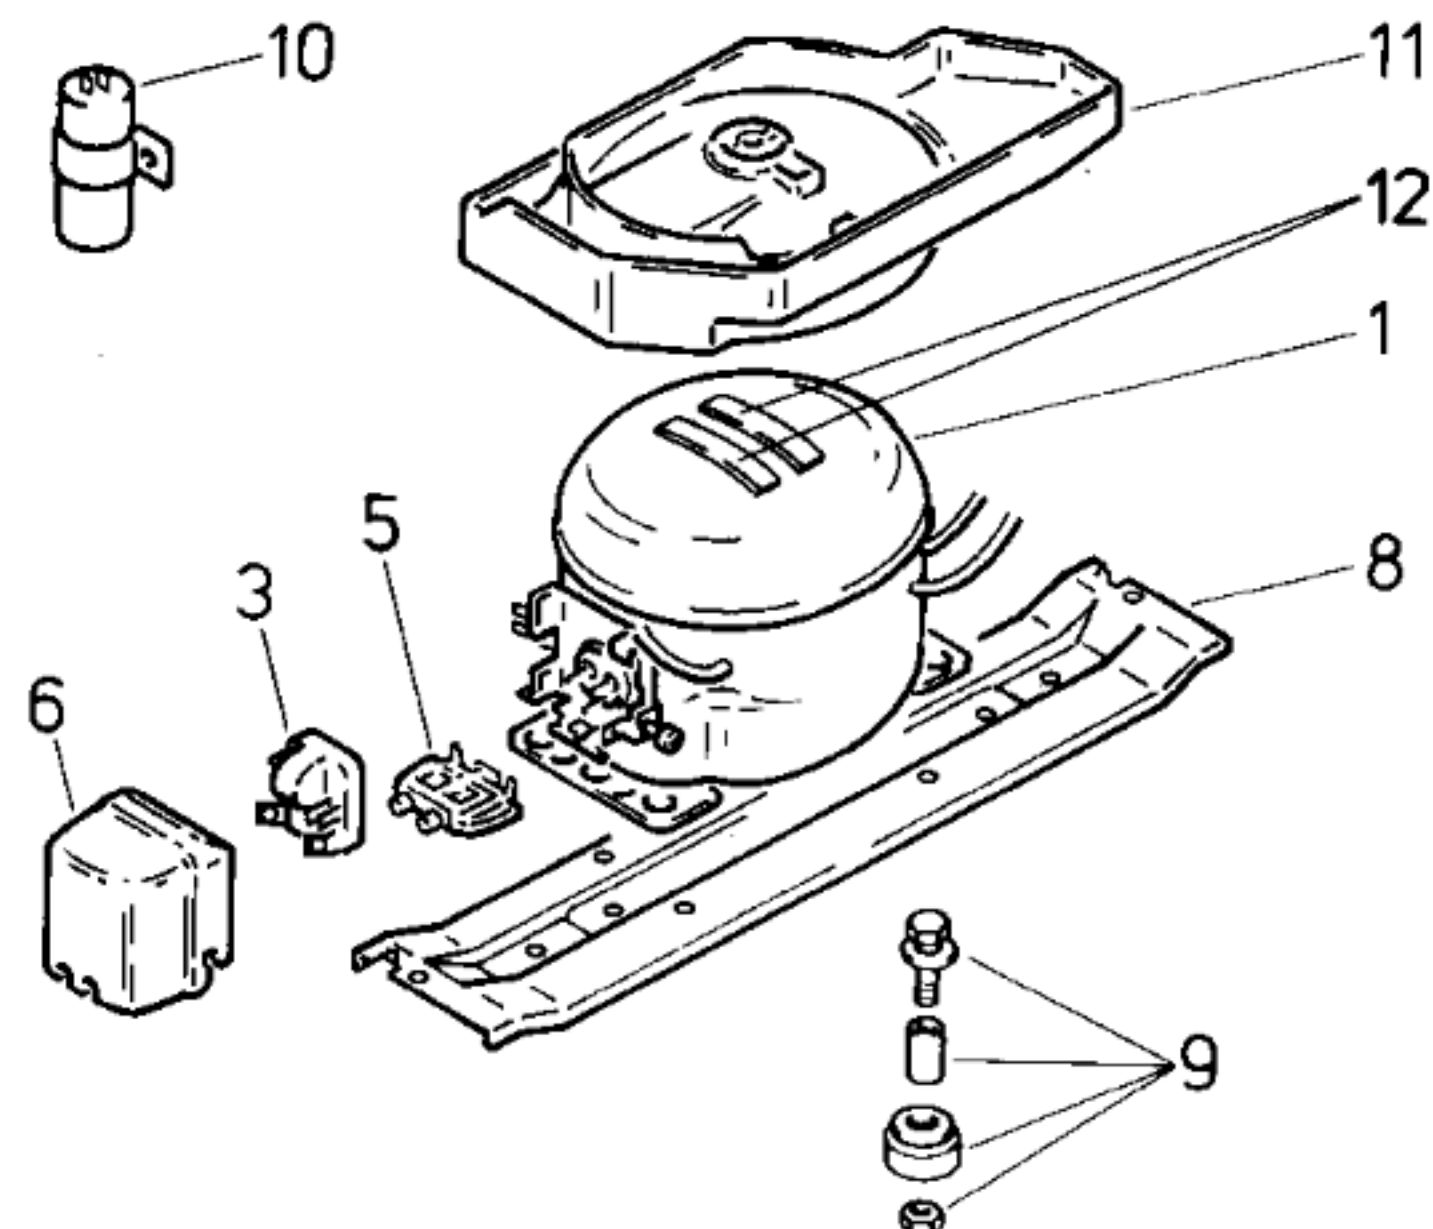

Pos.	EU1	EU2	
	Danfoss TL 4A	Matsushita S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss		Matsushita	
Typ/Type		TL 4 A		S075LKAA	
Förderleistung/Delivery/Débit		695		641	
Anlaufstrom/Starting current/Cour. de démarrage		A		5,7	
Widerstand/Resistance/Résistance		Ha/main/prin.		24,4	
		Hi/aux		39,8	
Temp.-Regler/Thermostat		Ranco			
Typ/Type		K 59			
Reglerstellung/Position		kalt		warm	
Schaltwerte/Switching values/		+ 4,5		+ 4,5	
Valeurs de commutation		- 31,0		- 13,5	
(„abtauen“ od.)		„alarm“			
Füllmenge/Fill.quantity/Charge		R12	g	130	
Anschlußwert/Conn.load/Puiss. connectée			W	110	
Heizung/Heater/Chauffage					
Widerstand/Resistance/Resistance			Ω		
Leistung/Power/Puissance			W		
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance			Ω		
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance			Ω		
Spannung/Voltage/Tension			V		