





07 4445
V01,V03,V05,V06
09 6325
V02,V04,V07,V08

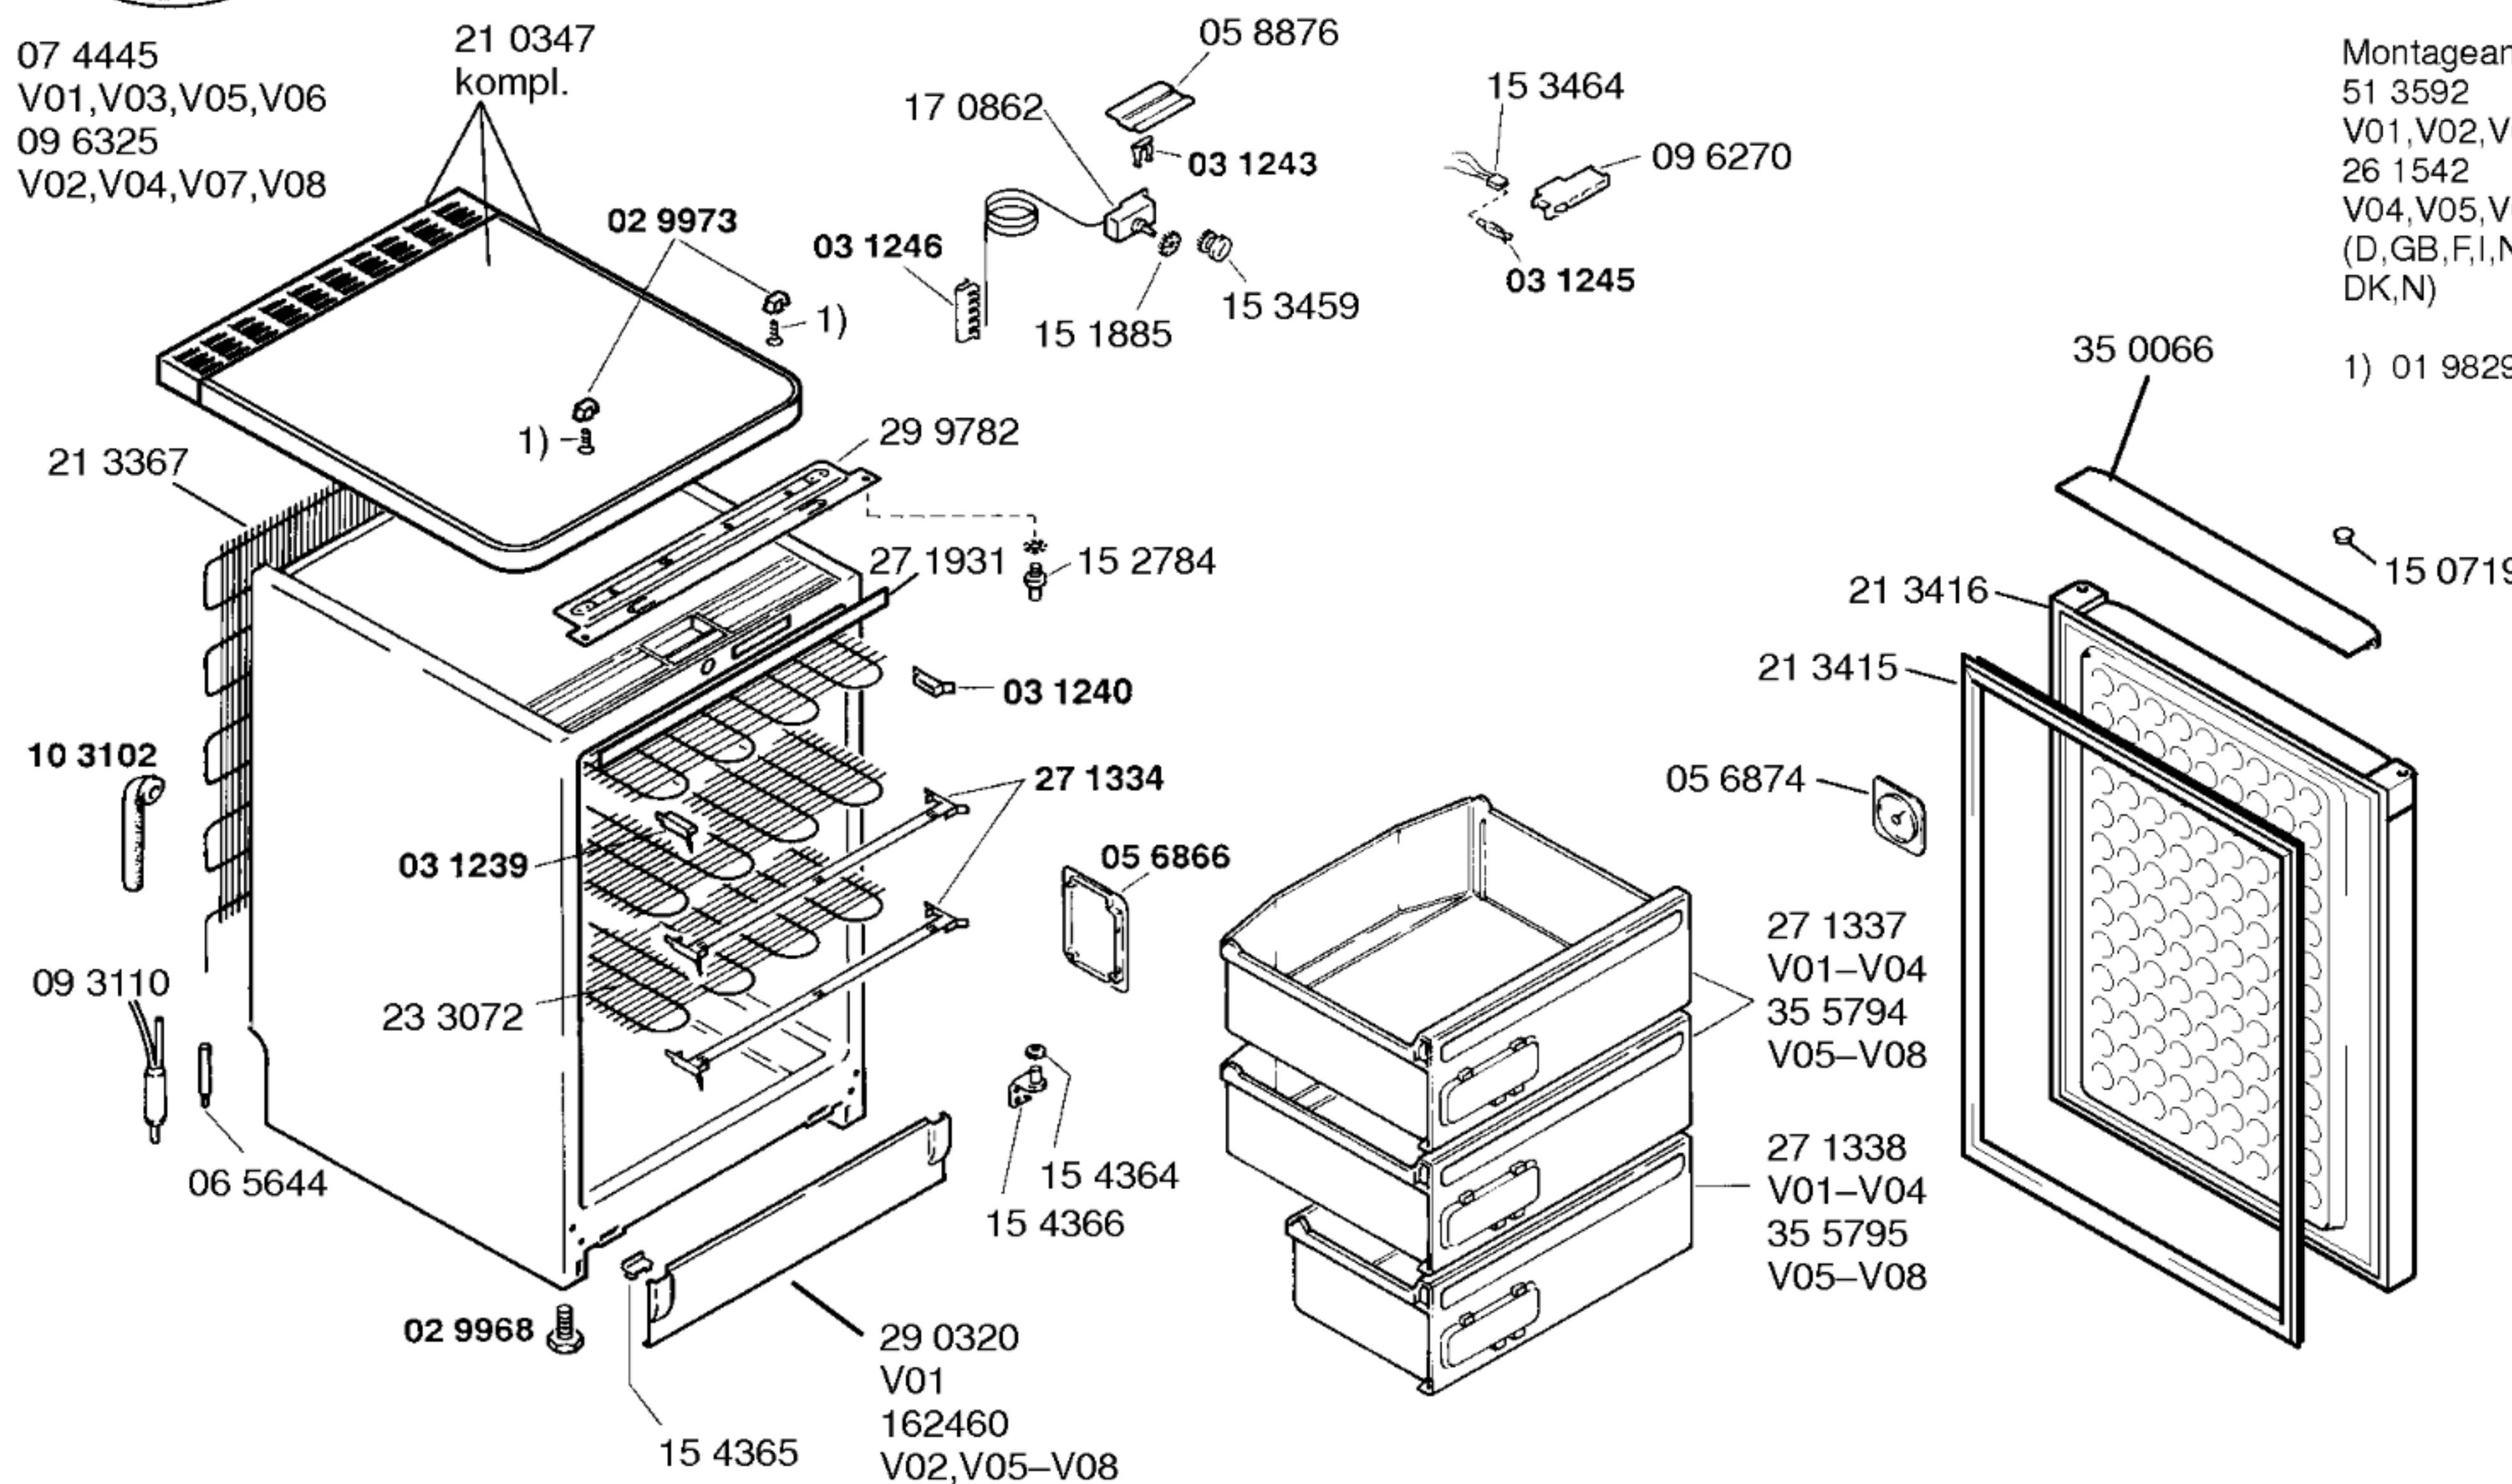

Gebrauchsanweisung
51 7998
(D,GB,F,I,NL,SF)

Montageanweisung
51 3592
V01,V02,V03
26 1542
V04,V05,V06
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

1) 01 9829

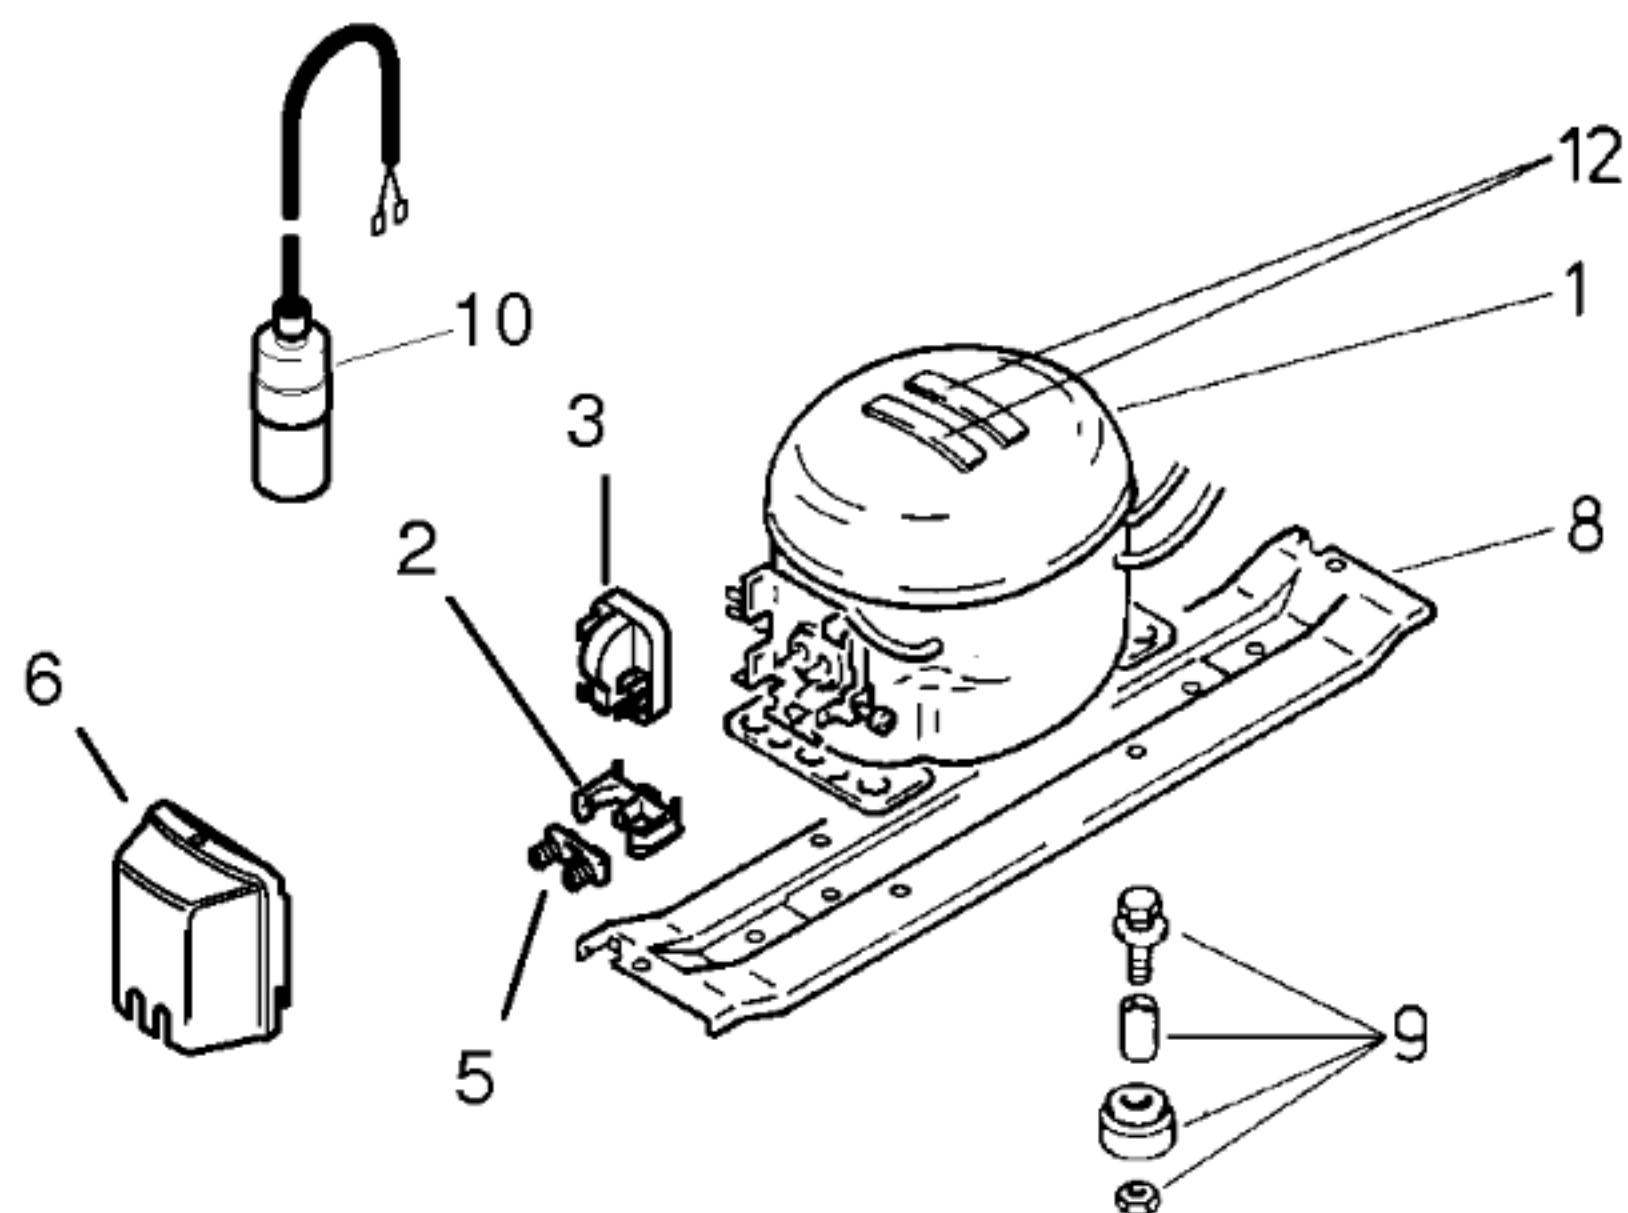

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TLY 6 K	Aspera	
Förderleistung/Delivery/Débit	l/h	1026	EMT 32 CLP	
Anlaufstrom/Starting current/Cour de démarrage	A		1073	
Widerstand/Resistance/Résistance	Ω		3,5	
	Hi/main/prin.		28,4	
	Hi/aux		24,7	
Temp.-Regler/Thermostat		Ranco		
Typ/Type		kalt	warm	
Reglerstellung/Position	°C	-25	-17	
Schaltwerte/Switching values/	„ein“	-33	-23	
Valeurs de commutation	„aus“	-19,5	-13	
	(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge	R600a	g	*	
Anschlußwert/Conn.load/Puiss. connectée	W	78	68	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

* siehe Typenschild

	V01,V02,V05,V07	V03,V04,V06,V08	
Pos.	Danfoss	Aspera	
	TLY 6 K	EMT 32 CLP	
1	14 1680	14 1838	
2	15 1053		
3	15 1055	17 0880	
5	15 0760	17 0882	
6	15 1072	17 0881	
7			
8	27 1375	27 1375	
9	05 0166	05 0166	
10	05 9467		
11			
12			