

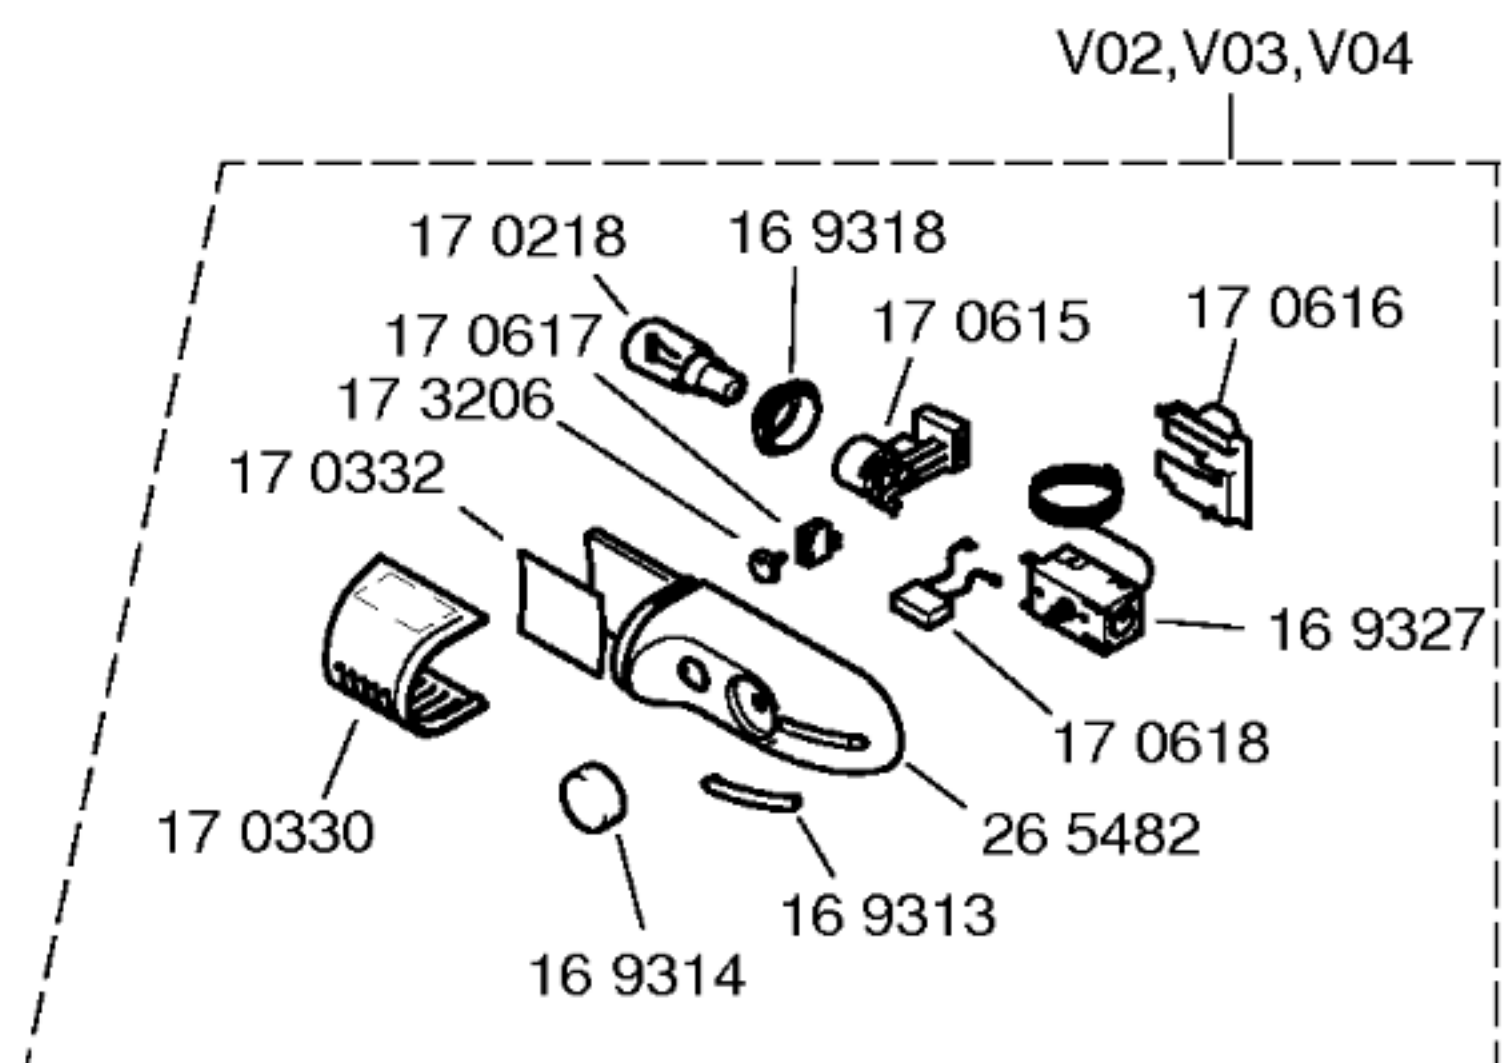


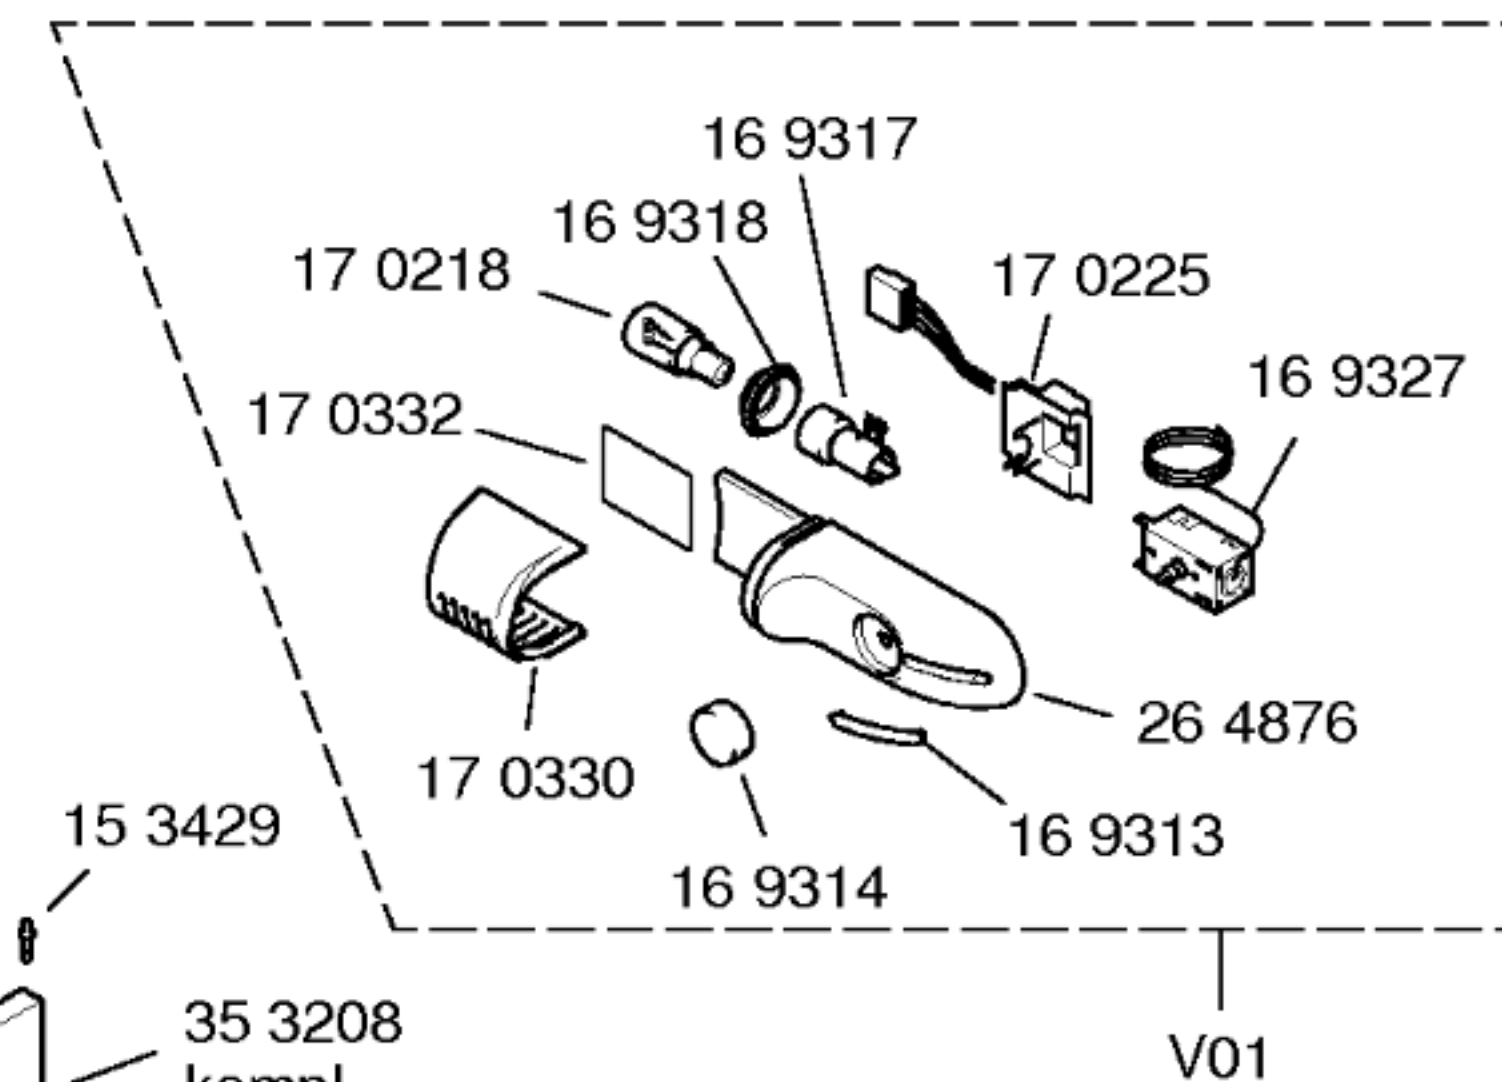


07 4445

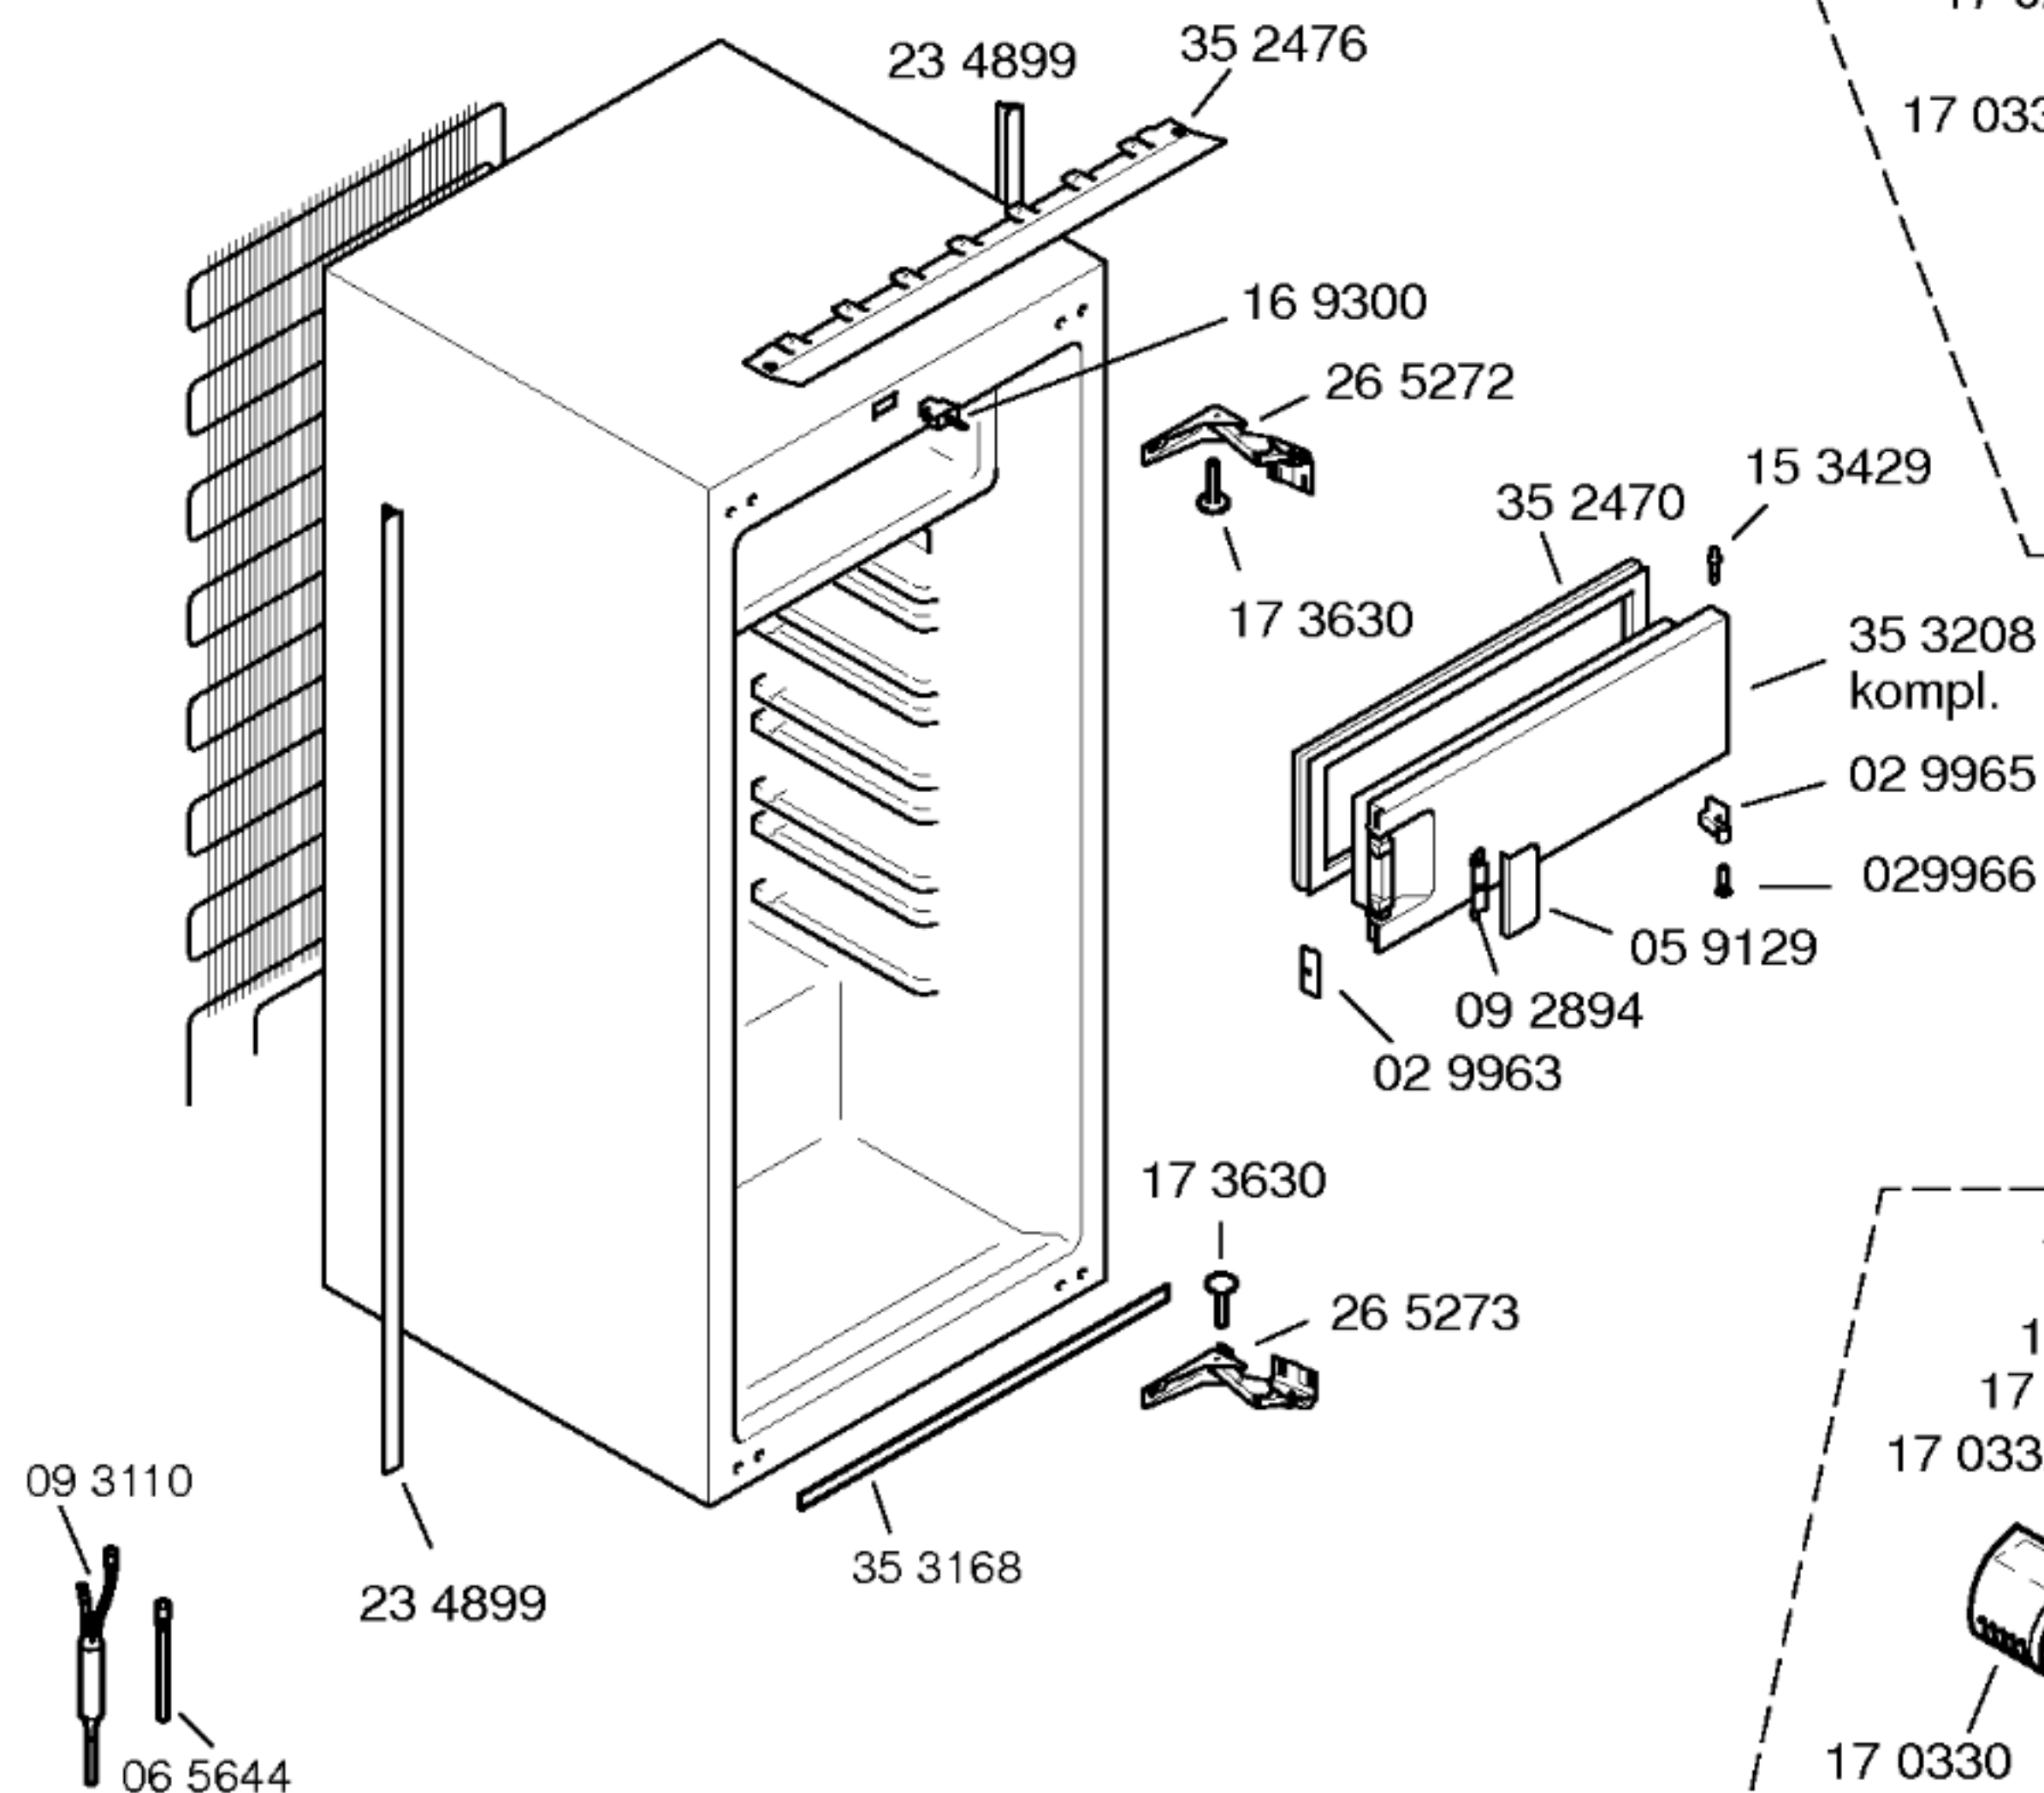


Gebrauchsanweisung  
 52 2861  
 (D,GB,F,I,NL)

Montageanleitung  
 52 2494

Beistellsatz  
 26 5163

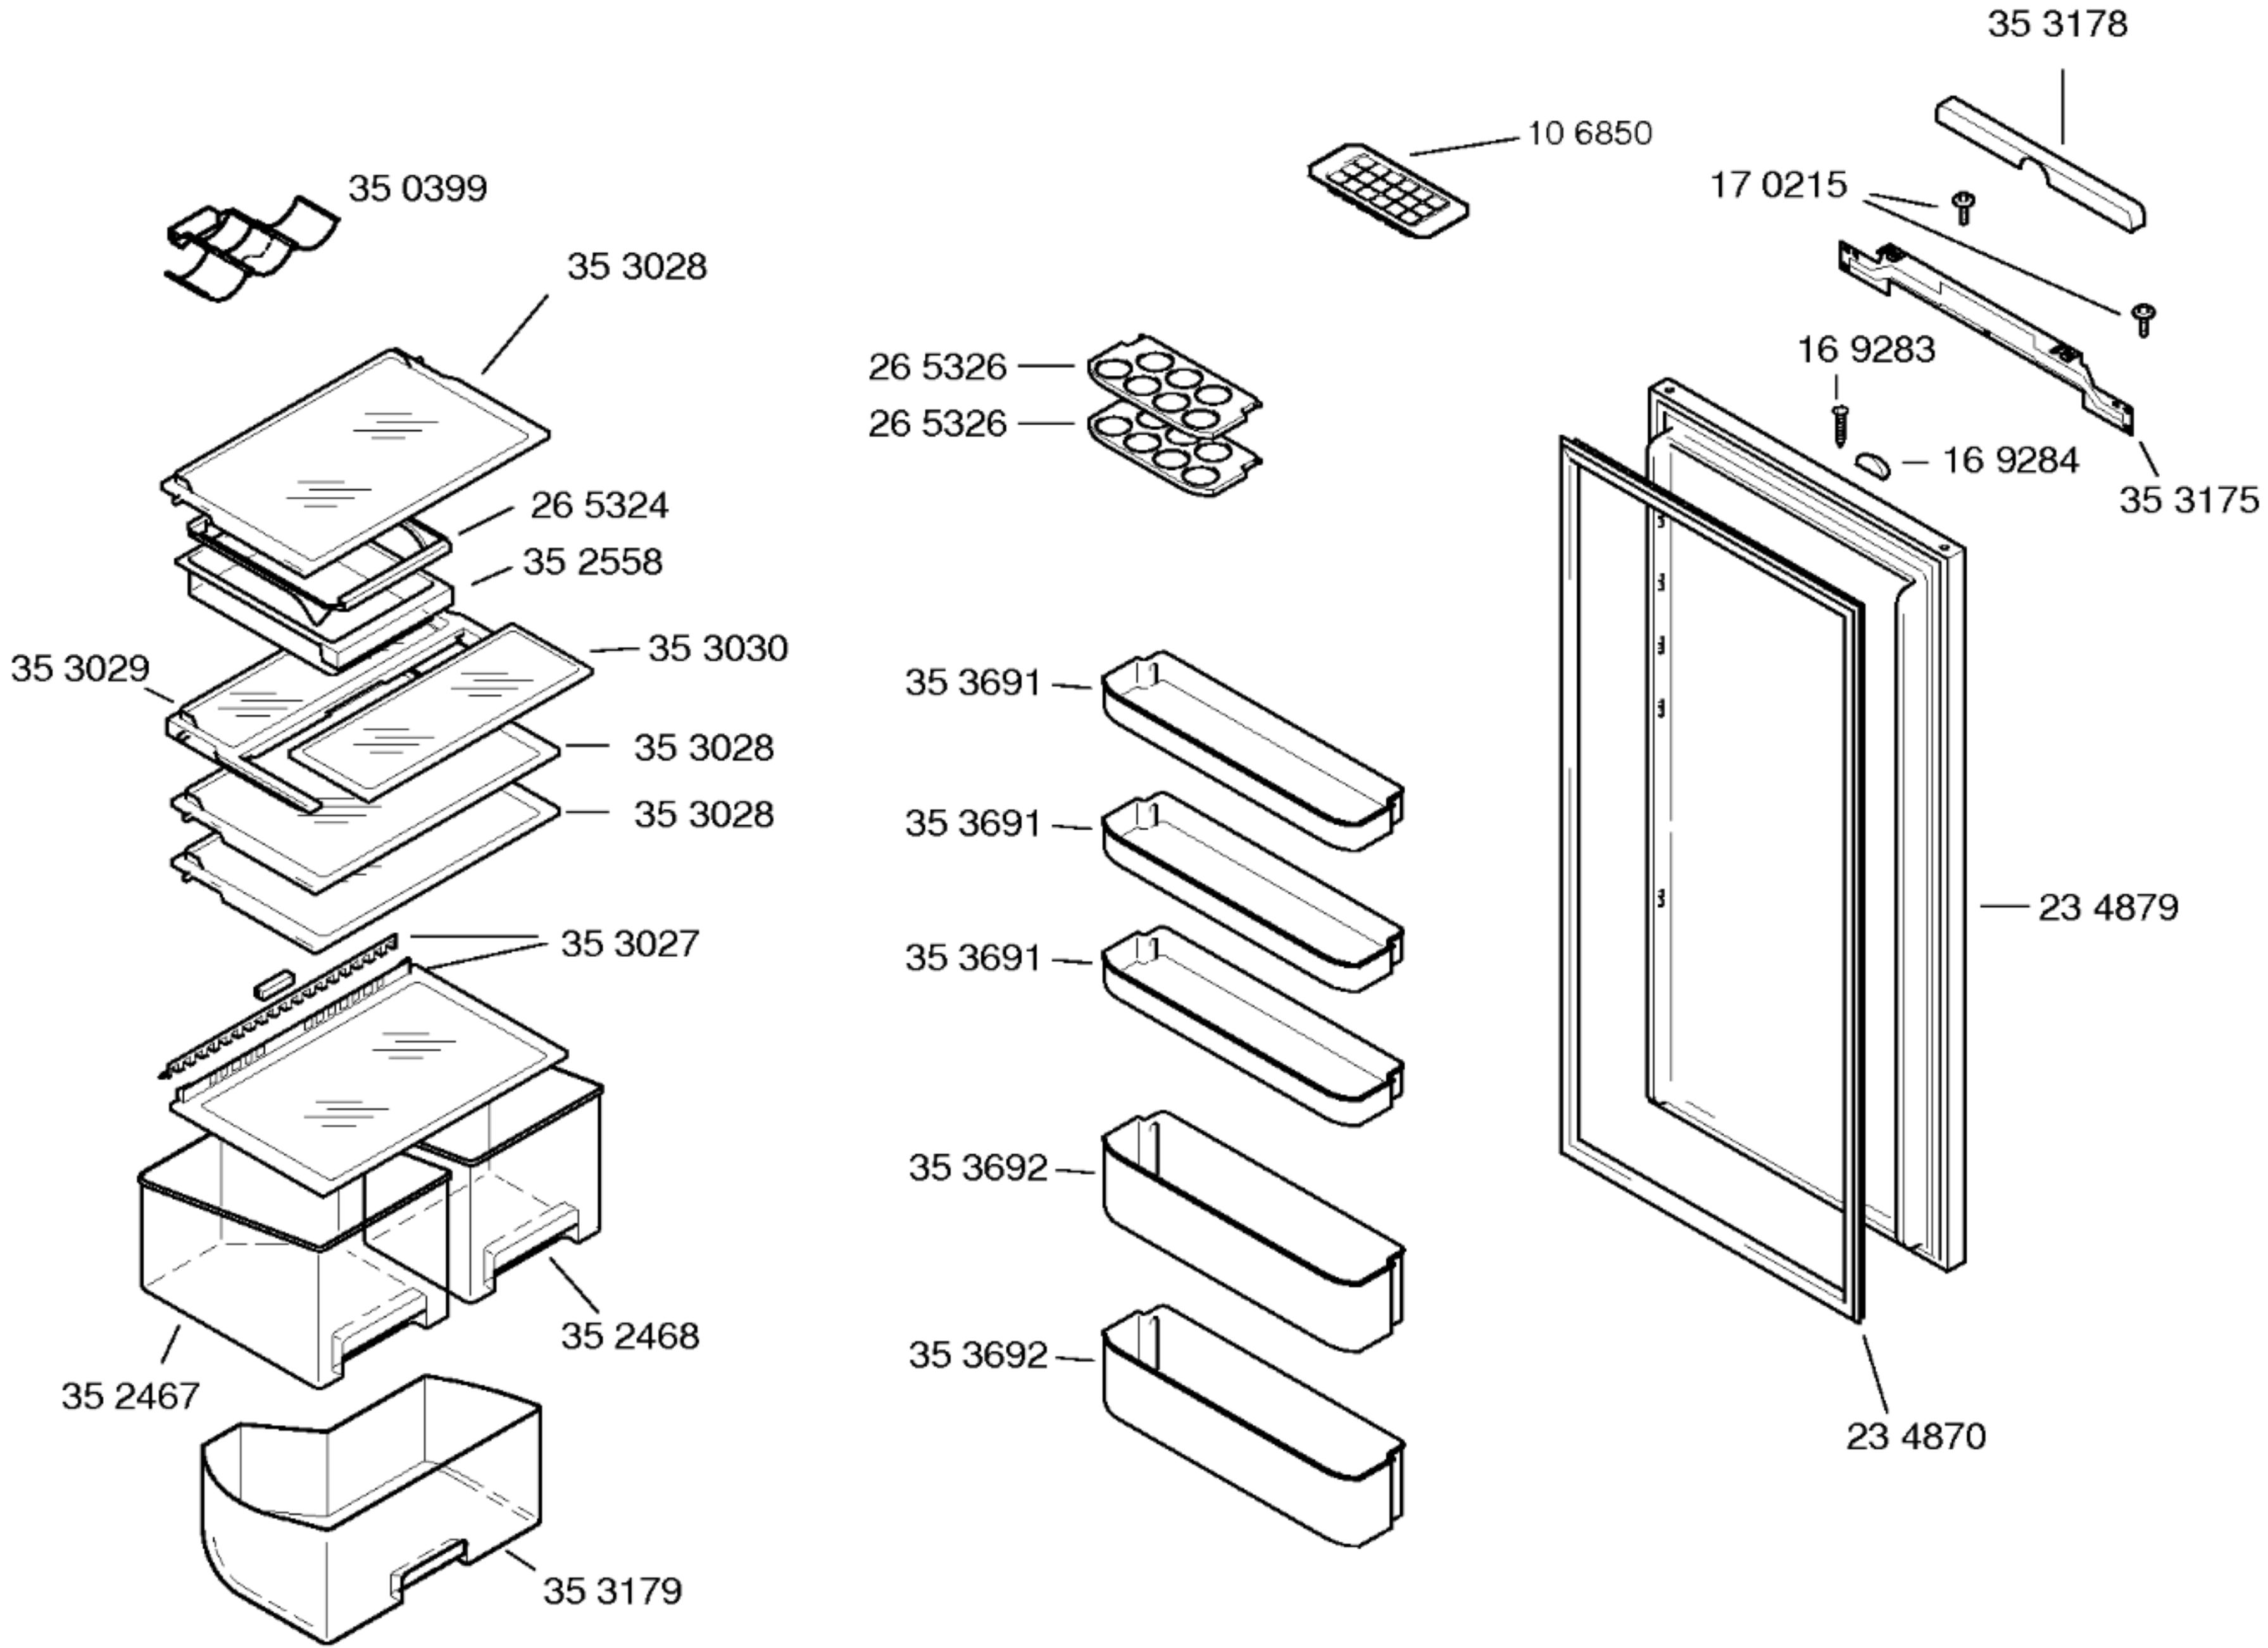

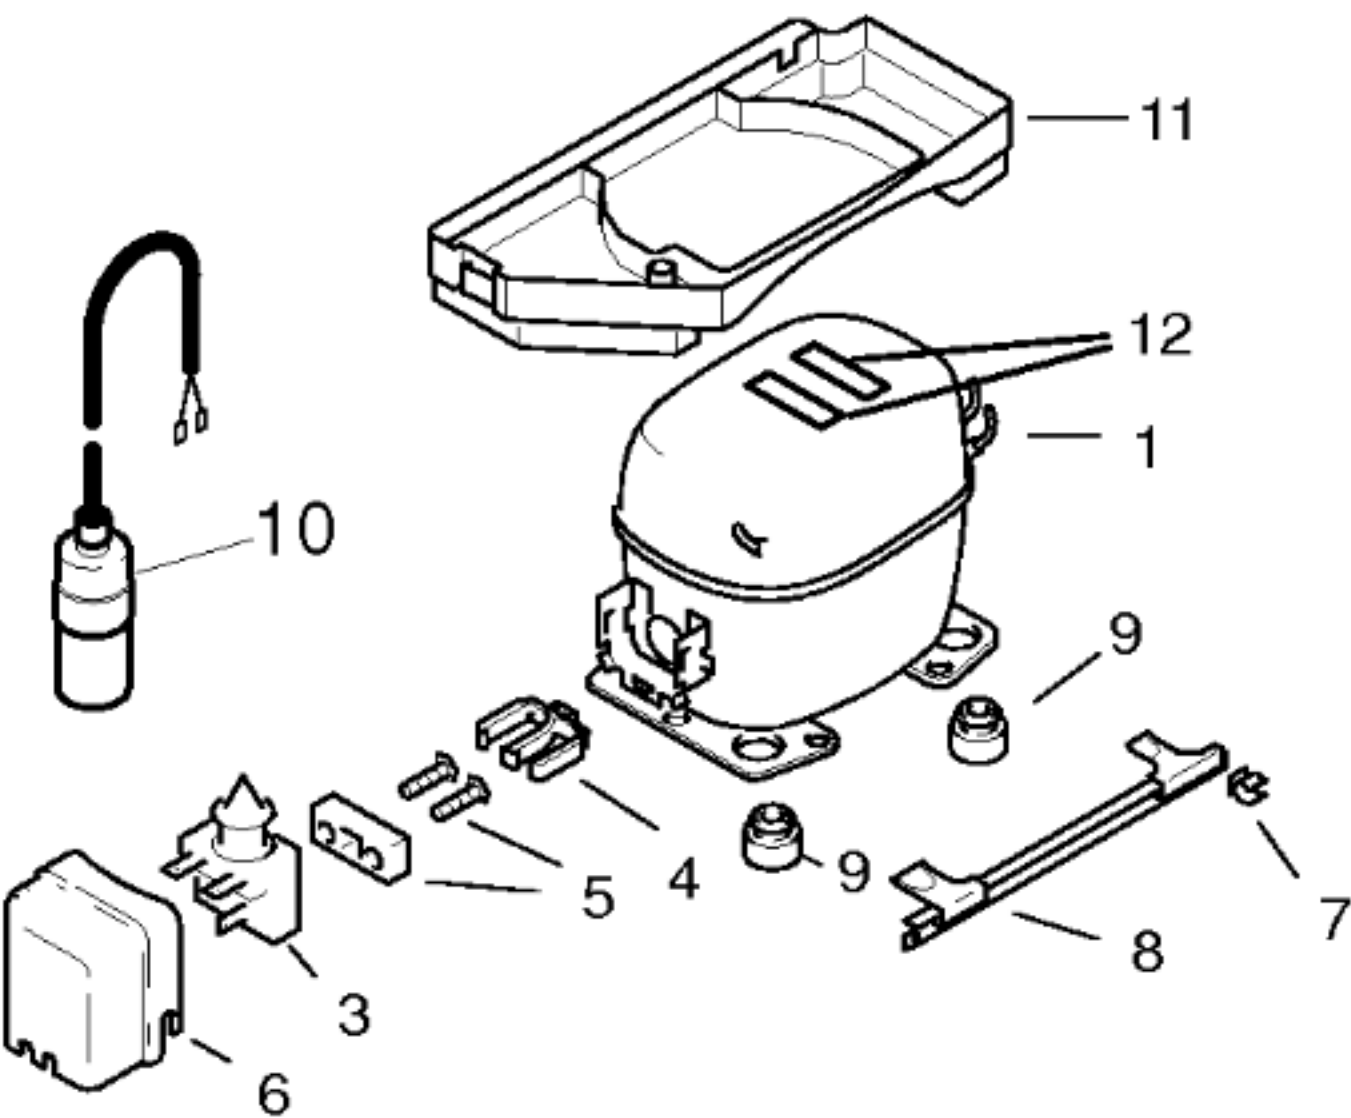

|      | V01     | V02,V03    | V05     |
|------|---------|------------|---------|
| Pos. | Danfoss | Aspera     | Danfoss |
|      | TLY8K   | EMT 32 CLP | TLY7K   |
| 1    | 14 1657 | 14 1838    | 14 1816 |
| 2    |         |            |         |
| 3    | 15 1055 | 17 0880    | 15 1055 |
| 4    | 15 1053 |            | 15 1053 |
| 5    | 15 0760 | 17 0882    | 15 0760 |
| 6    | 15 1072 | 17 0881    | 15 1072 |
| 7    | 16 9319 | 16 9319    | 16 9319 |
| 8    | 26 4879 | 26 4879    | 26 4879 |
| 9    | 05 0166 | 05 0166    | 05 0166 |
| 10   | 16 5852 |            | 16 5852 |
| 11   | 26 4878 | 26 4878    | 26 4878 |
| 12   | 05 6008 | 05 6008    | 05 6008 |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |         |  |            |
|--------------------------------------------------------|--|---------|--|------------|
| Verdichter/Compressor/Compresseur                      |  | Danfoss |  | Aspera     |
| Typ/Type                                               |  | TLY8K   |  | EMT 32 CLP |
| Förderleistung/Delivery/Débit                          |  | l/h     |  | 1073       |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A       |  | 3,5        |
| Widerstand/Resistance/Résistance Ha/main/prin          |  | Ω       |  | 28,4       |
| Hi/aux                                                 |  | Ω       |  | 24,7       |
| Temp.-Regler/Thermostat                                |  | KER     |  |            |
| Typ/Type                                               |  | RCO     |  |            |
| Regelstellung/Position                                 |  | kalt    |  | warm       |
| Schaltwerte/Switching values                           |  | +5,2    |  | +5,2       |
| Valeurs de commutation                                 |  | -32,0   |  | -15,0      |
| Füllmenge/Fill.quantity/Charge                         |  | R600a   |  | *          |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W       |  | 90         |
|                                                        |  |         |  | 68         |
|                                                        |  |         |  | 67         |
| Heizung/Heater/Chauffage                               |  |         |  |            |
| Widerstand/Resistance/Résistance                       |  | Ω       |  |            |
| Leistung/Power/Puissance                               |  | W       |  |            |
| Ventilator/Blower/Ventilateur                          |  |         |  |            |
| Widerstand/Resistance/Résistance                       |  | Ω       |  |            |
| Temp.-Regler/Thermostat                                |  |         |  |            |
| Magnetventil/Magnetic valve/Electrovanne               |  |         |  |            |
| Widerstand/Resistance/Résistance                       |  | Ω       |  |            |
| Spannung/Voltage/Tension                               |  | V       |  |            |

\* siehe Typenschild