



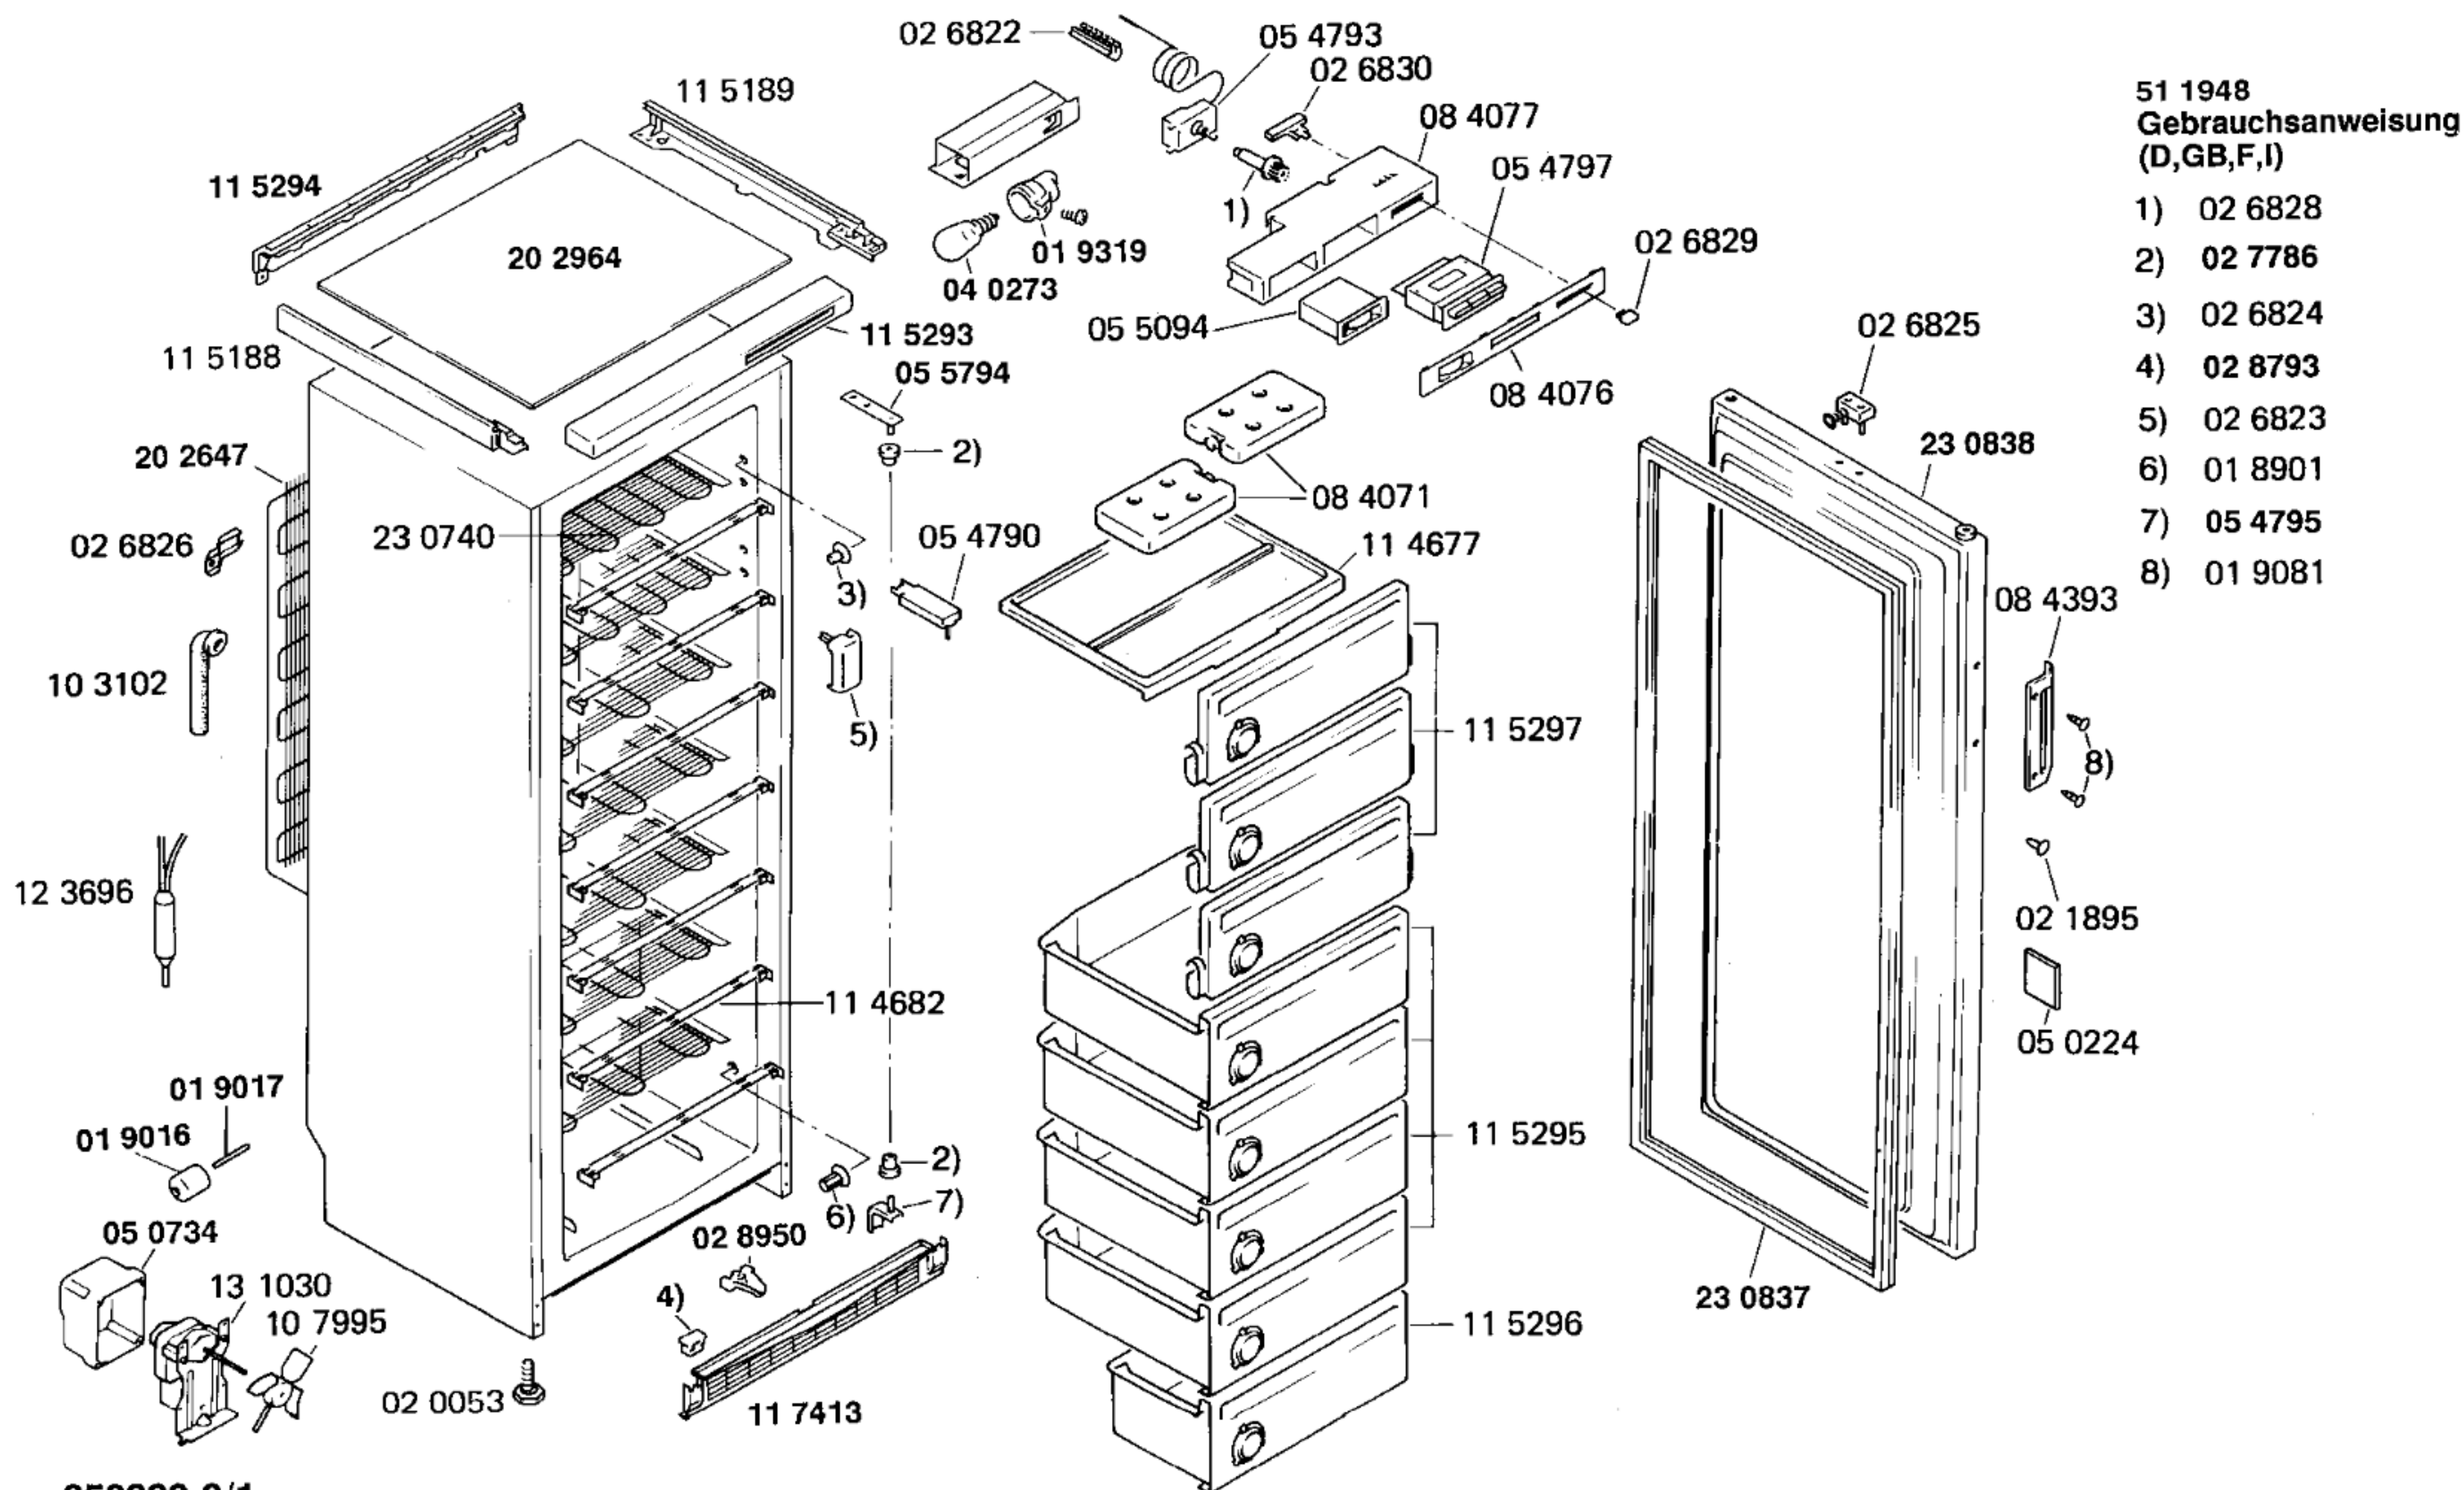

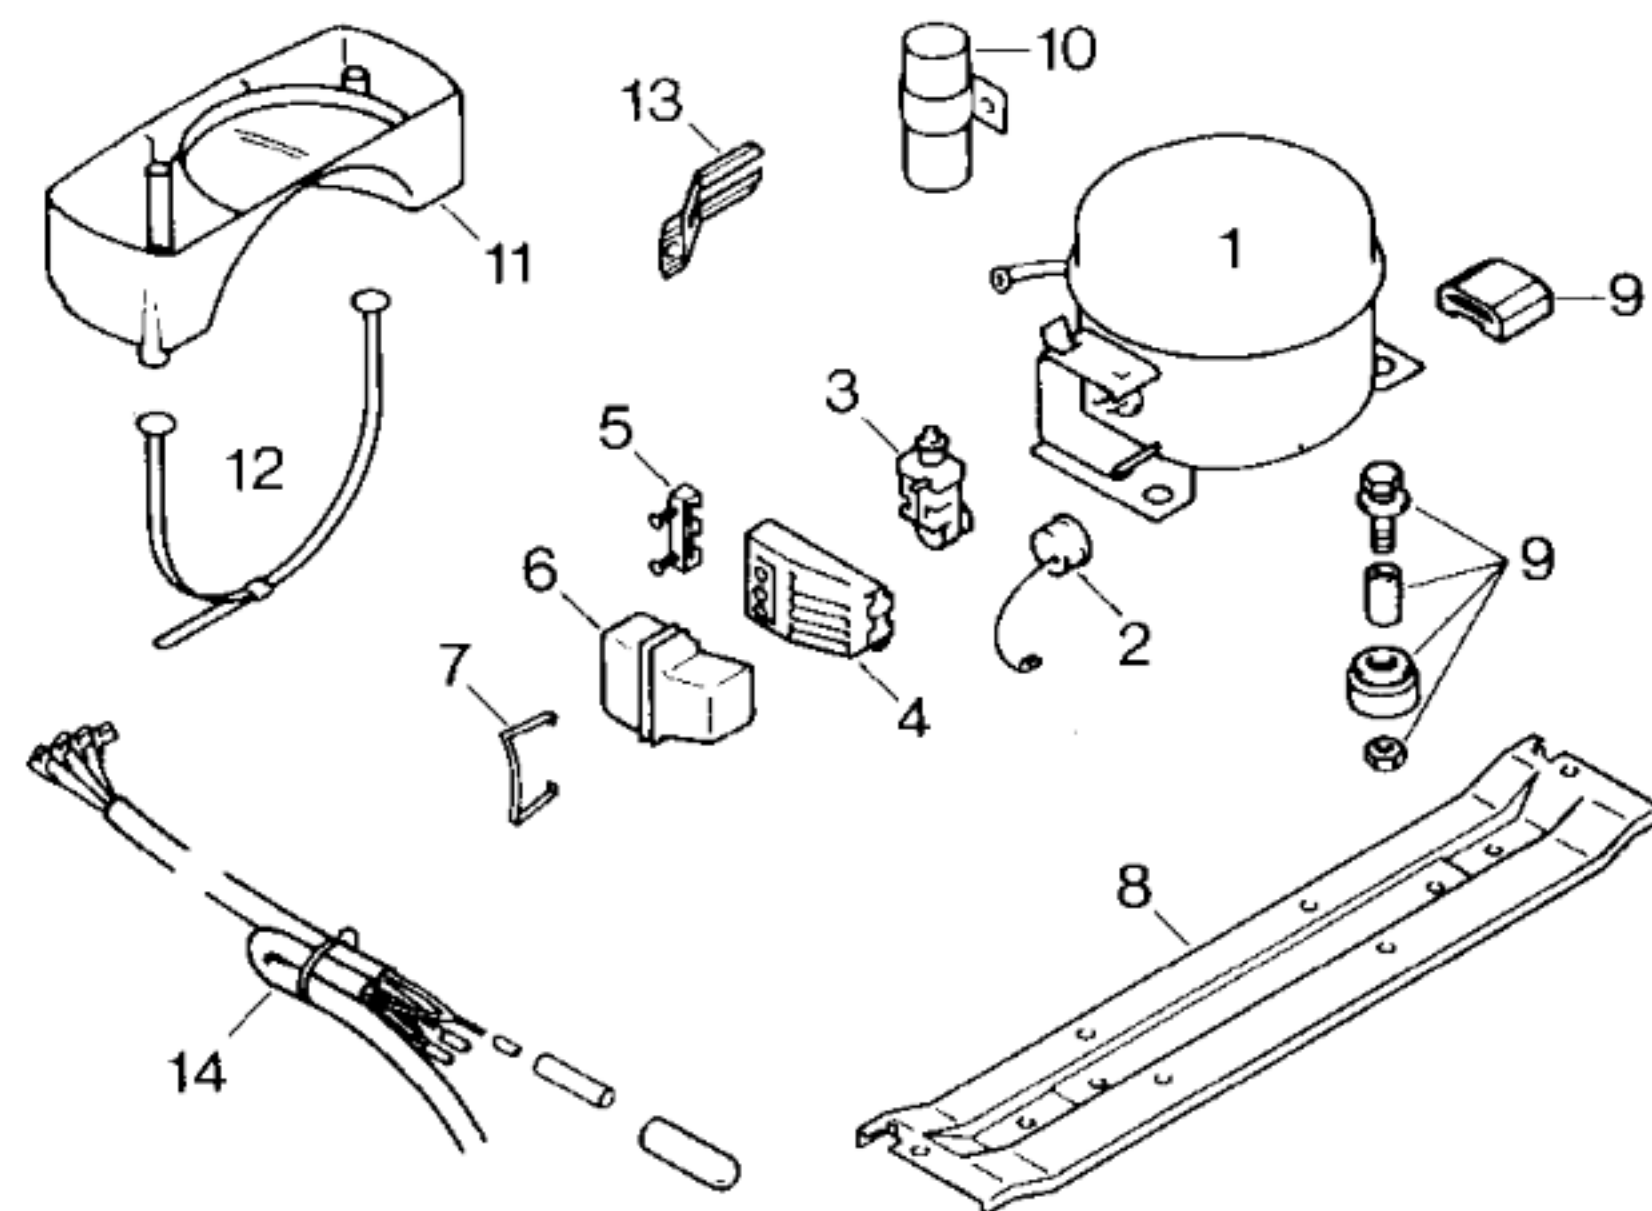

Pos.	EU1, EU4	EU2, EU3		
	Aspera	Danfoss		
1	14 0363	14 0427		
2	02 7670			
3	02 2342	02 0108		
4	05 1748			
5		02 1361		
6	05 1746	05 1413		
7	02 2339			
8				
9	05 0166			
10				
11				
12				
13				
14				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1118 A	FR 10 A		
Förderleistung/Delivery/Débit		l/h	1596	1629	
Anlaufstrom/Starting current/Cour. de démarrage		A	11,0	11,4	
Widerstand/Resistance/Résistance		Ω	9,9	10,7	
		Hi/aux	37,3	13,0	
Temp.-Regler/Thermostat			Danfoss		
Typ/Type			077 B 2054		
Reglerstellung/Position			kalt	warm	
Schaltwerte/Switching values/		°C	- 24	- 16	
Valeurs de commutation			- 34	- 24	
(„abtauen“ od.)			- 19	- 12	
Füllmenge/Fill.quantity/Charge	R12	g	220		
Anschlußwert/Conn.load/Puiss. connectée		W	190		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			