



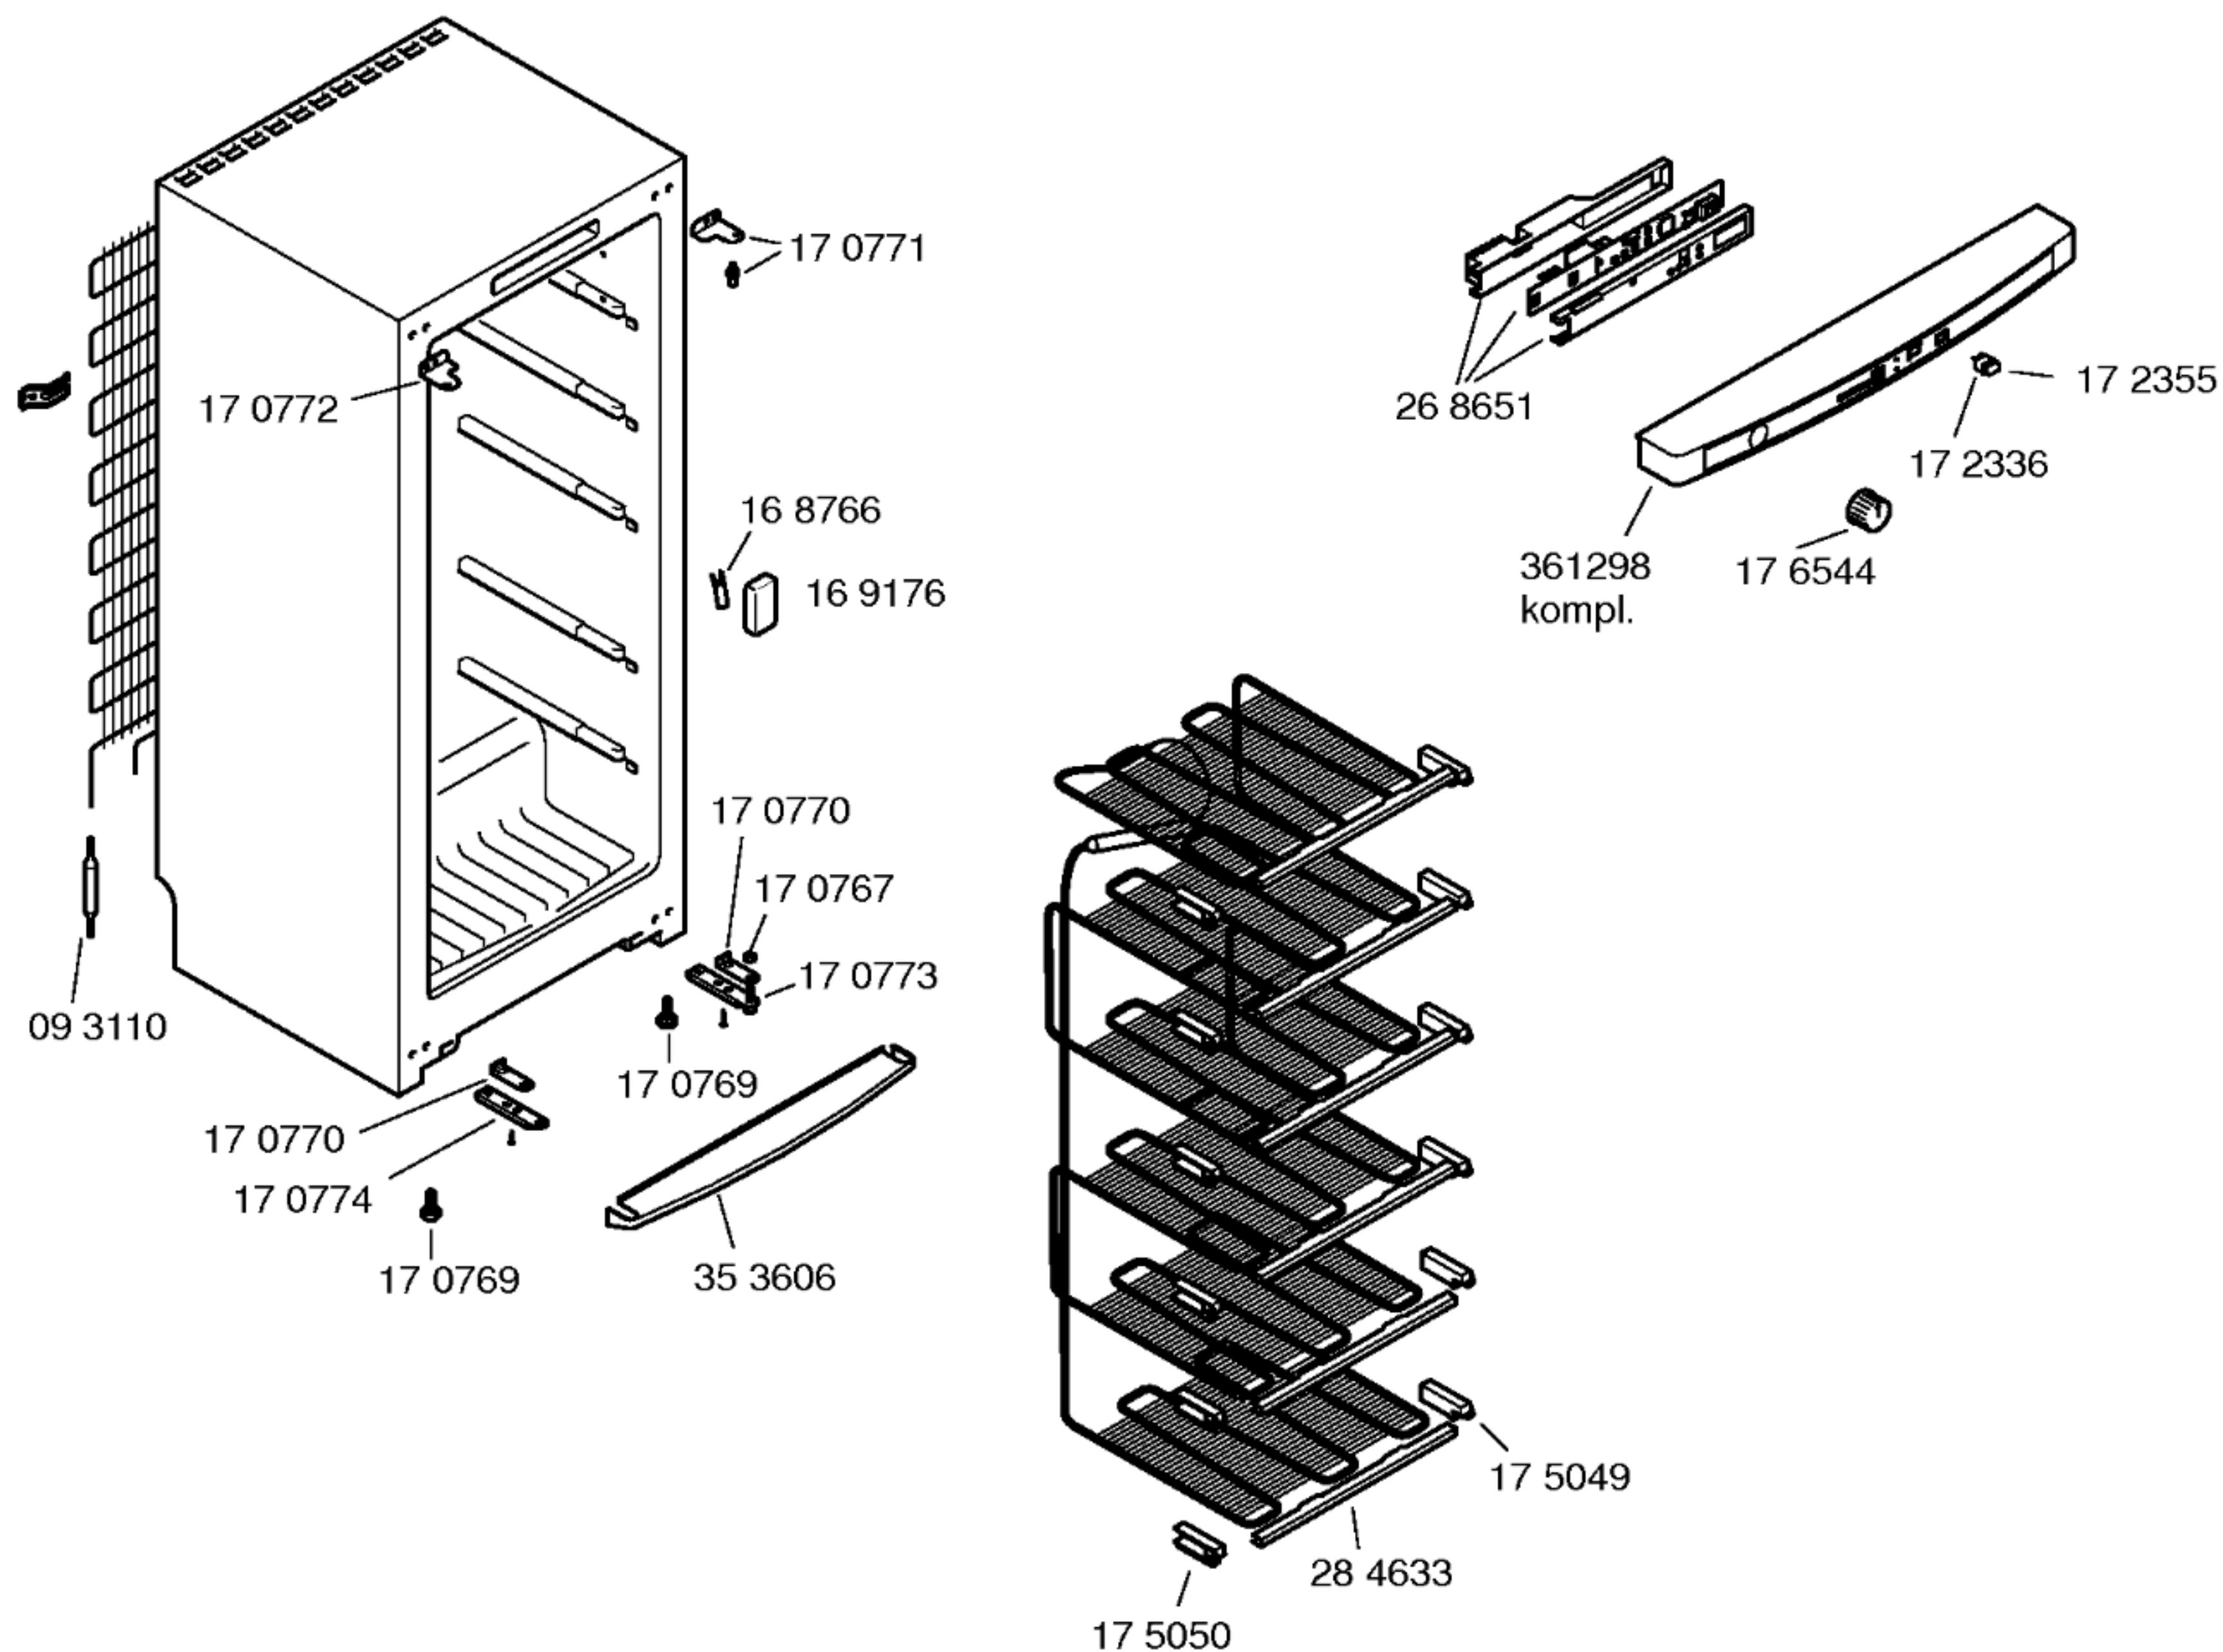


Mat. – Nr. – Konstante
3740


Gebrauchsanweisung
52 8124
(D,GB,F,I,NL,E,P)

Montageanleitung
52 2772
(D,GB,F,I,NL,DK,N,SF,
SE,TR)

Beistellsatz
26 5629

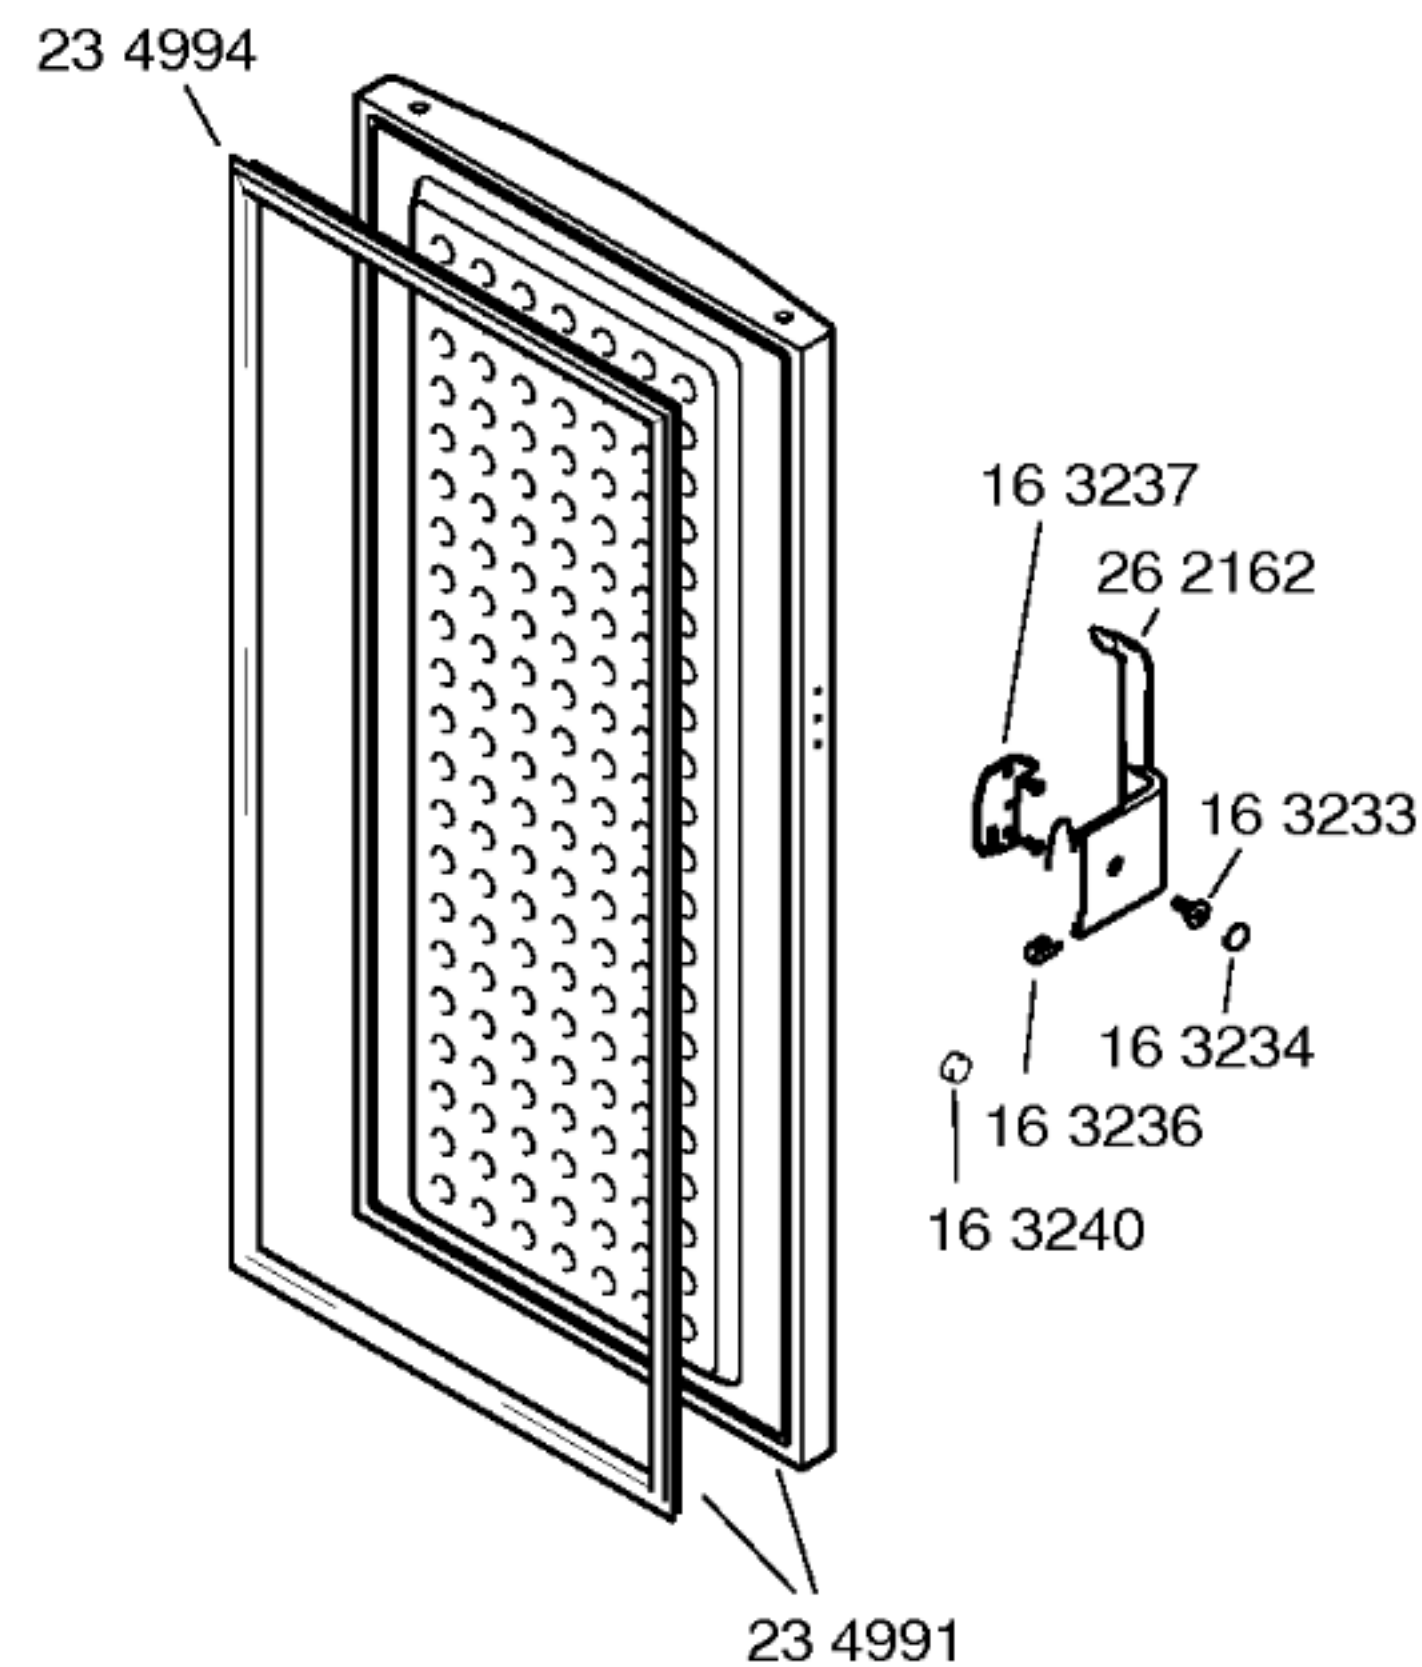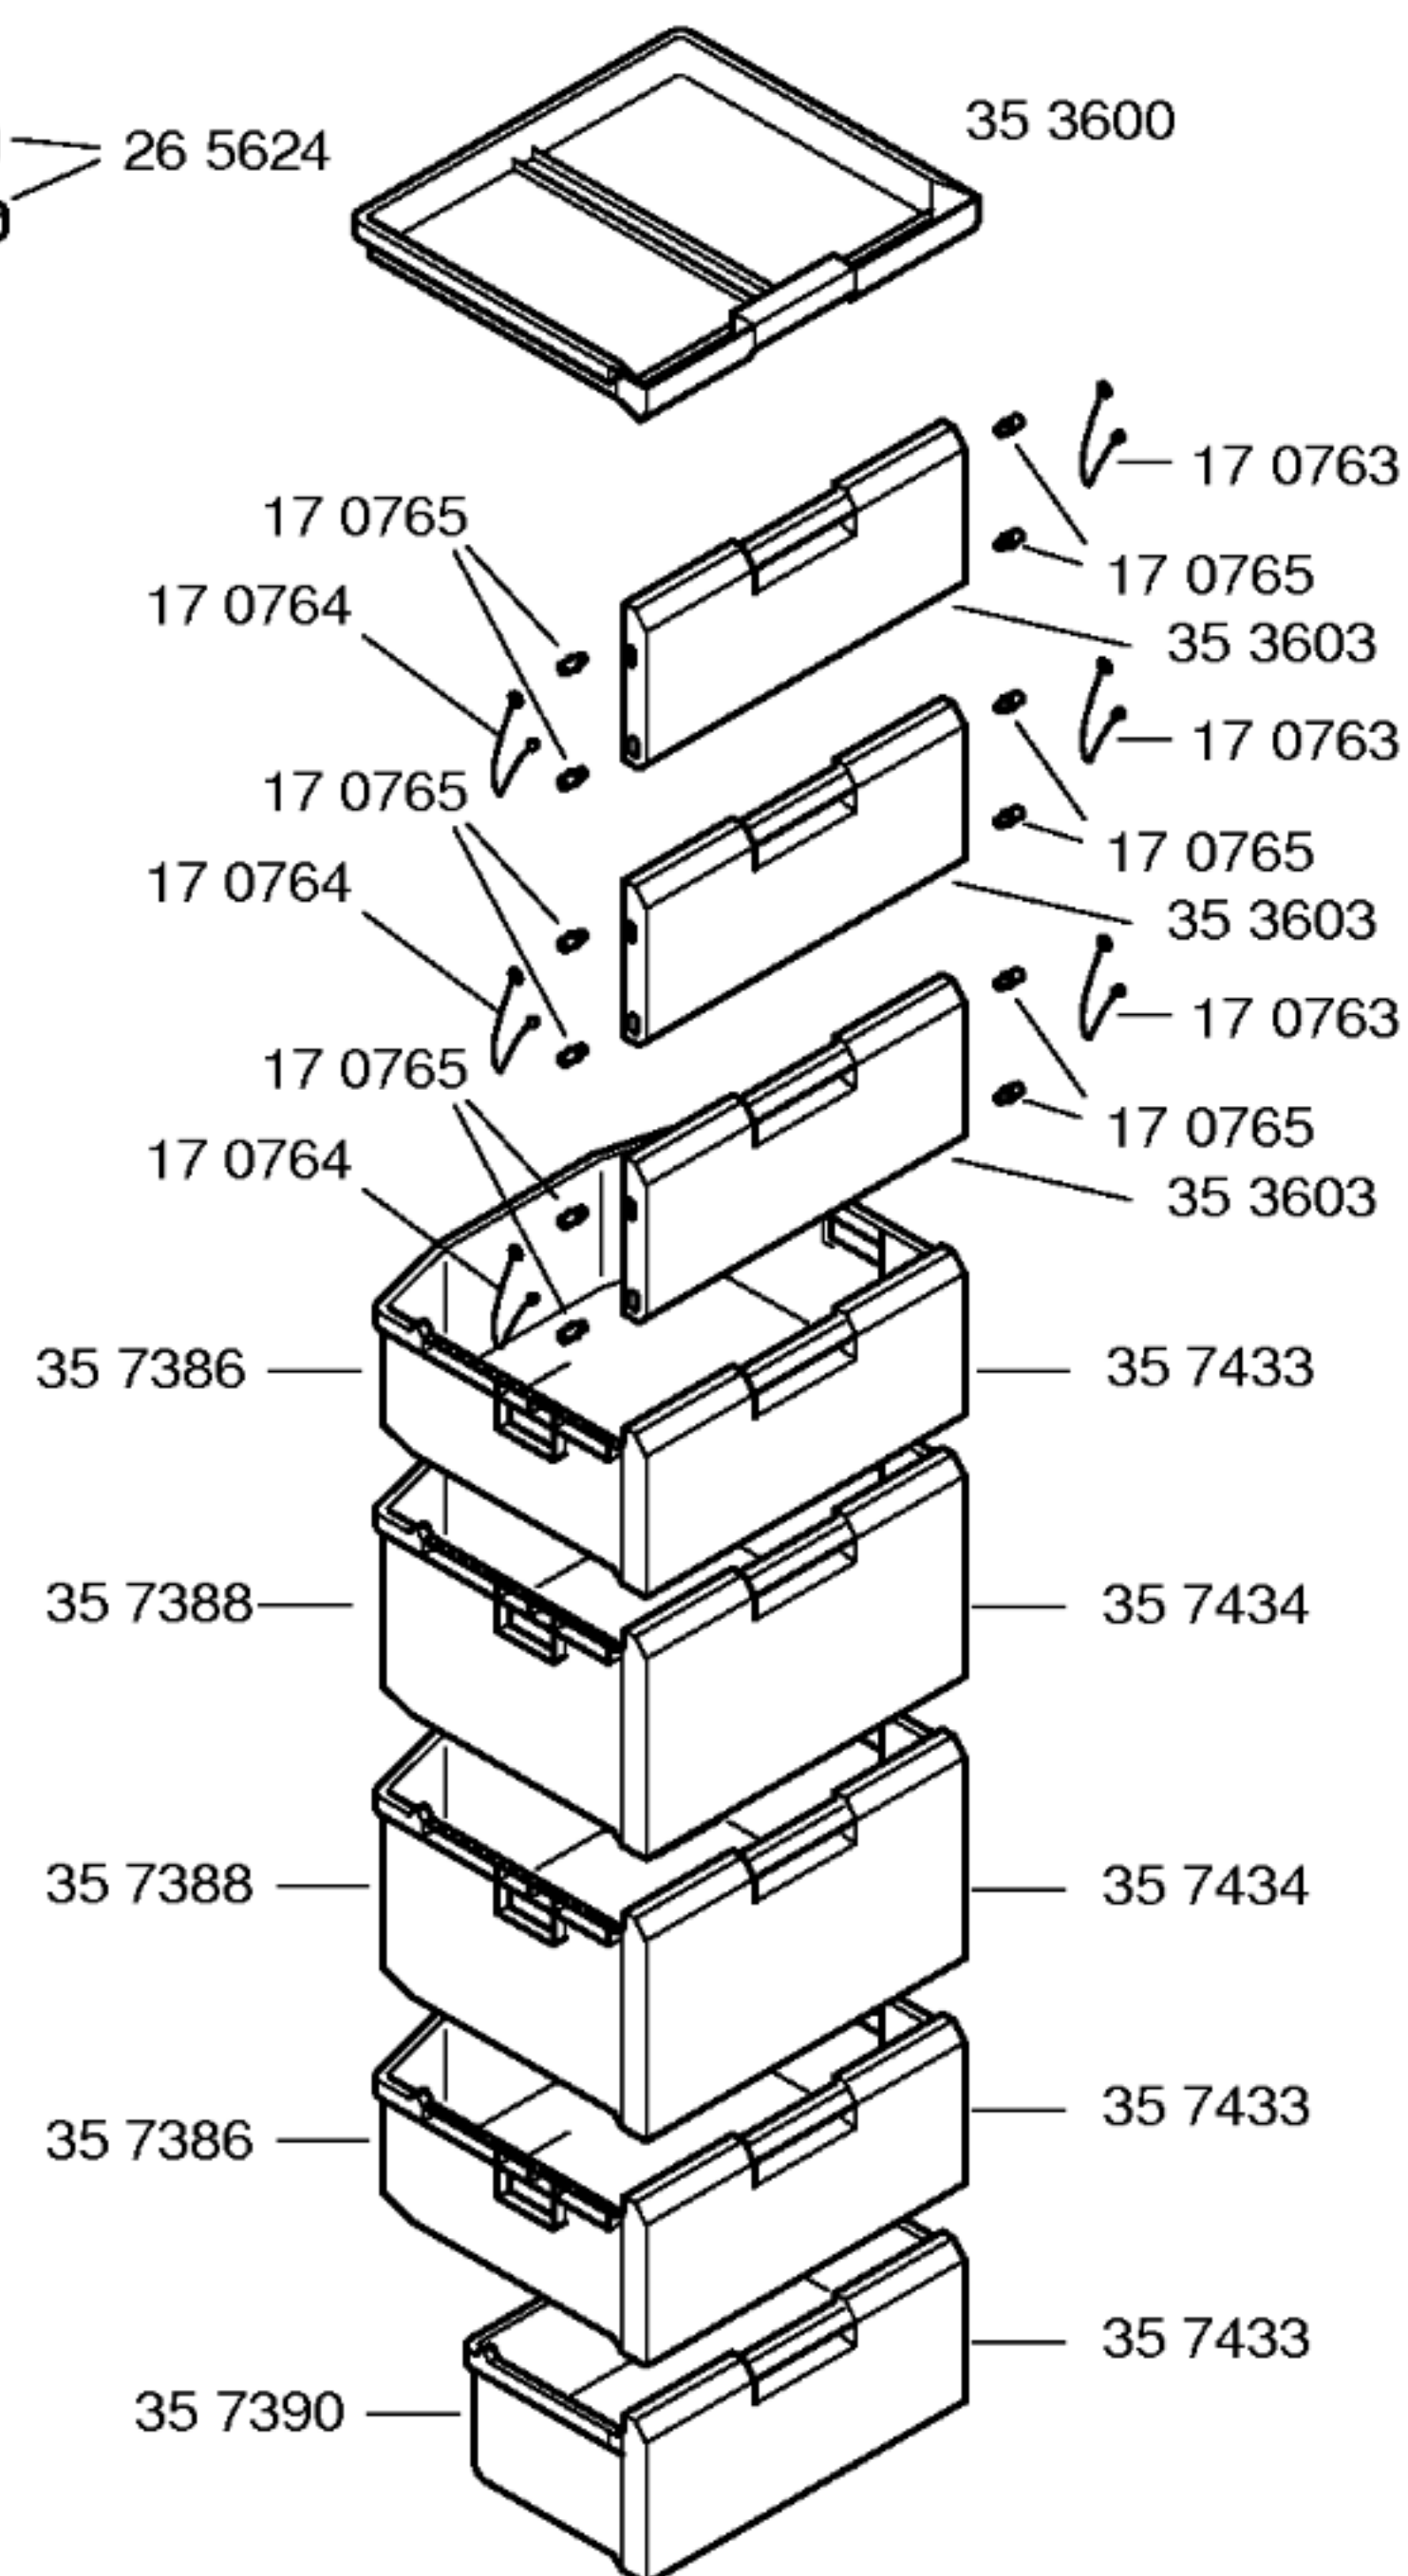

Mat. – Nr. – Konstante
3740

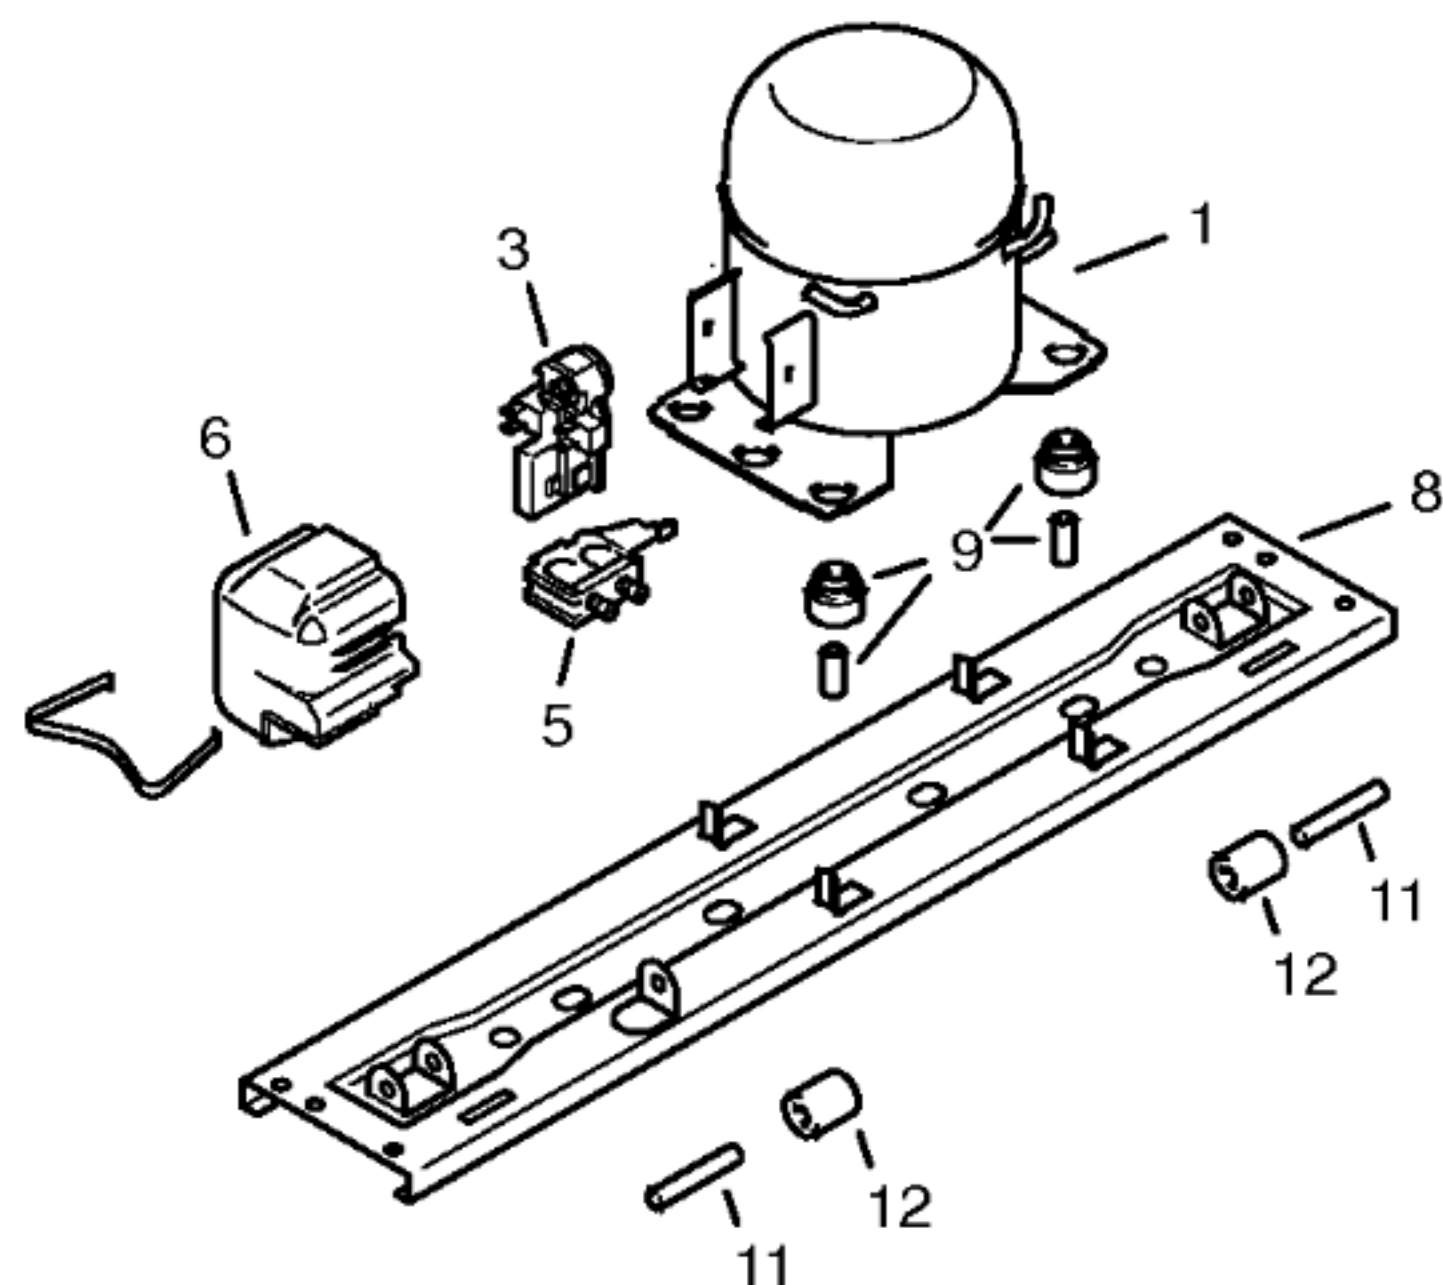Mat. – Nr. – Konstante
3740

	V01	V02	
	Danfoss	Matsushita	
Pos.	NLY13K	DC125E	
1	14 1747	14 2131	
2			
3	15 1055	17 2967	
4			
5	15 0760	16 2549	
6	15 1072	16 6782	
7			
8	21 4604	21 4604	
9	05 0166	05 0166	
10			
11	01 9017	01 9017	
12	01 1916	01 1916	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		NLY13K	DC125E	
Förderleistung/Delivery/Débit		l/h	2394	2246
Anlaufstrom/Starting current/Cour de démarrage		A	11,3	
Widerstand/Resistance/Résistance		Ω	11,00	
Hi/aux		Ω	9,0	
Temp.–Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values		"warm"		
Valeurs de commutation		"kalt"		
		"alarm"		
Füllmenge/Fill.quantity/Charge		R600a		
Anschlußwert/Conn.load/Puiss. connectée		W	133	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
NTC–Fühler / Sensor		°C	kΩ	°C
		+10	9,95 ±0,18	–18
		+5	12,70 ±0,18	–22
		0	16,33 ±0,16	–26
			43,31 ±1,10	
			54,66 ±1,59	
			69,42 ±2,29	
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		