

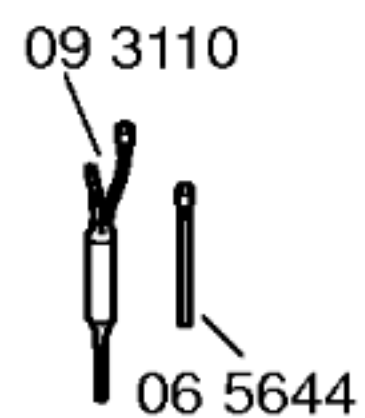
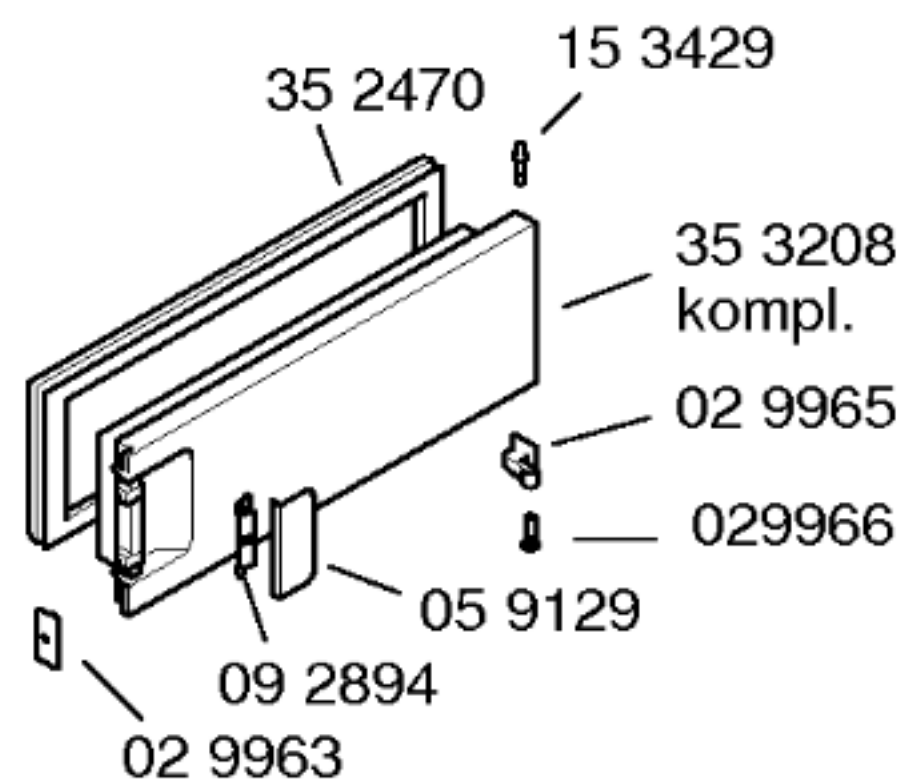


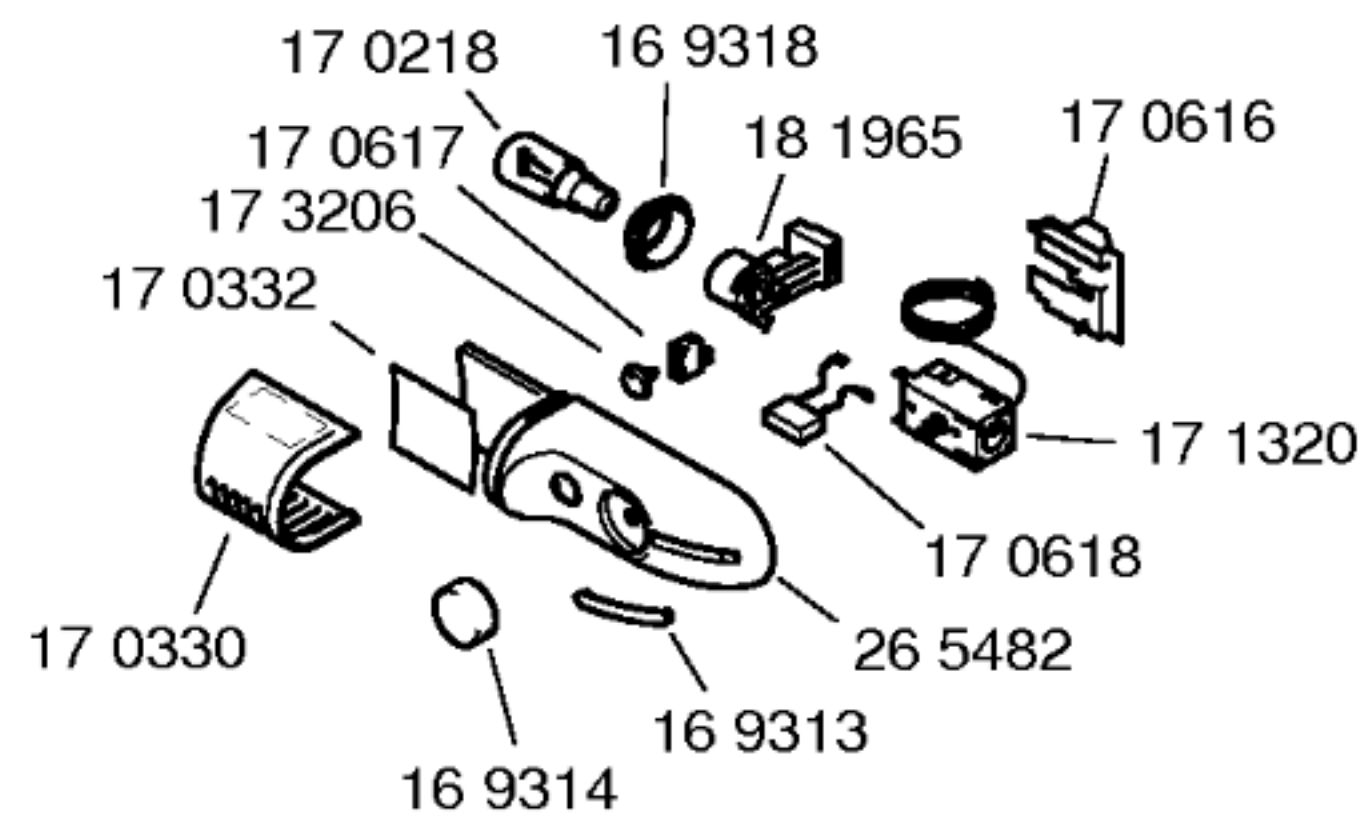


07 4445

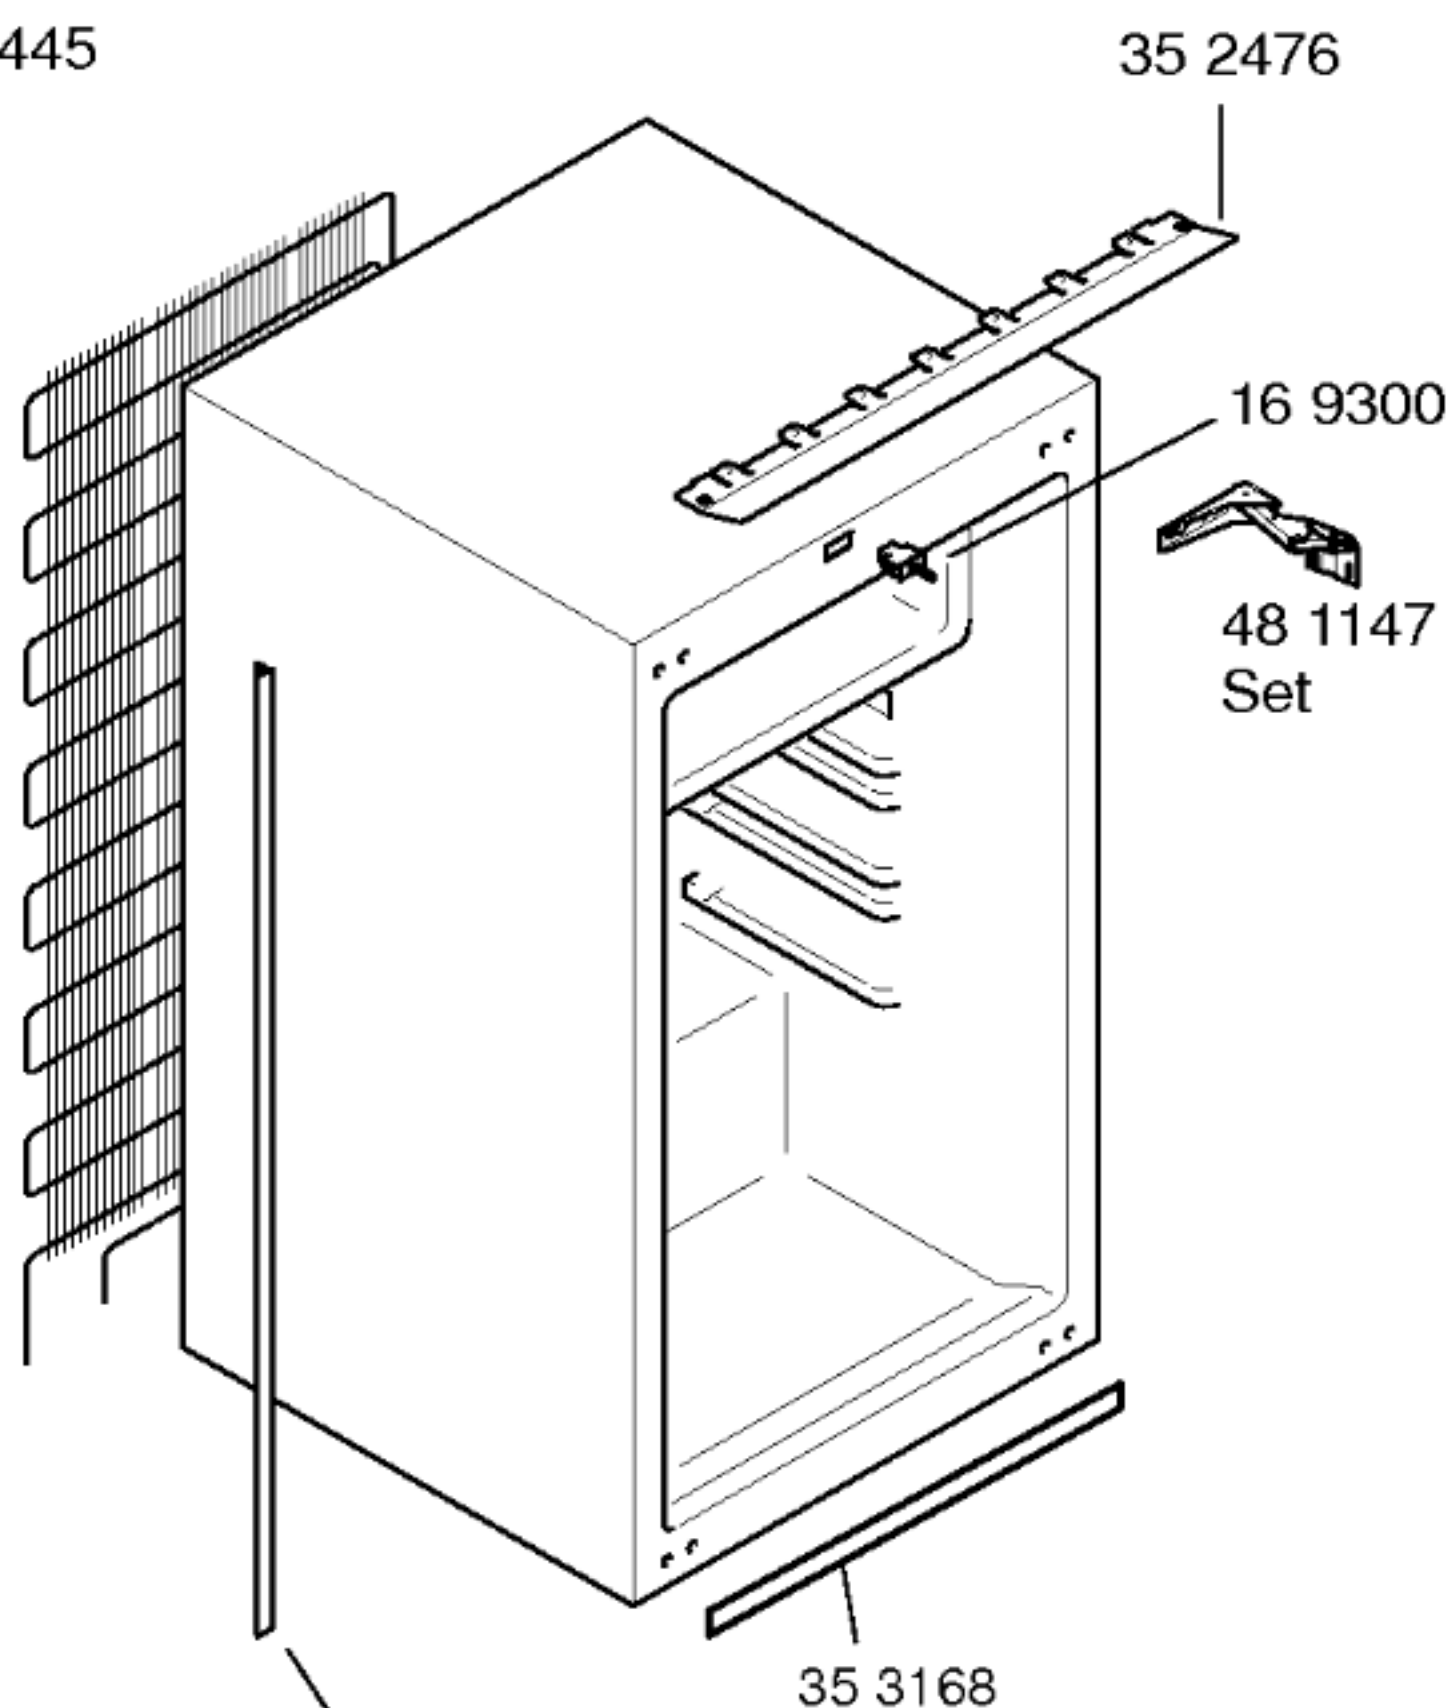


Gebrauchsanweisung  
52 8708  
(DE, EN, FR, IT, NL)

Montageanleitung  
52 2494  
(DE, EN, FR, IT, NL, DA,  
NO, FI, SE, TR)

Beistellsatz  
26 5162

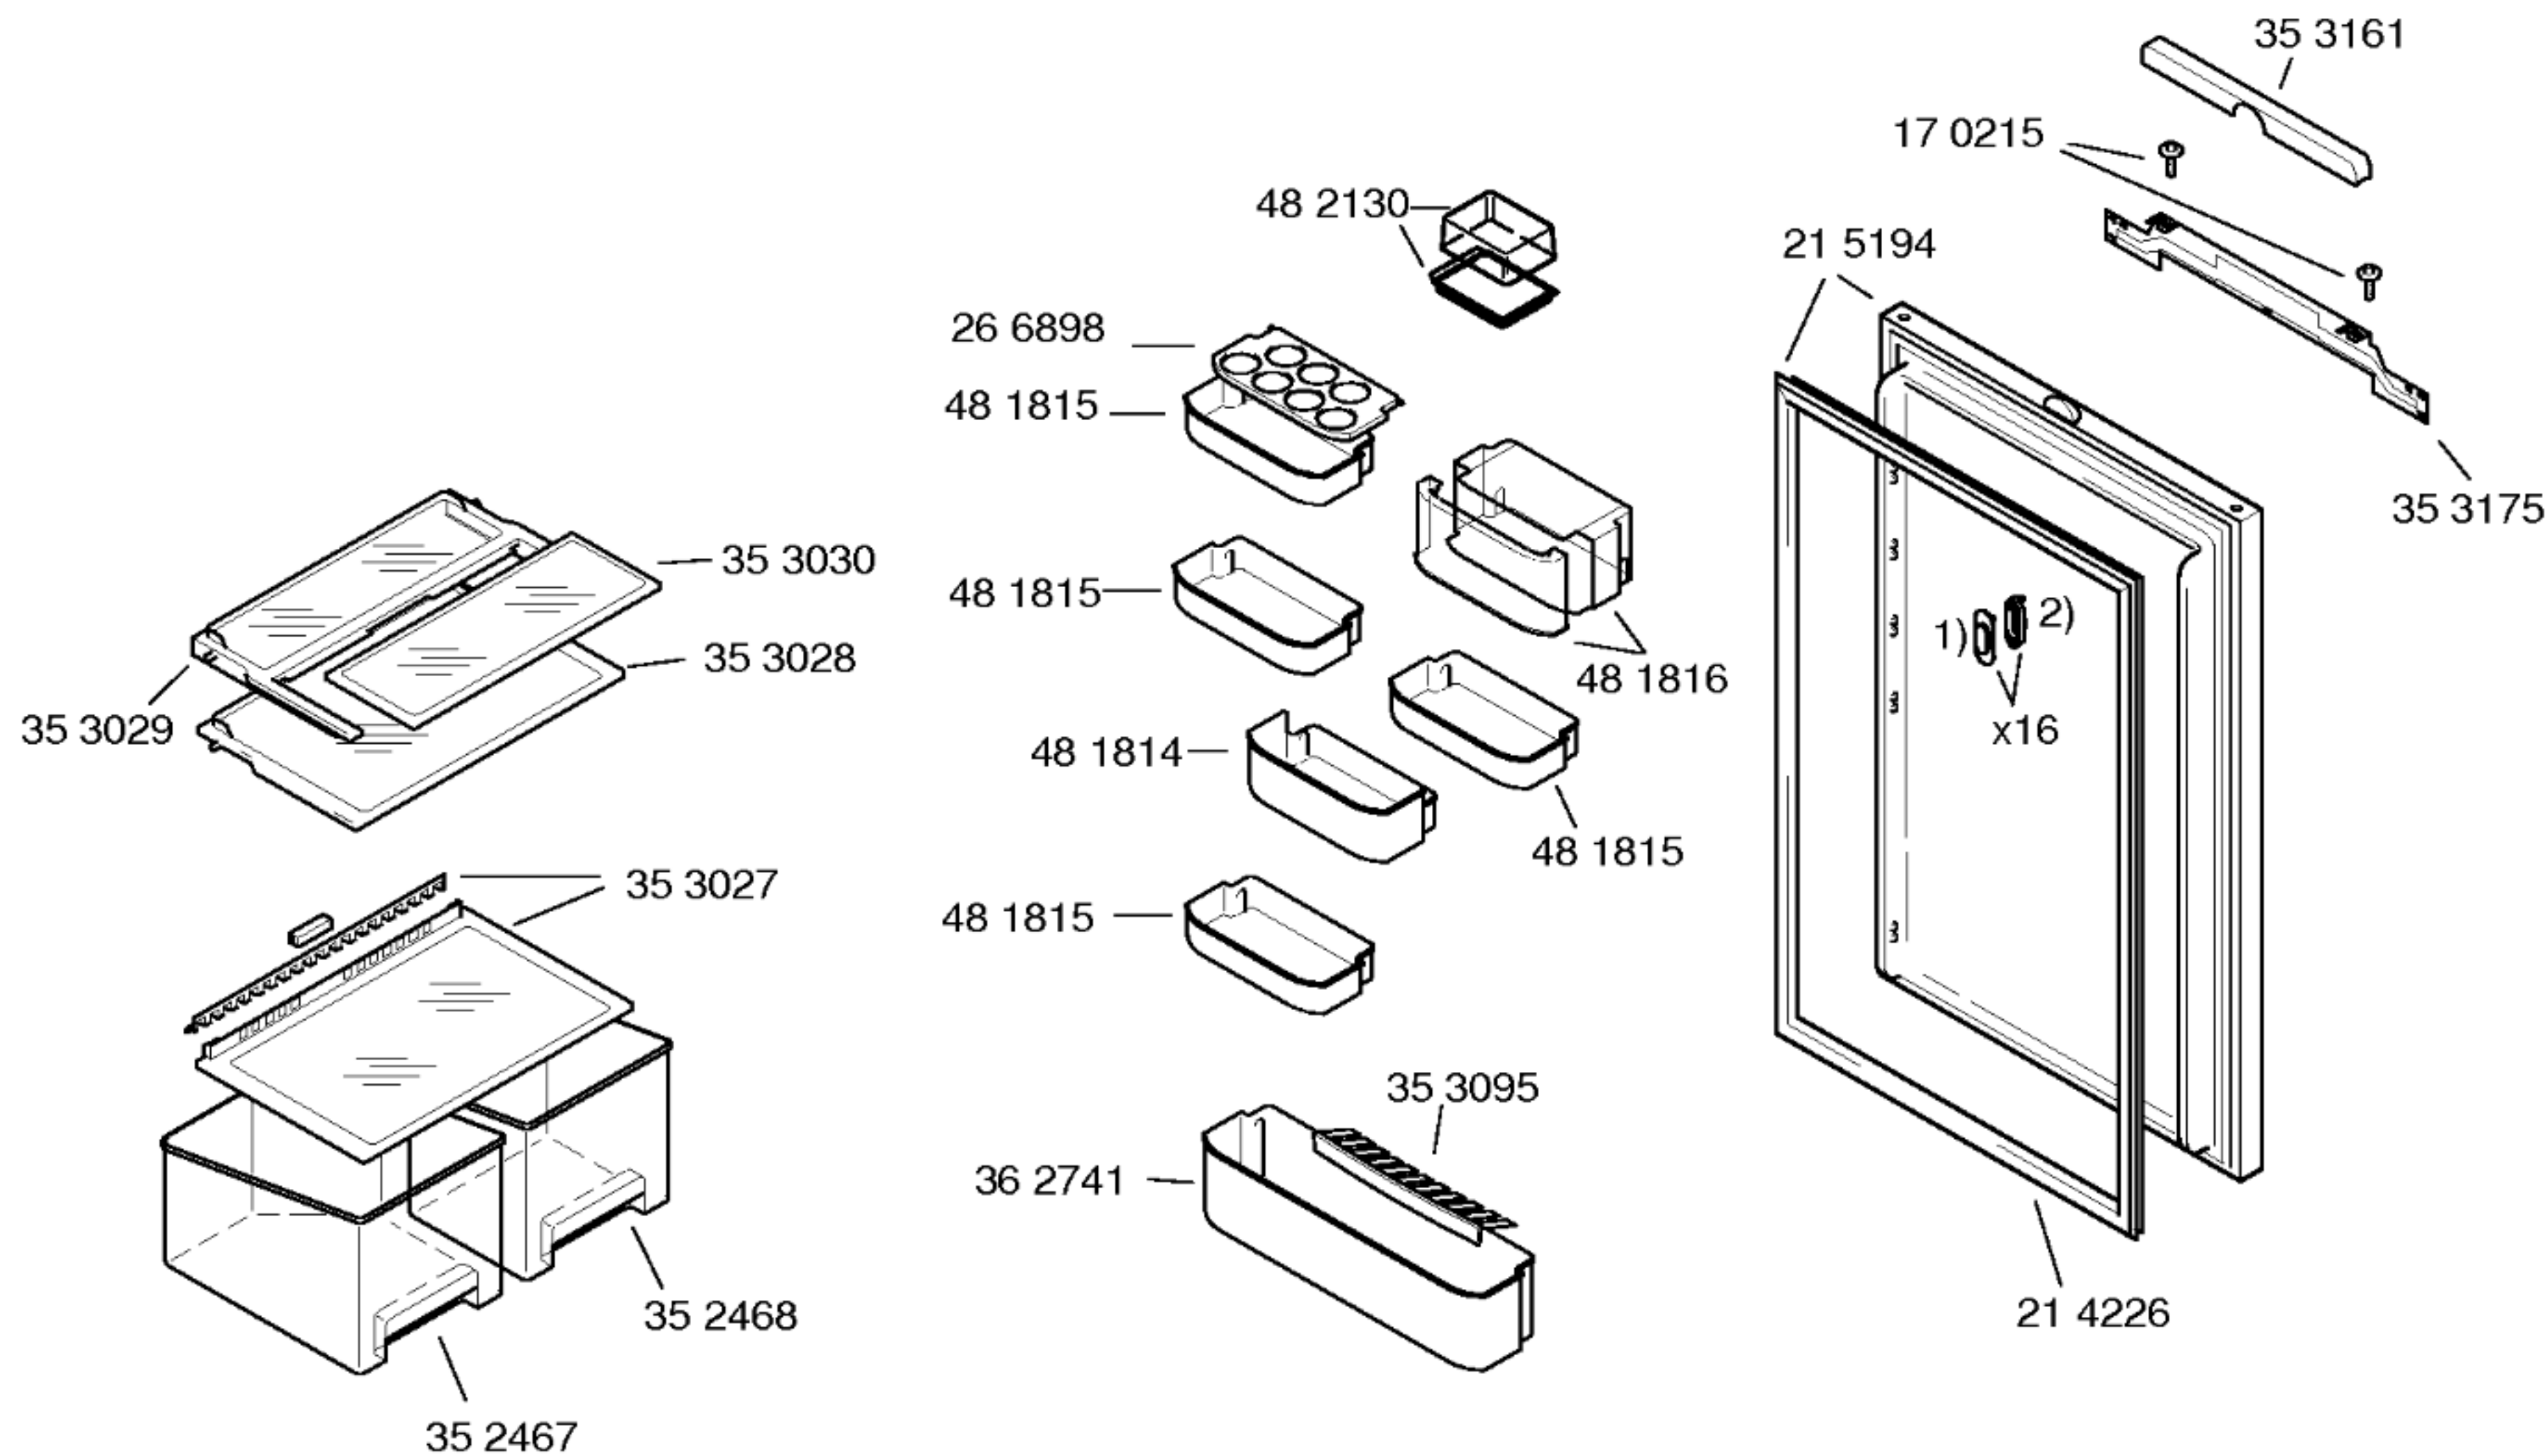

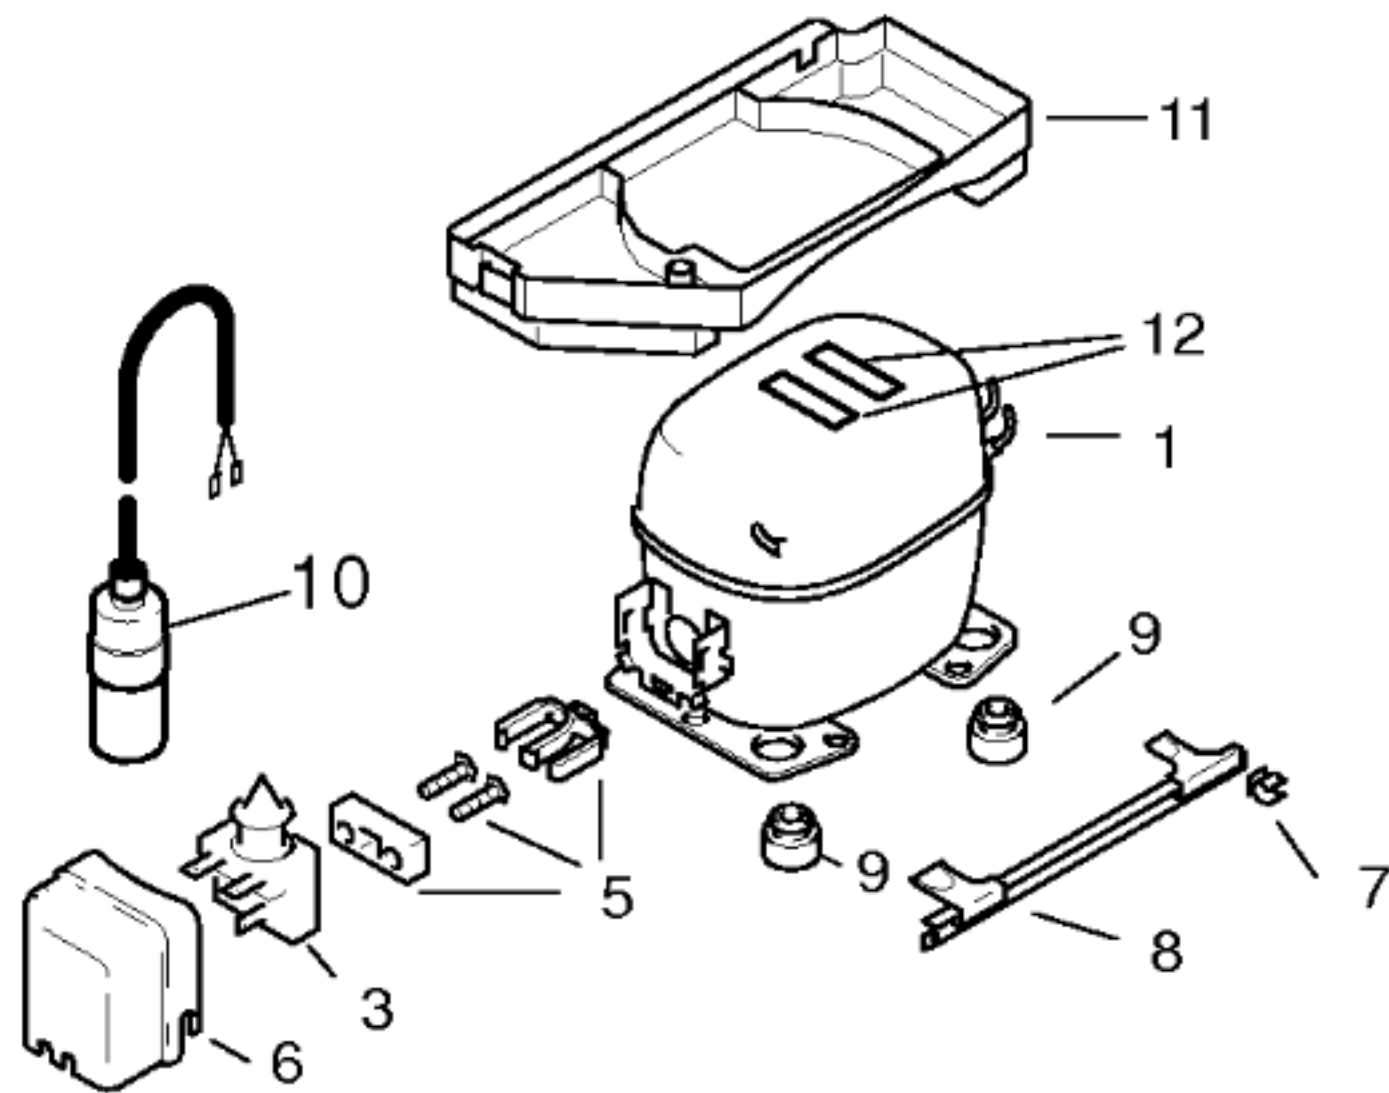

|      | V01                 | V02,V03              |  |
|------|---------------------|----------------------|--|
| Pos. | Aspera<br>BPK 1084Y | Danfoss<br>TLY 6 KK2 |  |
| 1    | 14 2101             | 14 2058              |  |
| 2    |                     |                      |  |
| 3    | 18 0819             | 15 1055              |  |
| 4    |                     |                      |  |
| 5    | 17 0882             | 15 0760              |  |
| 6    | 17 0881             | 15 1072              |  |
| 7    | 16 9319             | 16 9319              |  |
| 8    | 26 4879             | 27 1375              |  |
| 9    | 05 0166             | 05 0166              |  |
| 10   |                     |                      |  |
| 11   | 36 5099             | 36 5099              |  |
| 12   | 05 6008             | 05 6008              |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |           |           |       |
|--------------------------------------------------------|--|-----------|-----------|-------|
| Verdichter/Compressor/Compresseur                      |  | Aspera    | Danfoss   |       |
| Typ/Type                                               |  | BPK 1084Y | TLY 6 KK2 |       |
| Förderleistung/Delivery/Débit                          |  | l/h       | 1201      | 1026  |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A         | 3,6       | 4,4   |
| Widerstand/Resistance/Résistance Ha/main/prin          |  | W         | 29,6      | 34,0  |
| Hi/aux                                                 |  | W         | 39,1      | 31,0  |
| Temp.-Regler/Thermostat                                |  | Ranco     |           |       |
| Typ/Type                                               |  | K59       |           |       |
| Regelstellung/Position                                 |  | kalt      | warm      |       |
| Schaltwerte/Switching values                           |  | "warm"    | +5,2      | +5,2  |
| Valeurs de commutation                                 |  | "kalt"    | -32,0     | -15,0 |
| Füllmenge/Fill.quantity/Charge                         |  | R600a     | *         |       |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W         | 79        | 68    |
| Heizung/Heater/Chauffage                               |  |           |           |       |
| Widerstand/Resistance/Résistance                       |  | W         |           |       |
| Leistung/Power/Puissance                               |  | W         |           |       |
| Ventilator/Blower/Ventilateur                          |  |           |           |       |
| Widerstand/Resistance/Résistance                       |  | W         |           |       |
| Temp.-Regler/Thermostat                                |  |           |           |       |
| Magnetventil/Magnetic valve/Electrovanne               |  |           |           |       |
| Widerstand/Resistance/Résistance                       |  | W         |           |       |
| Spannung/Voltage/Tension                               |  | V         |           |       |

\* siehe Typenschild