



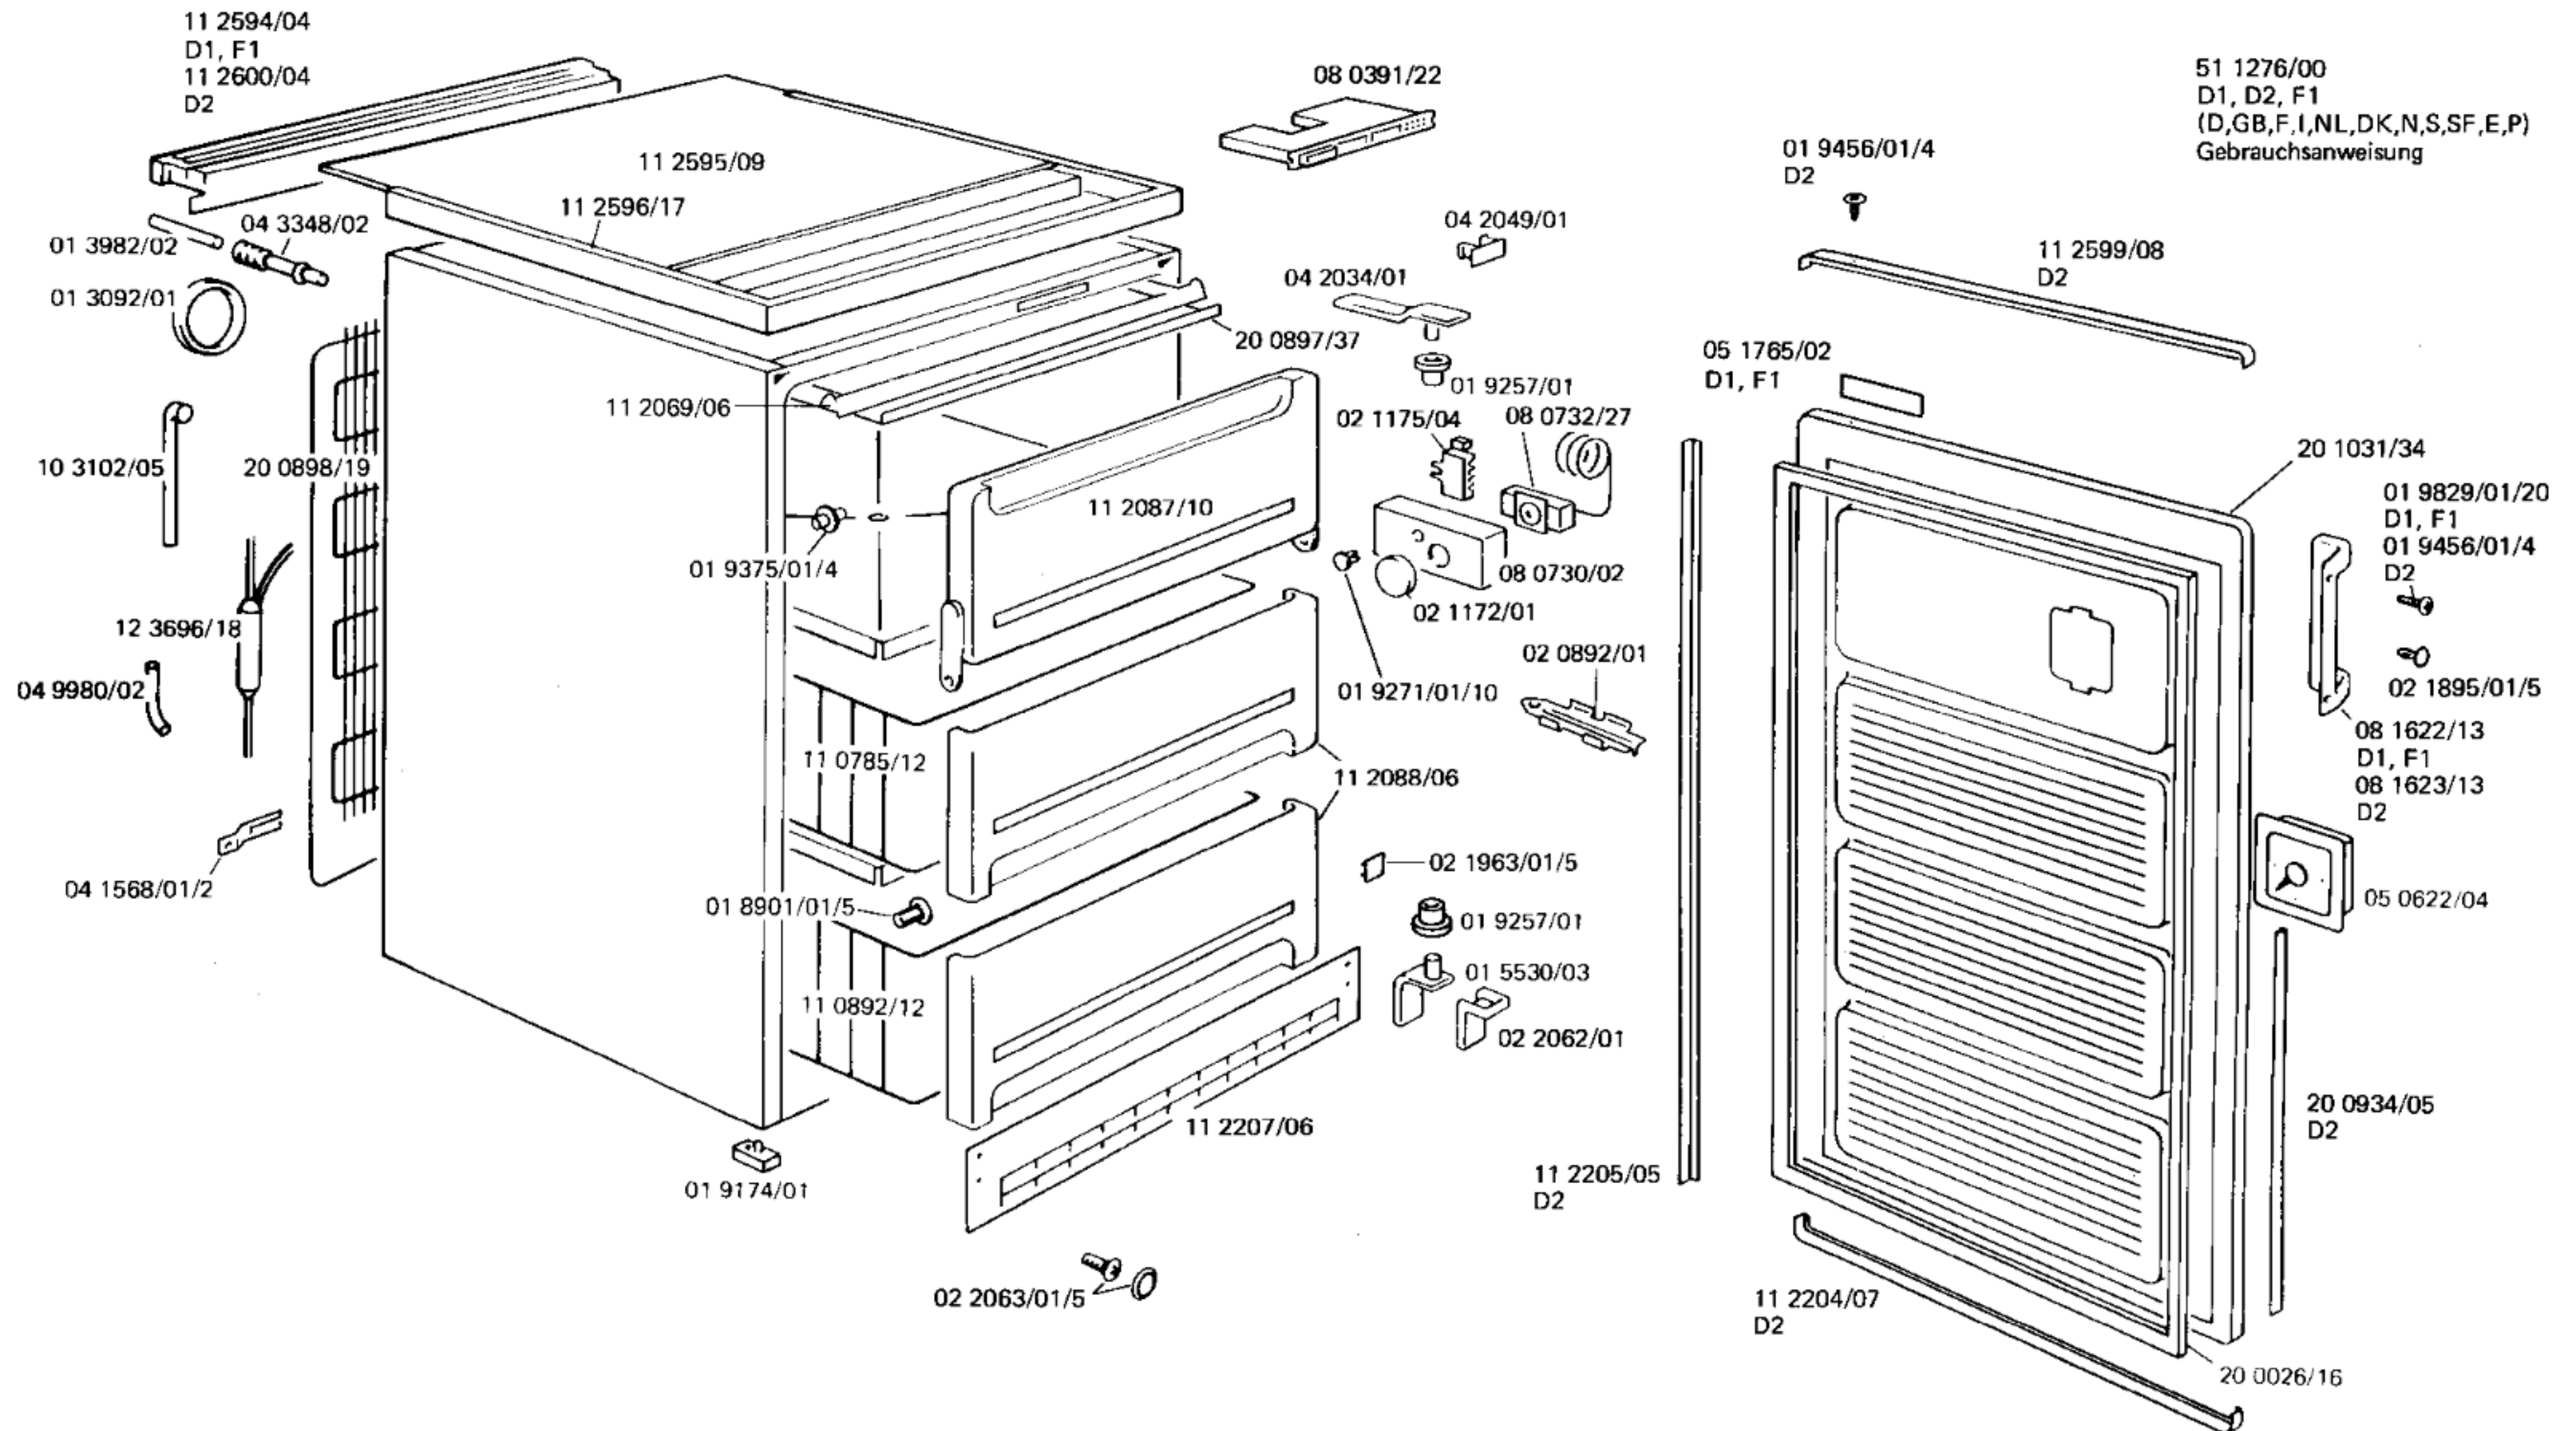

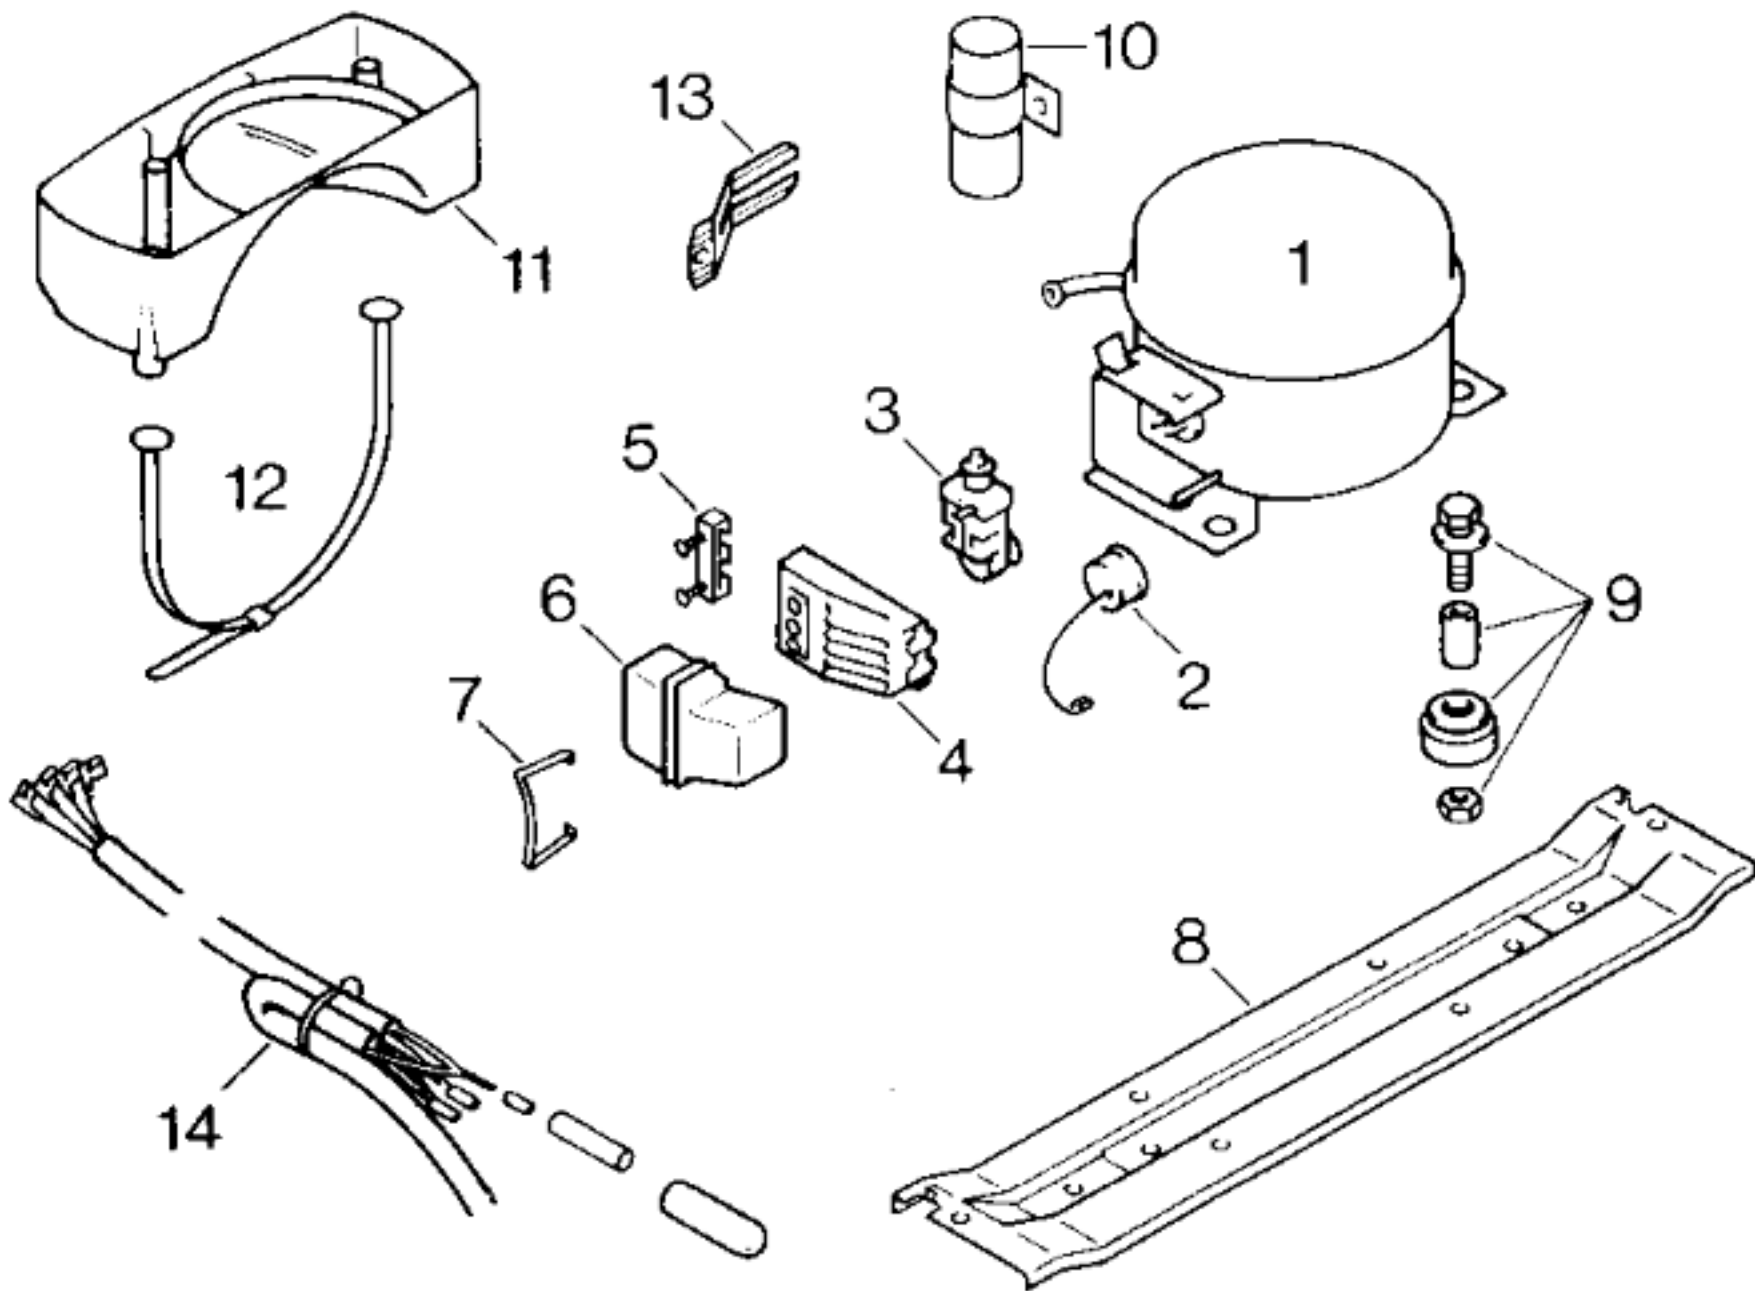

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera		
Typ/Type		BY 1112 A		
Förderleistung/Delivery/Débit		l/h 1060		
Anlaufstrom/Starting current/Cour. de démarrage		A 8,5		
Widerstand/Resistance/Résistance		Ha/main/prin. Ω 17,9		
		Hi/aux Ω 43,7		
Temp.-Regler/Thermostat		M + J		
Typ/Type		TF 57 SF		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$ -29 -21		
Valeurs de commutation		„aus“ -36 -26		
(„abtauen“ od.)		„alarm“ -20 -15		
Füllmenge/Fill.quantity/Charge		R12 g 150		
Anschlußwert/Conn.load/Puiss. connectée		W 120		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	Aspera			
1	14 0166/45			
2	02 2337/16			
3	02 2342/16			
4	05 1748/06			
5				
6	05 1746/01			
7	02 2339/01			
8	11 1567/03			
9	05 0166/05			
10				
11				
12				
13				
14				