





BIS-G 21 DISPENSER




203C4474G233 197D1078P032



TIME DELAY
CONTROL MODULE
CONNECTORS



WR4441
ND11303

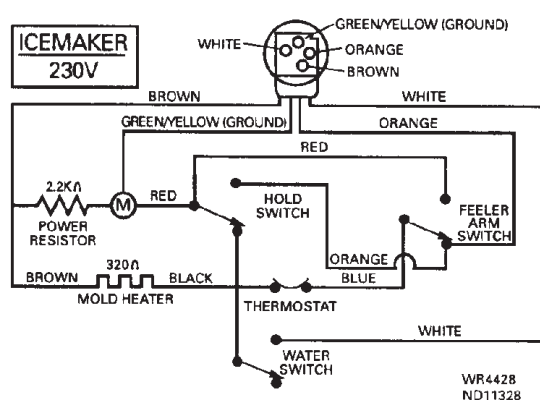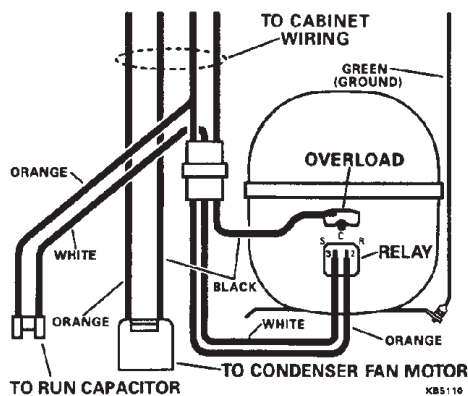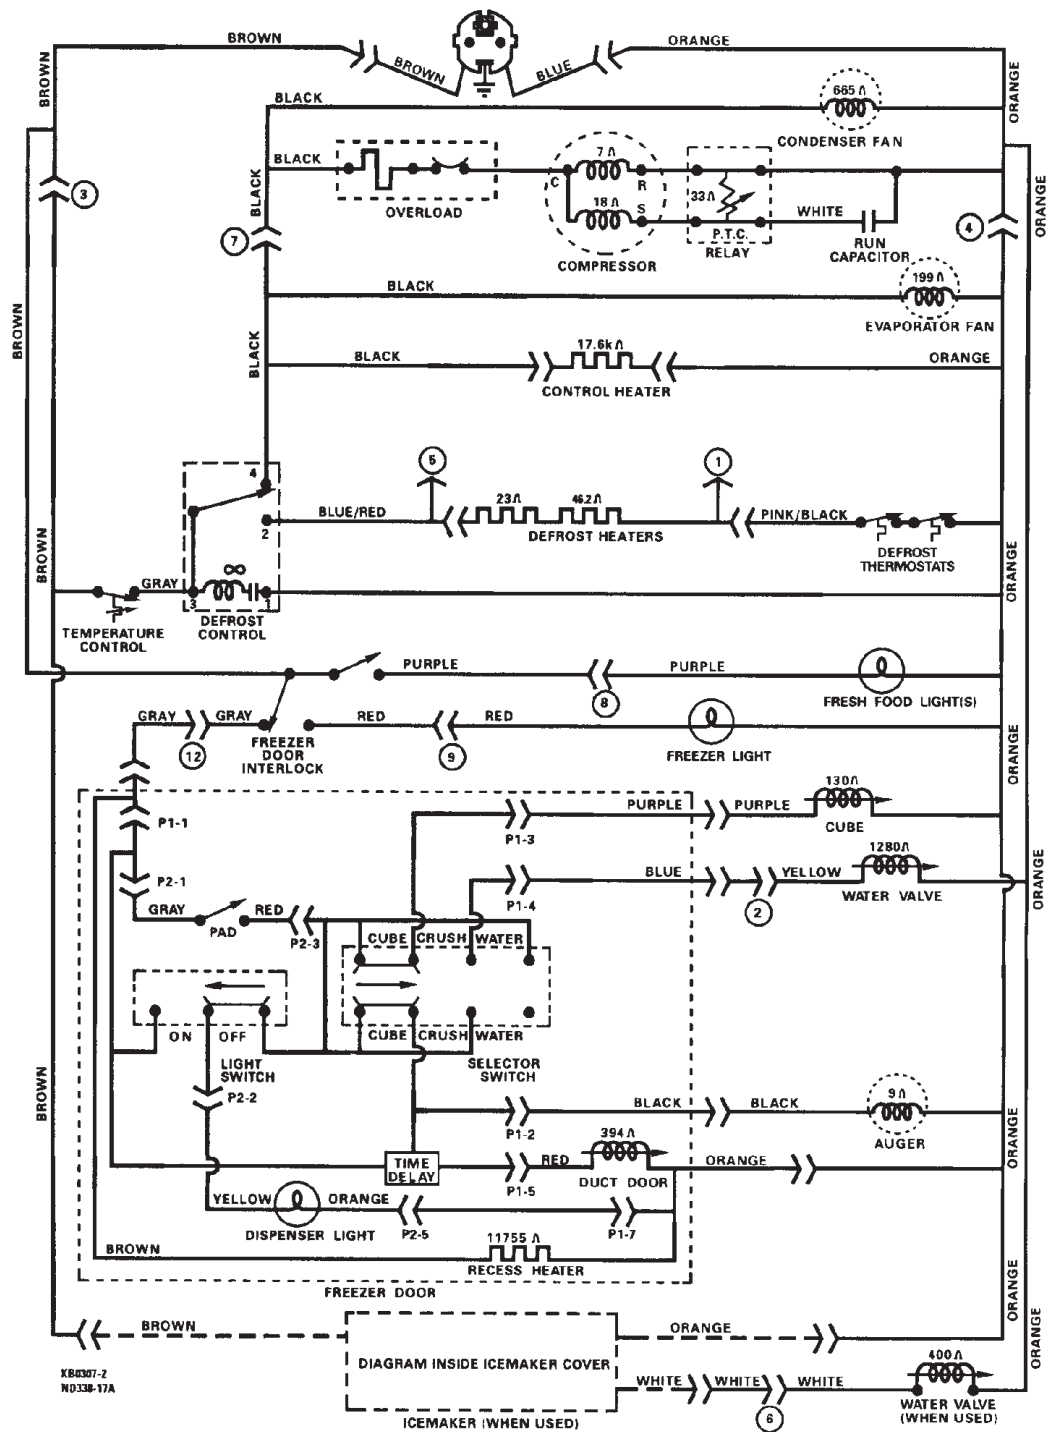

DISCONNECT POWER CORD BEFORE SERVICING**IMPORTANT - RECONNECT ALL GROUNDING DEVICES**

All parts of this appliance capable of conducting electrical current are grounded. If grounding wires, screws, straps, clips, nuts or washers used to complete a path to ground are removed for service, they must be returned to their original position and properly fastened.

ELECTRICAL COMPONENT OPERATION

Fz. Temperature Control (Pos. 5) (-20.5)-(-25.5)°C

Defrost Control @ 230V~50Hz. 14 hrs @ 32 min

Defrost Thermostat (2) 15.6-(-2.2)°C

PERFORMANCE: FOOD LOAD, NO DOOR OPENINGS

Control Position 5/5 and
Ambient Temperature of:

	<u>21°C</u>	<u>32°C</u>
Fresh Food, °C	4	3
Frozen Food, °C	-19	-20
Run Time, %	40%	74%

REFRIGERATION SYSTEM

Refrigerant Charge (R134a) 5.75 See Rating Plate

Compressor @ 230V~50Hz. 1058 BTU-310W


Compressor Capacity Test (see Service Handbook)

Minimum Vacuum @ 2 minutes 13 in/-43 kPa

Minimum Equalized Pressure

@ 21°C 47 PSIG 324 kPa

@ 32°C 61 PSIG 420 kPa

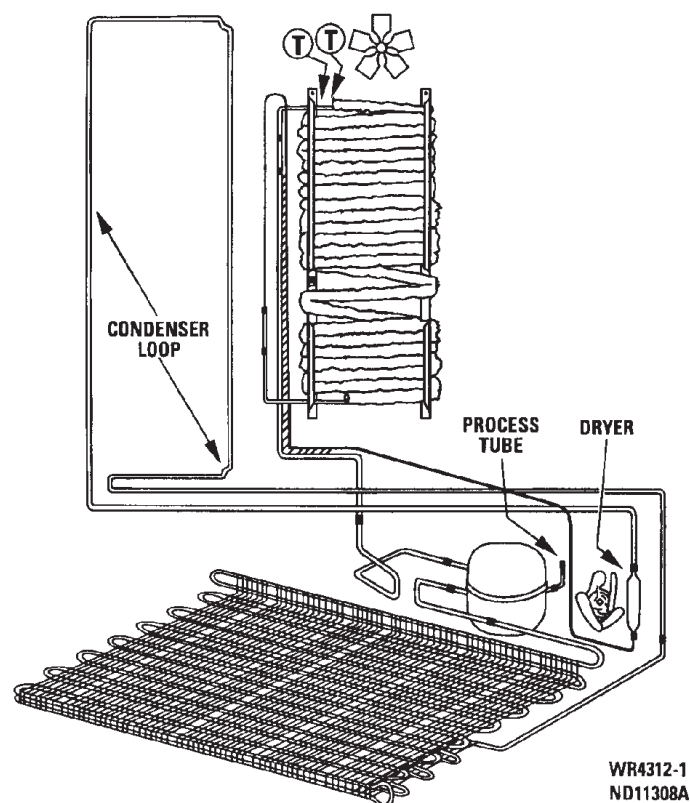**IMPORTANT SAFETY NOTICE**

This information is intended for use by individuals possessing adequate backgrounds of electrical, electronic and mechanical experience. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible for the interpretation of this information, nor can it assume any liability in connection with its use.

AIR FLOW