


**BOSCH**

GSL 260 – 0 705 254 527–F1
 – 0 705 254 528–CH1
 – 0 705 254 529–D1

GSL 260 – 0 705 254 536–D2
 – 0 705 254 537–F2
 – 0 705 254 538–CH1

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident – Nummern – Konstante
 3740

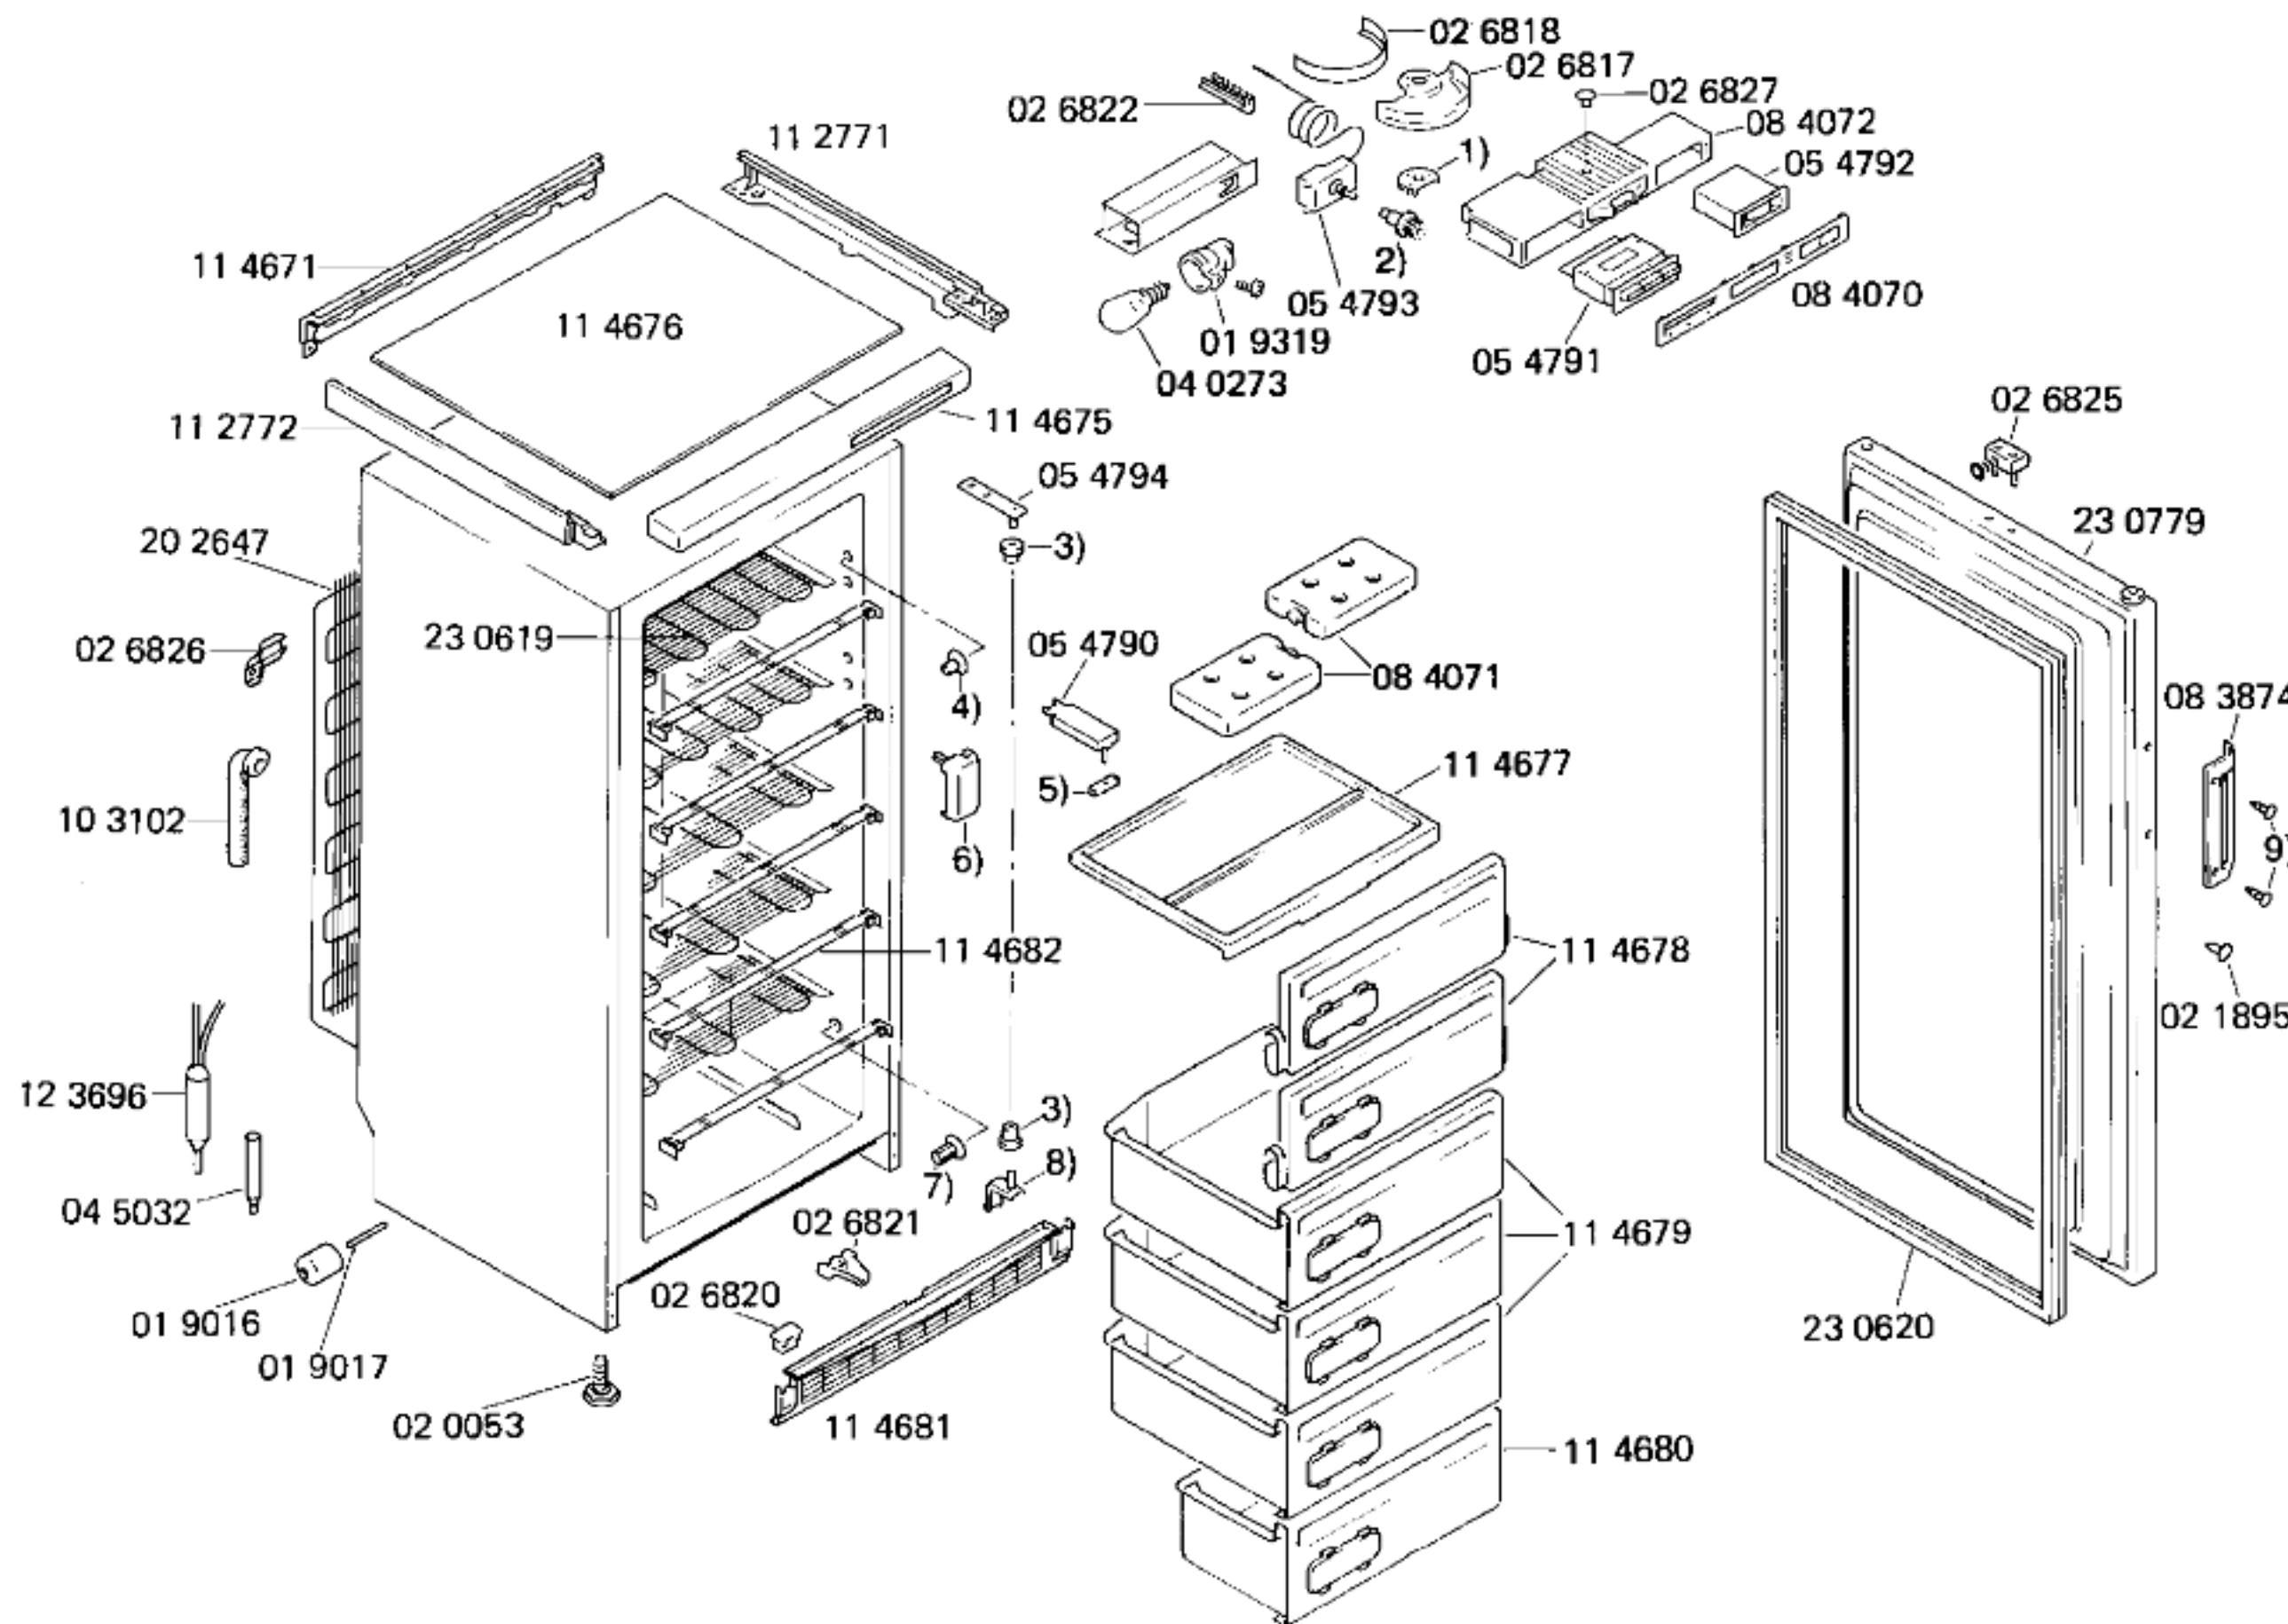

51 1941
 D1,D2,F1,F2,CH1,CH2
 Gebrauchsanweisung
 (D,GB,F,I,NL,P,SF,DK,
 E,S)

- 1) 02 6816
- 2) 02 6819
- 3) 01 2418
- 4) 02 6824
- 5) 02 6815
- 6) 02 6823
- 7) 01 8901
- 8) 05 4795
- 9) 01 9081


**BOSCH**

GSL 260 – 0 705 254 527–F1
 – 0 705 254 528–CH1
 – 0 705 254 529–D1

GSL 260 – 0 705 254 536–D2
 – 0 705 254 537–F2
 – 0 705 254 538–CH1

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident – Nummern – Konstante
 3740

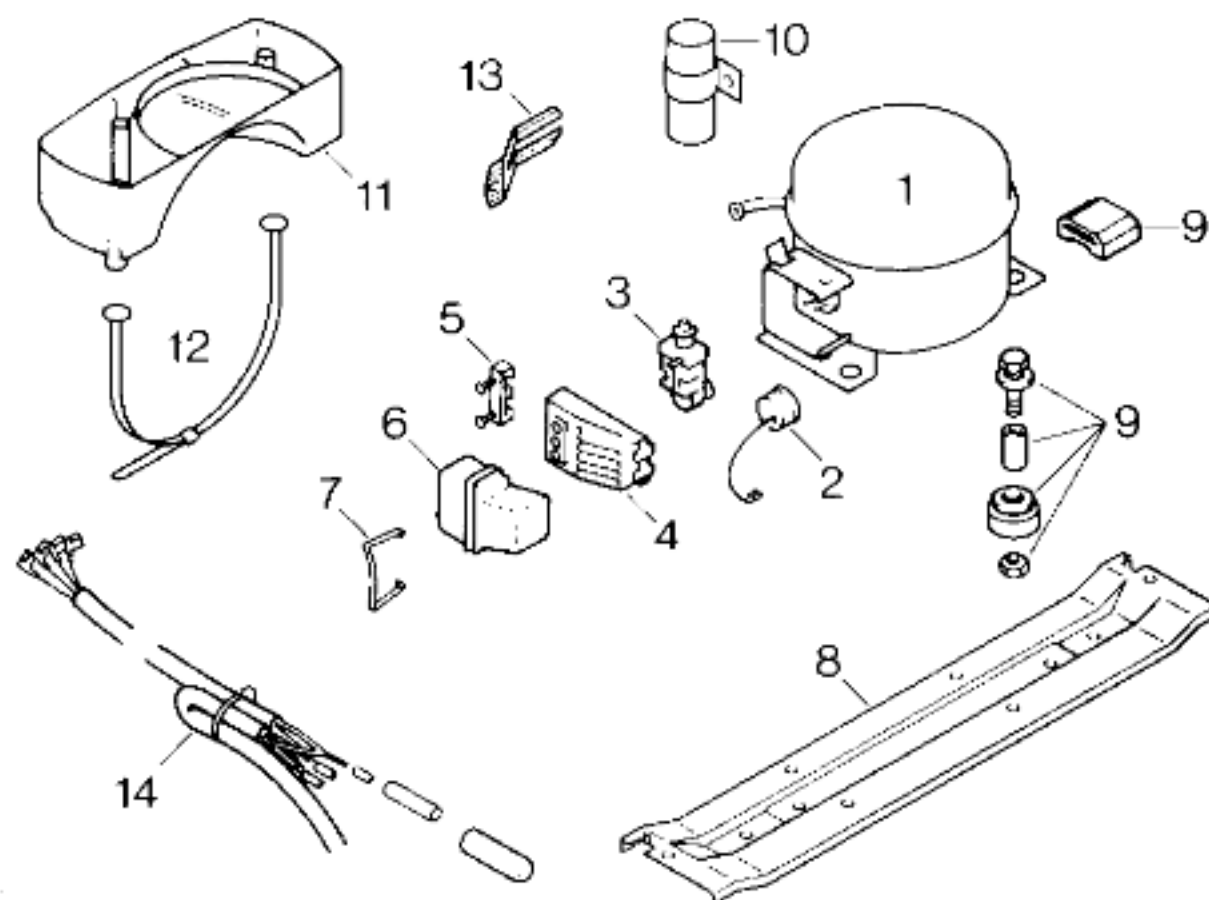

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1116 A	FR 8,5 A		
Förderleistung/Delivery/Débit		l/h	1450	1430	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,9	10,3	
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	11,7	12,2
		Hi/aux	Ω	37,7	13,7
Temp.-Regler/Thermostat			Danfoss		
Typ/Type			077 B 2054		
Reglerstellung/Position			kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation („abtauen“ od.)		„ein“	°C	- 24	- 16
		„aus“		- 34	- 24
		„alarm“		- 19	- 12
Füllmenge/Fill.quantity/Charge		R12	g	185	
Anschlußwert/Conn.load/Puiss. connectée			W	150	
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance			Ω		
Leistung/Power/Puissance			W		
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance			Ω		
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance			Ω		
Spannung/Voltage/Tension			V		

Pos.	D1,F1,CH1	D2,F2,CH2		
	Aspera	Danfoss		
1	14 0312	14 0157		
2	02 6559			
3	02 2342	02 0108		
4	05 1748			
5		02 1361		
6	05 1746	05 1413		
7	02 2339			
8				
9	05 0166			
10				
11				
12				
13				
14				