

**BOSCH**


GSA 260-0 705 254 506-D1
 - 0 705 254 511-D2
 - 0 705 254 518-D3

GSA 260-0 705 254 523-F1
 - 0 705 254 530-D4
 - 0 705 254 531-F2

GSA 260-0 705 254 539-D5

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident - Nummern - Konstante
 3740

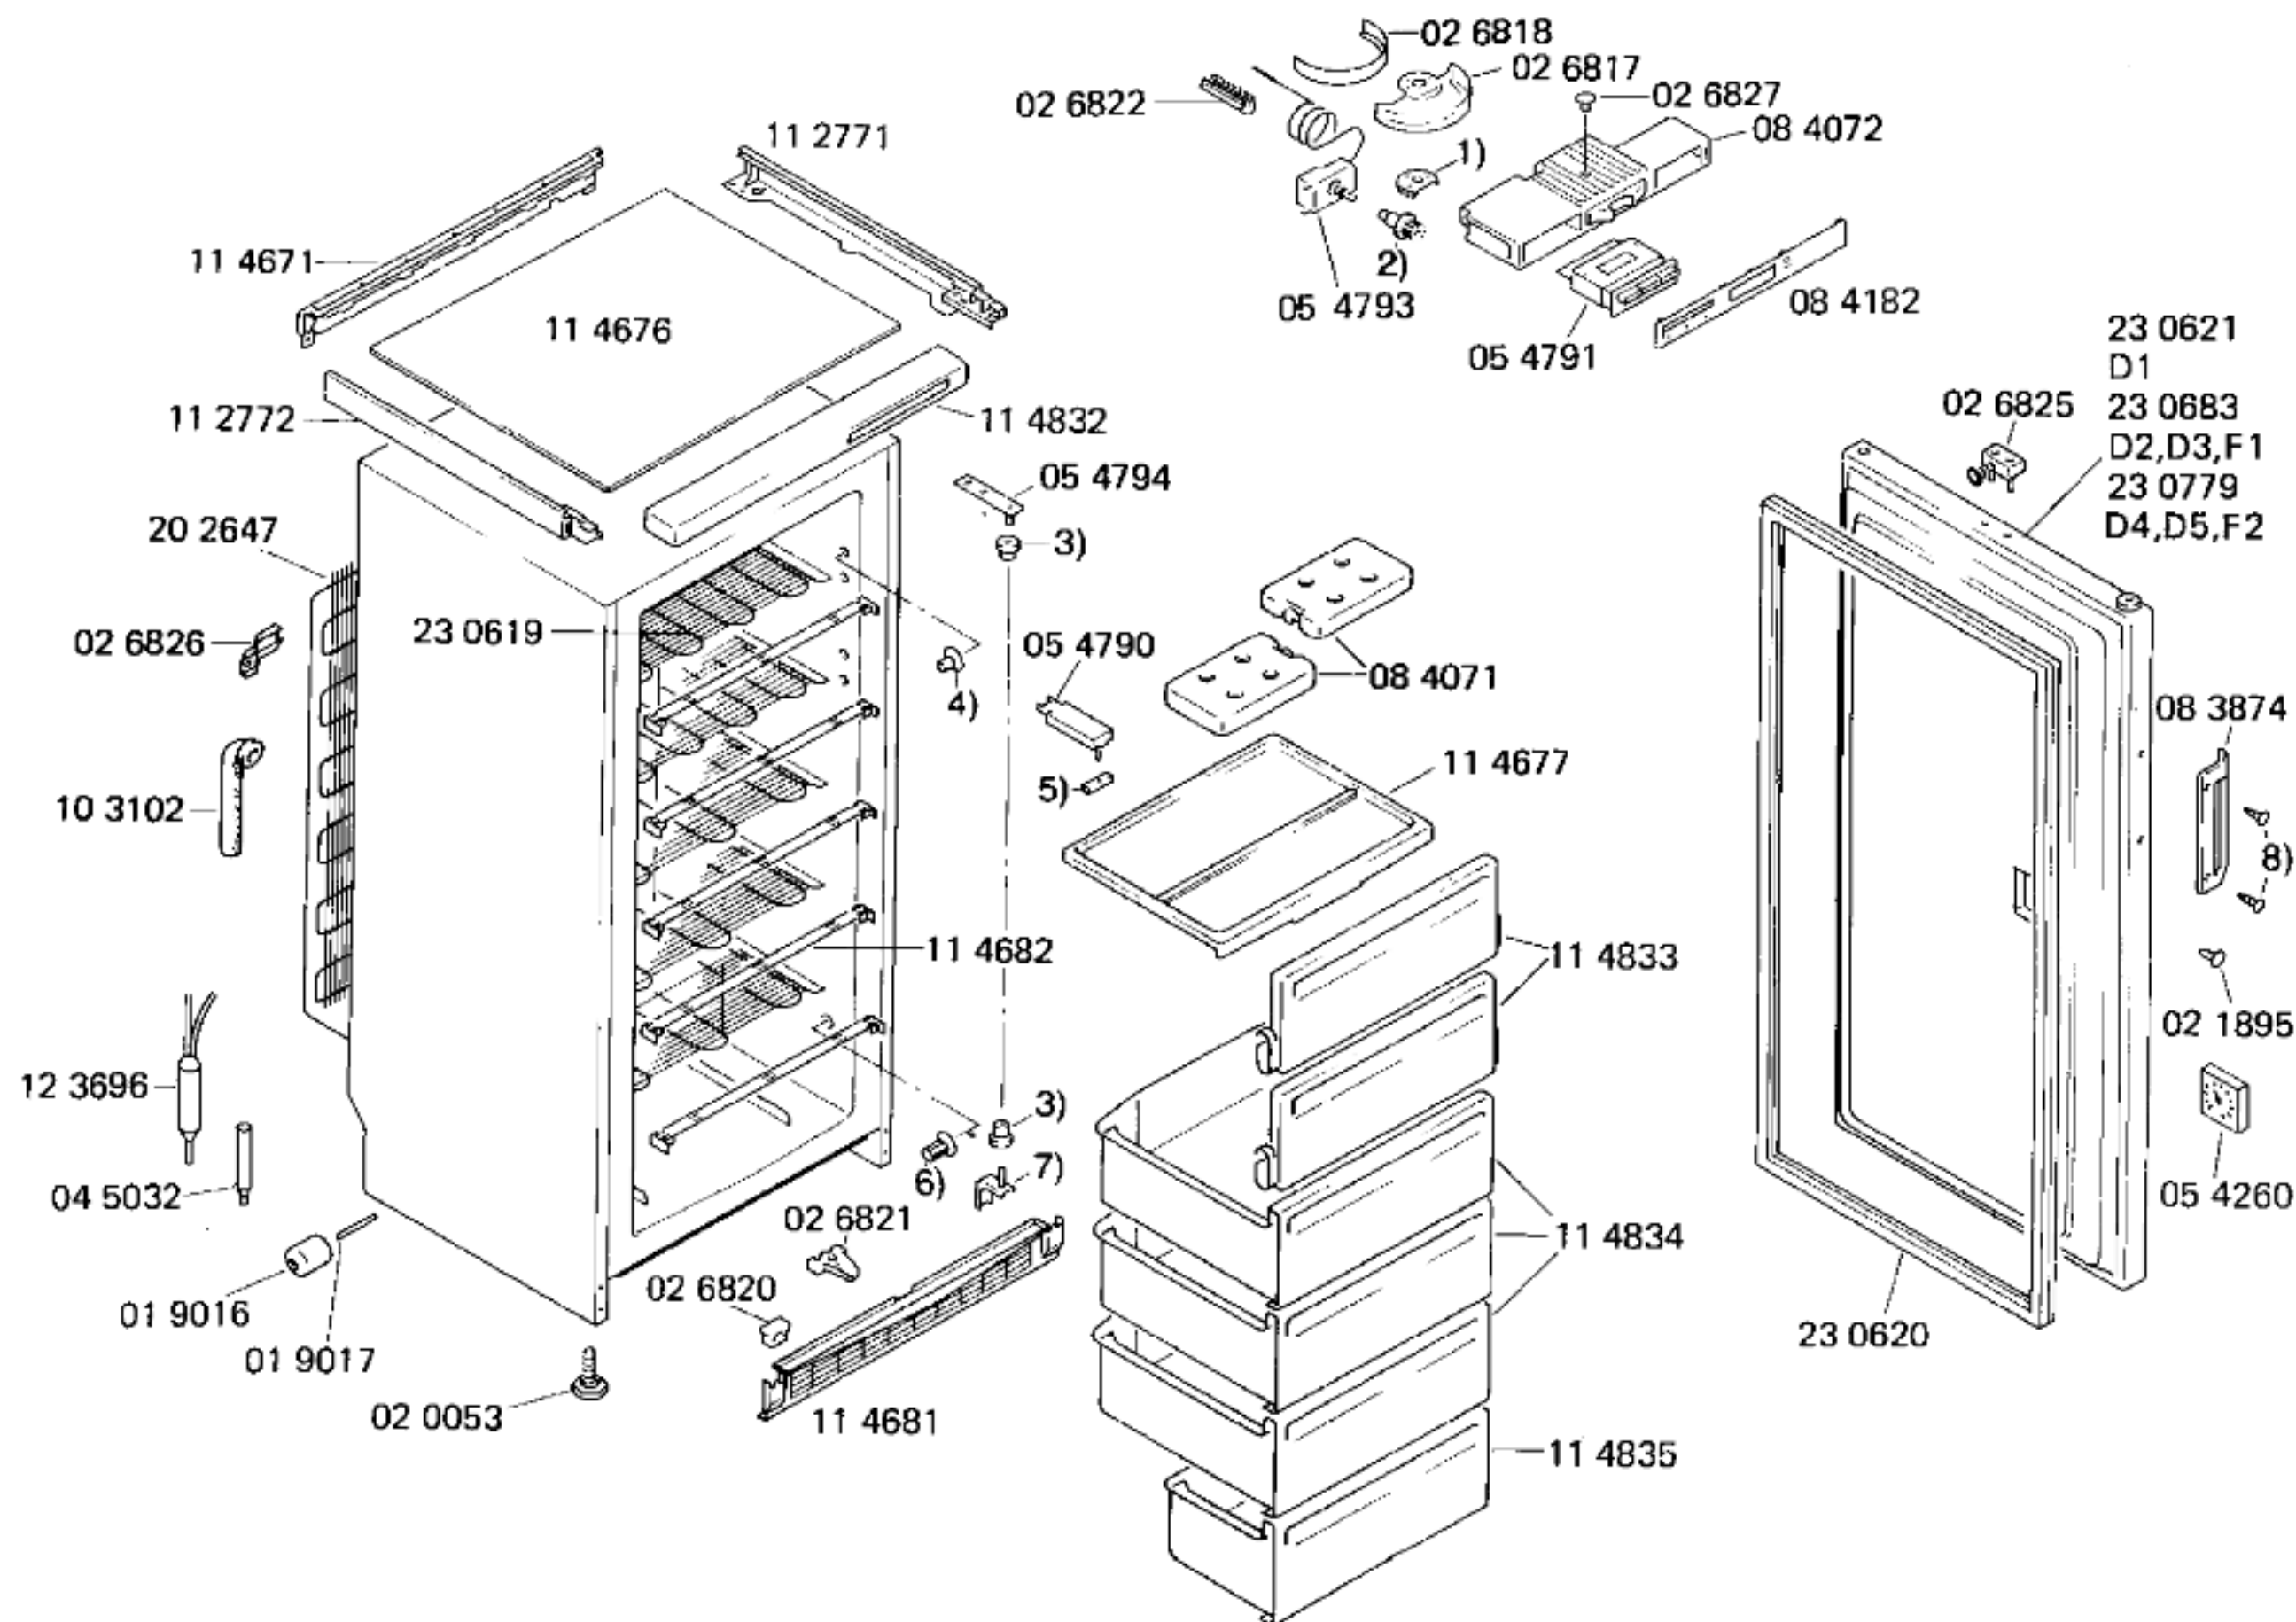

51 1941
 D1,D2,D3,D4,D5,F1,F2
 Gebrauchsanweisung
 (D,GB,F,I,NL,P,SF,DK,
 E,S)

- | | |
|----------|------------|
| 23 0621 | 1) 02 6816 |
| D1 | 2) 02 6819 |
| 23 0683 | 3) 01 2418 |
| D2,D3,F1 | 4) 02 6824 |
| 23 0779 | 5) 02 6815 |
| D4,D5,F2 | 6) 01 8901 |
| | 7) 05 4795 |
| | 8) 01 9081 |

**BOSCH**


GSA 260- 0 705 254 506-D1
 - 0 705 254 511-D2
 - 0 705 254 518-D3

GSA 260- 0 705 254 523-F1
 - 0 705 254 530-D4
 - 0 705 254 531-F2

GSA 260 - 0 705 254 539-D5

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident - Nummern - Konstante
 3740

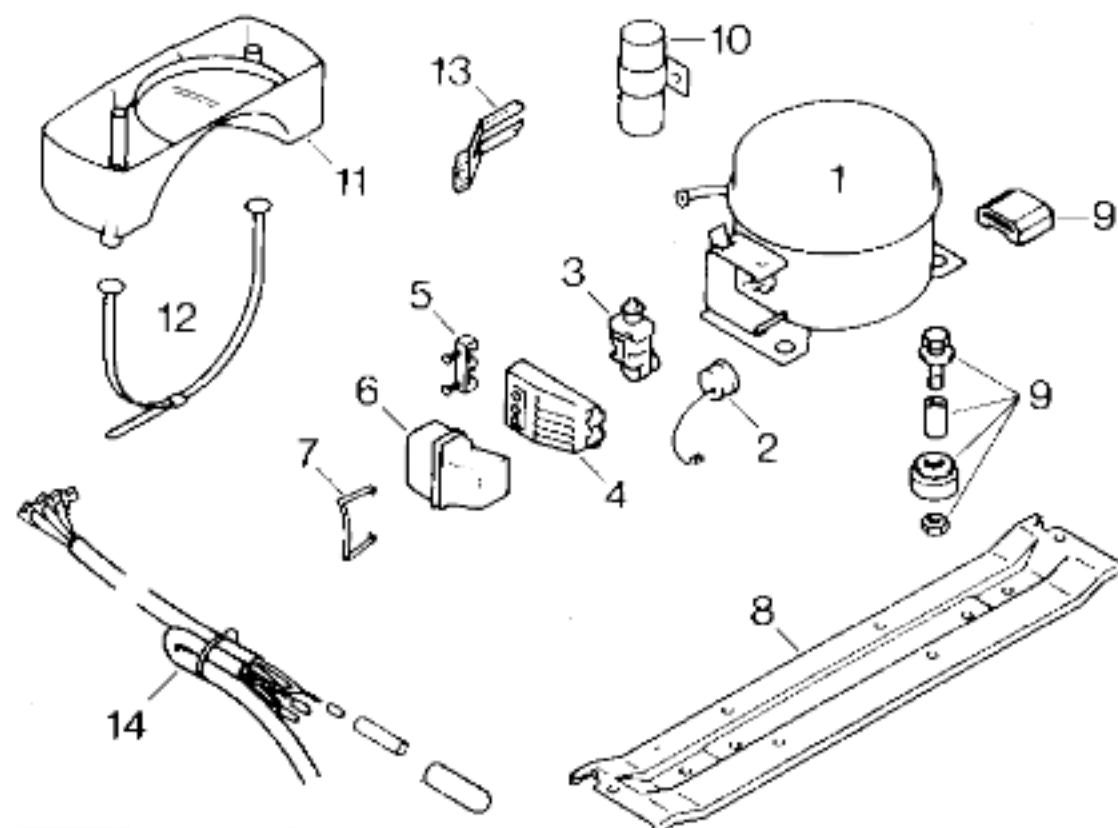

Pos.	D1,D2,D3,D4,		D5		
	F1,F2	Aspera			
1	14 0312	14 0157			
2	02 6559				
3	02 2342	02 0108			
4	05 1748				
5		02 1361			
6	05 1746	05 1413			
7	02 2339				
8					
9	05 0166				
10					
11					
12					
13					
14					

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1116 A	FR 8,5 A		
Förderleistung/Delivery/Débit	l/h	1450	1430		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,9	10,3		
Widerstand/Resistance/Résistance	Ha/main/prin.	11,7	12,2		
	Hi/aux	37,7	13,7		
Temp.-Regler/Thermostat		Danfoss			
Typ/Type		077 B 2054			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/	„ein“	- 24	- 16		
Valeurs de commutation	„aus“	- 34	- 24		
(„abtauen“ od.)	„alarm“	- 19	- 12		
Füllmenge/Fill.quantity/Charge	R12	g	185		
Anschlußwert/Conn.load/Puiss. connectée		W	150		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			