



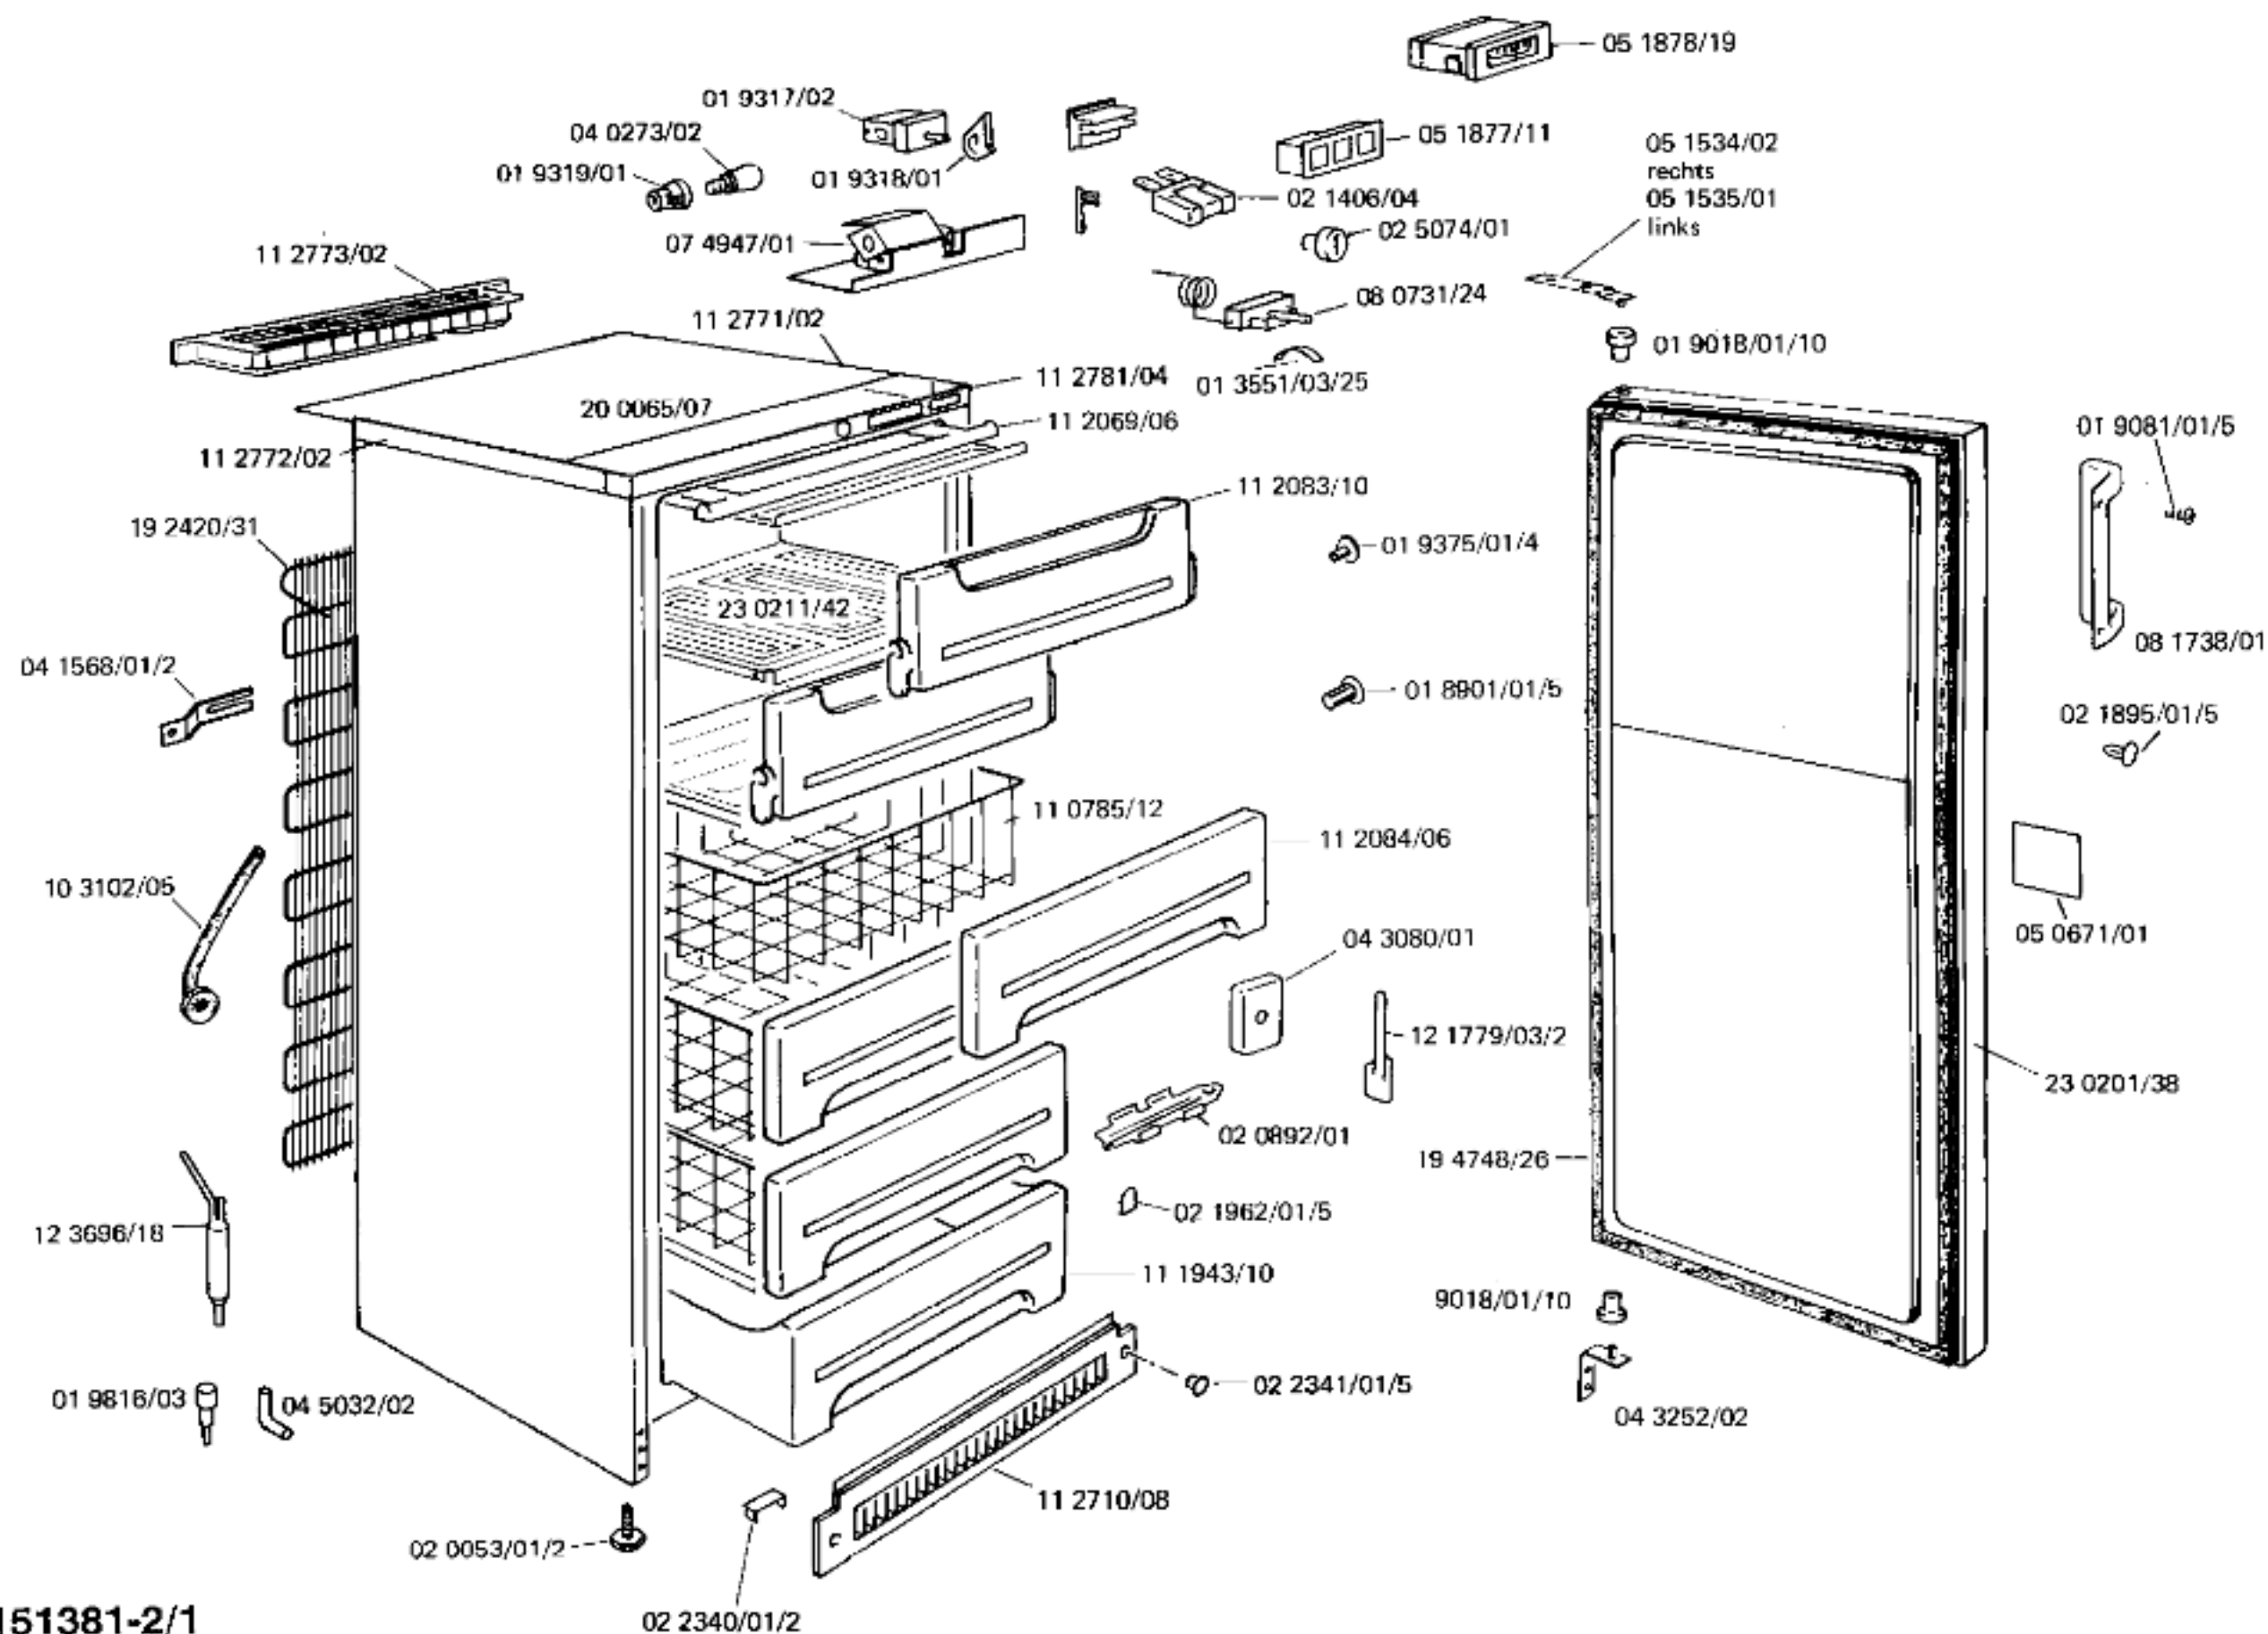

51 1081/00
D1, D2, CH1, F1, CH2, F2
(D,GB,F,I,NL,DK,S,SF,P,N,E)
Gebrauchsanweisung

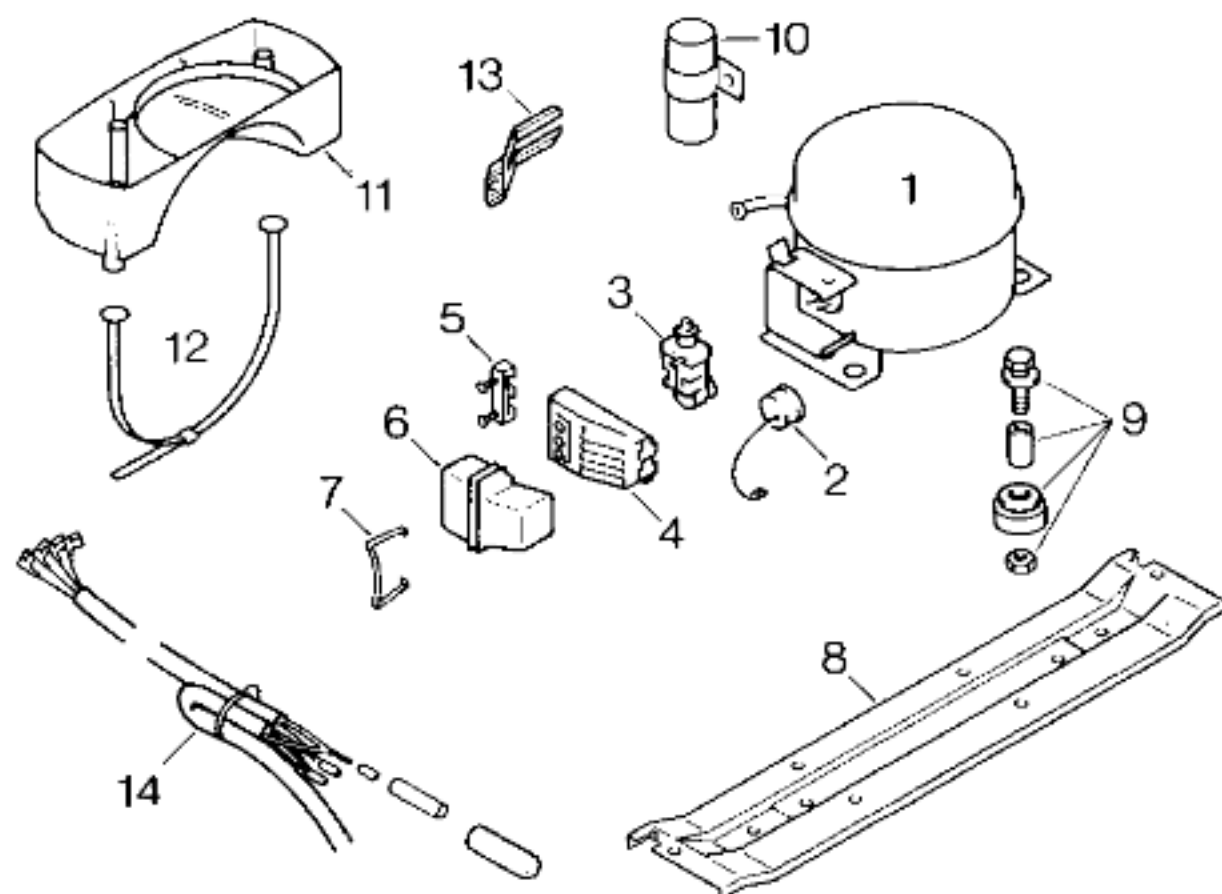

TECHNISCHE DATEN / TECHNICAL DATA / DONNÉES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita		
Typ/Type		FR 7,5 A	FN 73 F 13 S		
Förderleistung/Delivery/Débit	l/h	V 1250	V 1310		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,6	8,0		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	14,5	11,6		
	Hi/aux Ω	14,2	60,6		
Temp.-Regler/Thermostat		Ranco			
Typ/Type		A 56			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-26	-18		
Valeurs de commutation	„aus“	-34	-24		
	„abtauen“ od.) „alarm“	-20	-13		
Füllmenge/Fill quantity/Charge	R12	g	175		
Anschlußwert/Conn.load/Puiss. connectée		W	150		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω				
Leistung/Power/Puissance	W				
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				

Pos.	D2,CH1,F1	D1,CH2,F2		
	Danfoss	Matsushita		
1	14 0023/45	14 0107/44		
2		02 1733/09		
3	02 0108/27	02 1734/09		
4		05 1289/14		
5				
6	05 1413/05	05 1289/14		
7		02 1735/01/2		
8	11 1567/03			
9	05 0166/05			
10				
11				
12				
13				
14				