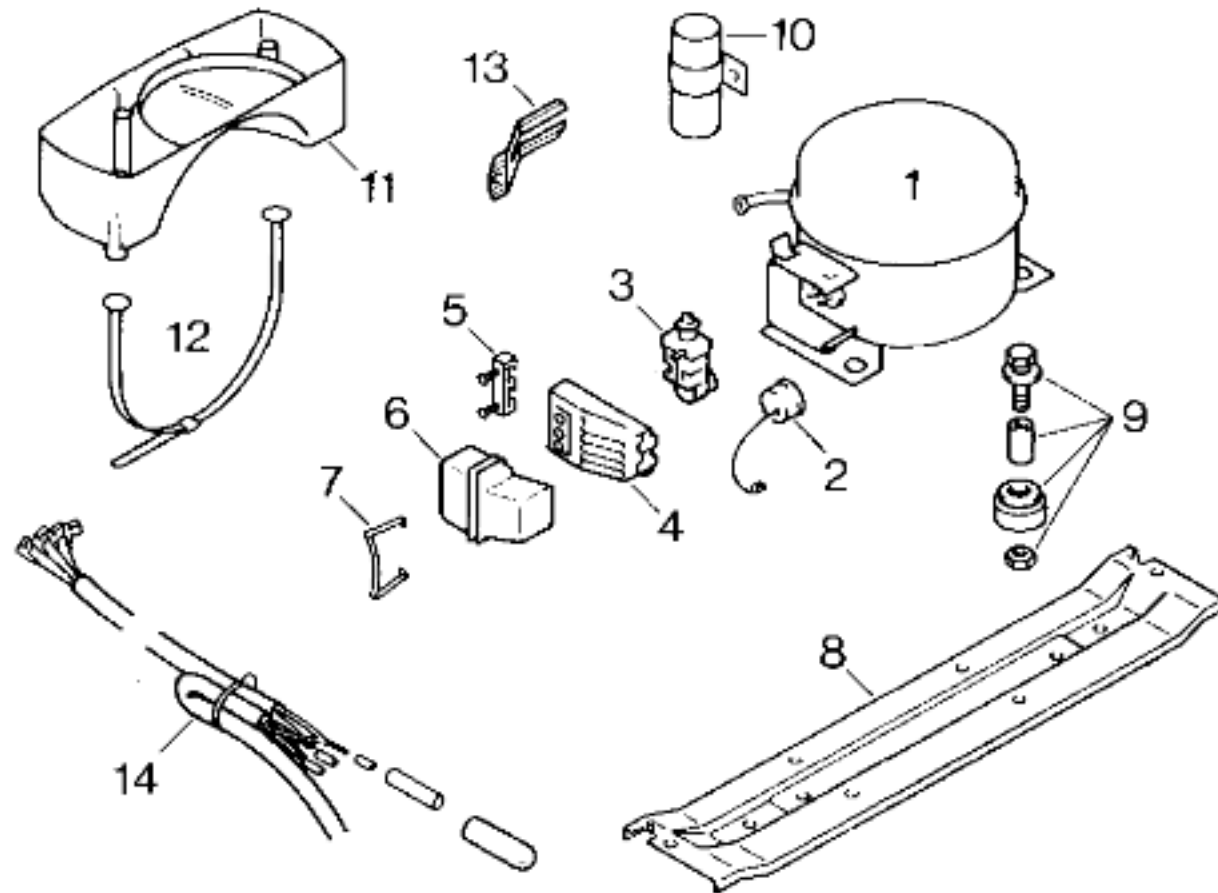



TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Typ/Type		Bosch	Danfoss		
Förderleistung/Delivery/Débit		l/h		V 792	TL 4 A		
Anlaufstrom/Starting current/Cour. de démarrage		A		9,4	7,8		
Widerstand/Resistance/Résistance		Ha/main/prin. Ω		18,0	23,8		
		Hi/aux Ω		24,0	19,7		
Temp. Regler/Thermostat		Typ/Type		Bosch			
Reglerstellung/Position				kalt	warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$		- 25	- 19		
Valeurs de commutation		„aus“		- 33	- 26		
		(„abtauen“ od.) „alarm“		- 20	- 15		
Füllmenge/Fill.quantity/Charge		R12	g	110			
Anschlußwert/Conn.load/Puiss. connectée			W	110			
Heizung/Heater/Chauffage							
Widerstand/Resistance/Résistance			Ω				
Leistung/Power/Puissance			W				
Ventilator/Blower/Ventilateur							
Widerstand/Resistance/Résistance			Ω				
Magnetventil/Magnetic valve/Electrovanne							
Widerstand/Resistance/Résistance			Ω				
Spannung/Voltage/Tension			V				

Pos.	Bosch	Danfoss		
1		13 1064/45		
2	07 2115/18			
3	07 1804/18	02 0108/27		
4	04 9865/05			
5				
6	04 9865/05	05 1413/05		
7				
8		*11 1838/03		
9	01 4895/02	*05 0166/05		
10				
11				
12				
13				
14		*05 1226/08		

*1 Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch