



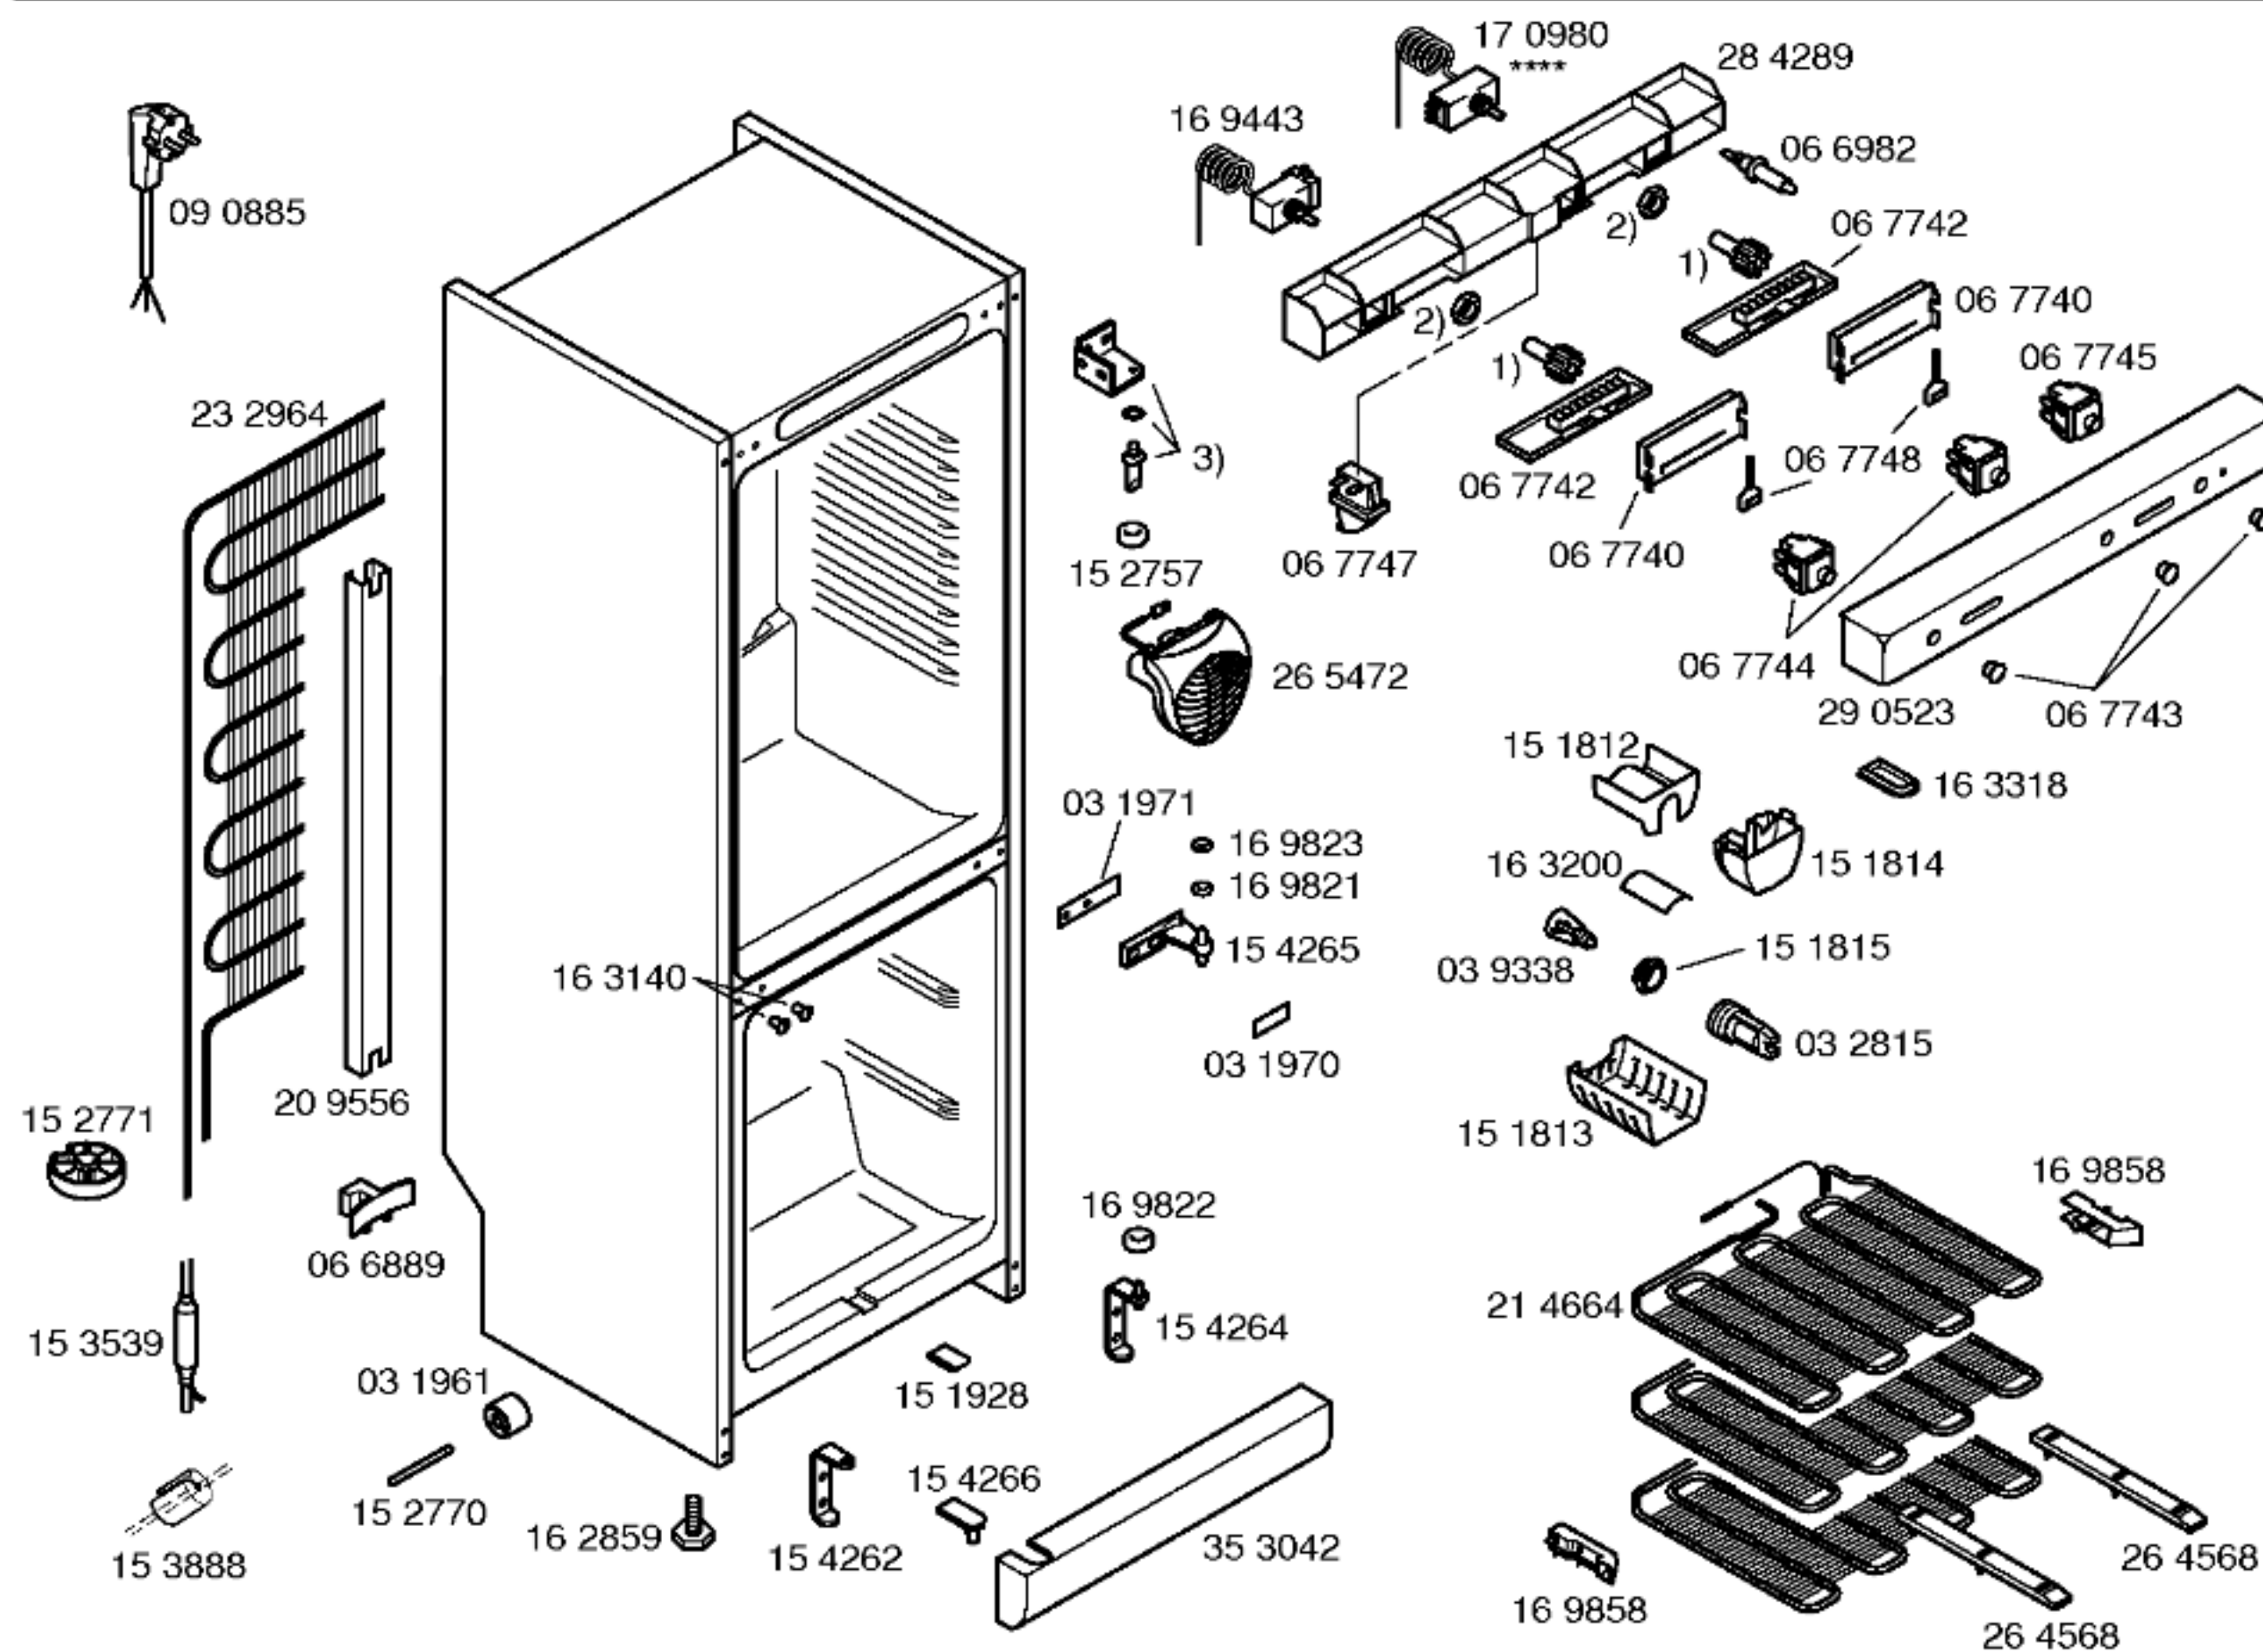


Libro de instrucciones
52 4512
(E,P,GB,F)

Instrucciones de montaje
51 9729
(D,GB,F,I,NL,E,P,GR)

1) 06 7746
2) 03 3058
3) 16 9346
Set

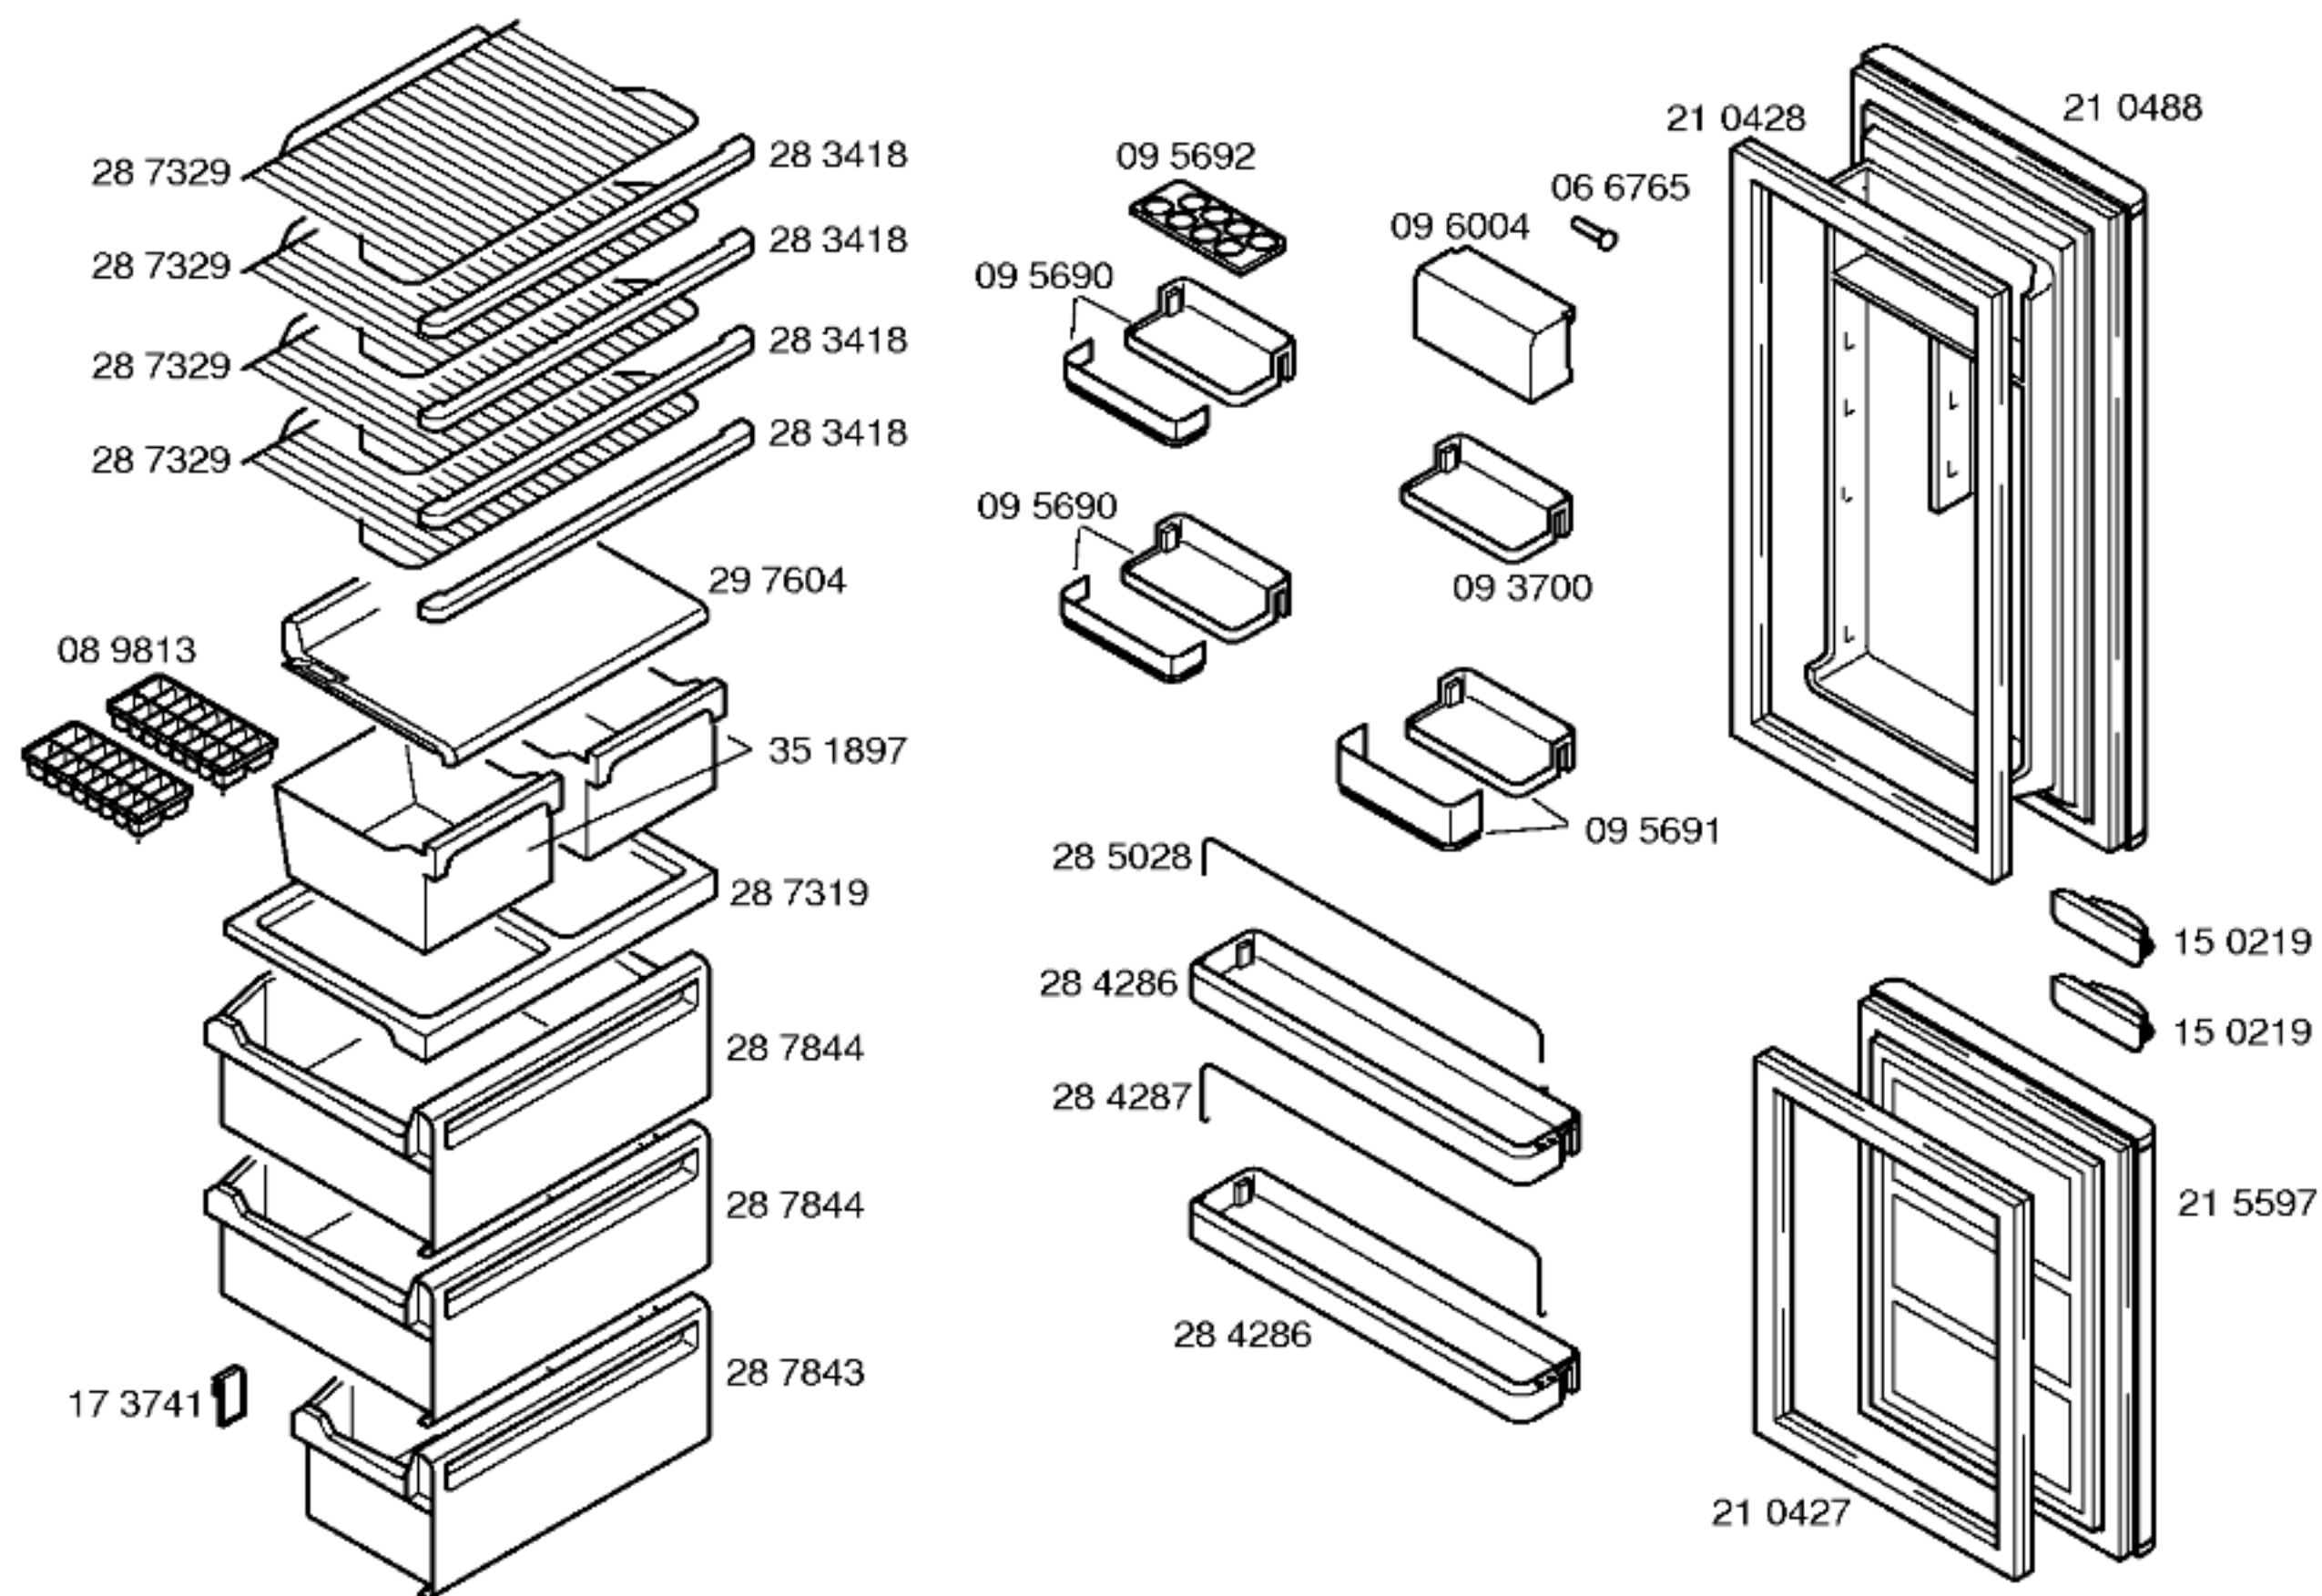

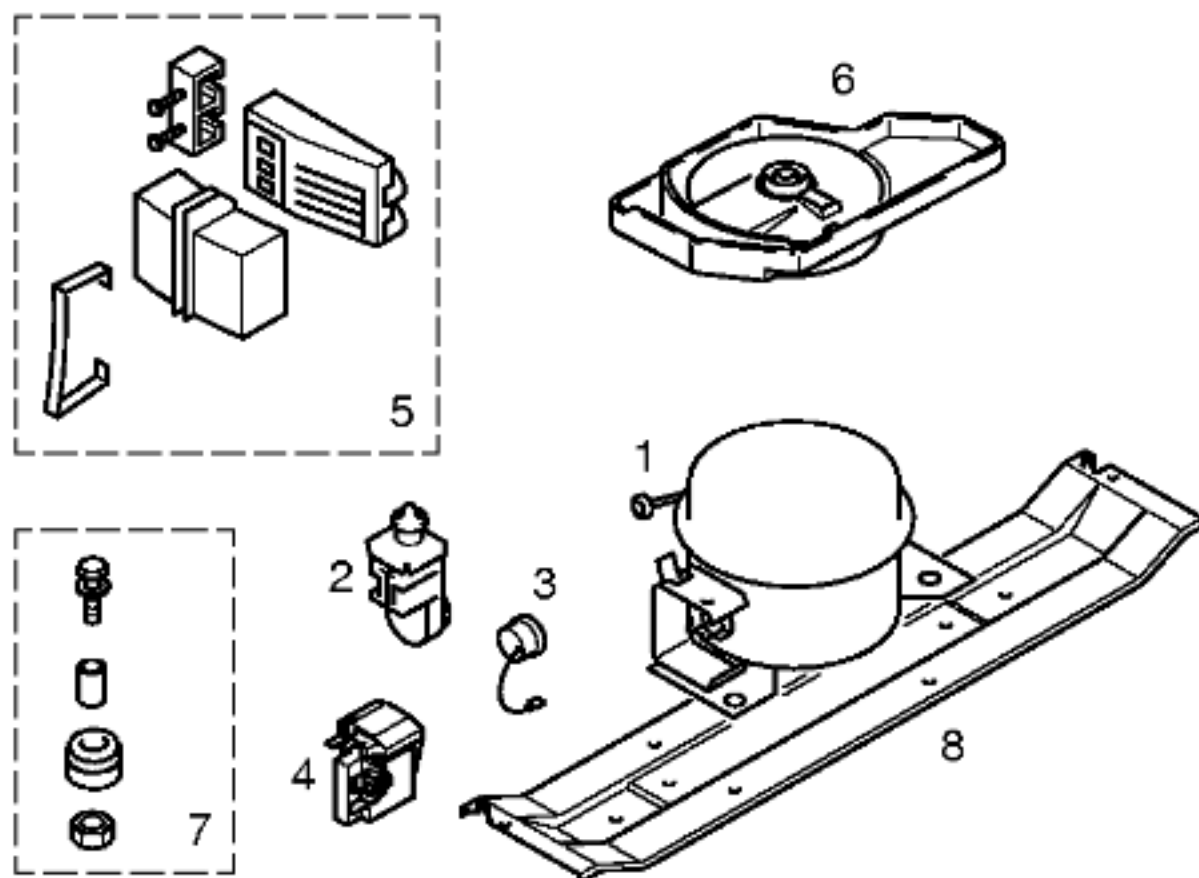

Pos.	*****			
	Aspera BPM1084Y	Gold Star NR69NAEG		
1	14 1723	14 2001		
2	15 4315			
3	16 7769			
4		17 1011		
5				
6	26 4123			
7	05 0166	05 0166		
8	28 8253	28 8253		
9				
10				
11				
12				
13				

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				

Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo	Aspera BPM1084Y	Gold Star NR69NAEG		
Förderleistung/Delivery/Debit/Aspiración l/h				
Anlaufstromm/Starting current/Cour.démarrage/Int.arranq. A	3,60			
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	29,60			
Hi/aux.	38,50			
Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo	Ranco K59-L6050 MIN. MAX.	Ranco K54-L2006 MIN. MAX.		
Reglerstellung/Position/Conexión				
Schaltwerte/Switching values/	..ein/conex.°C	+6°	-14°	-22°
Valeurs de commutation/Desconex.	..aus"/descon.	-11°	-28°	-20°
(..abtaven' od)	..alarm'	-10°	-18°	
Füllmenge/Fill. quantity/Charge/Carga R600a	g	*	*	
Anschlusswert/Comm. load/Puiss. Connect./Potenc.	W	71	83	
Heizung/Heater/Chauflage/Resistenc.descong. Widerstand/Resistance/Resistencia	Ohm			
Leistung/Power/Puissance/Potencia	W			
Ventilador/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia	Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia	Ohm			
Spannung/Voltage/Tension/Tensión	V			
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaquette de caractéristiques / Ver plaqueta de características