




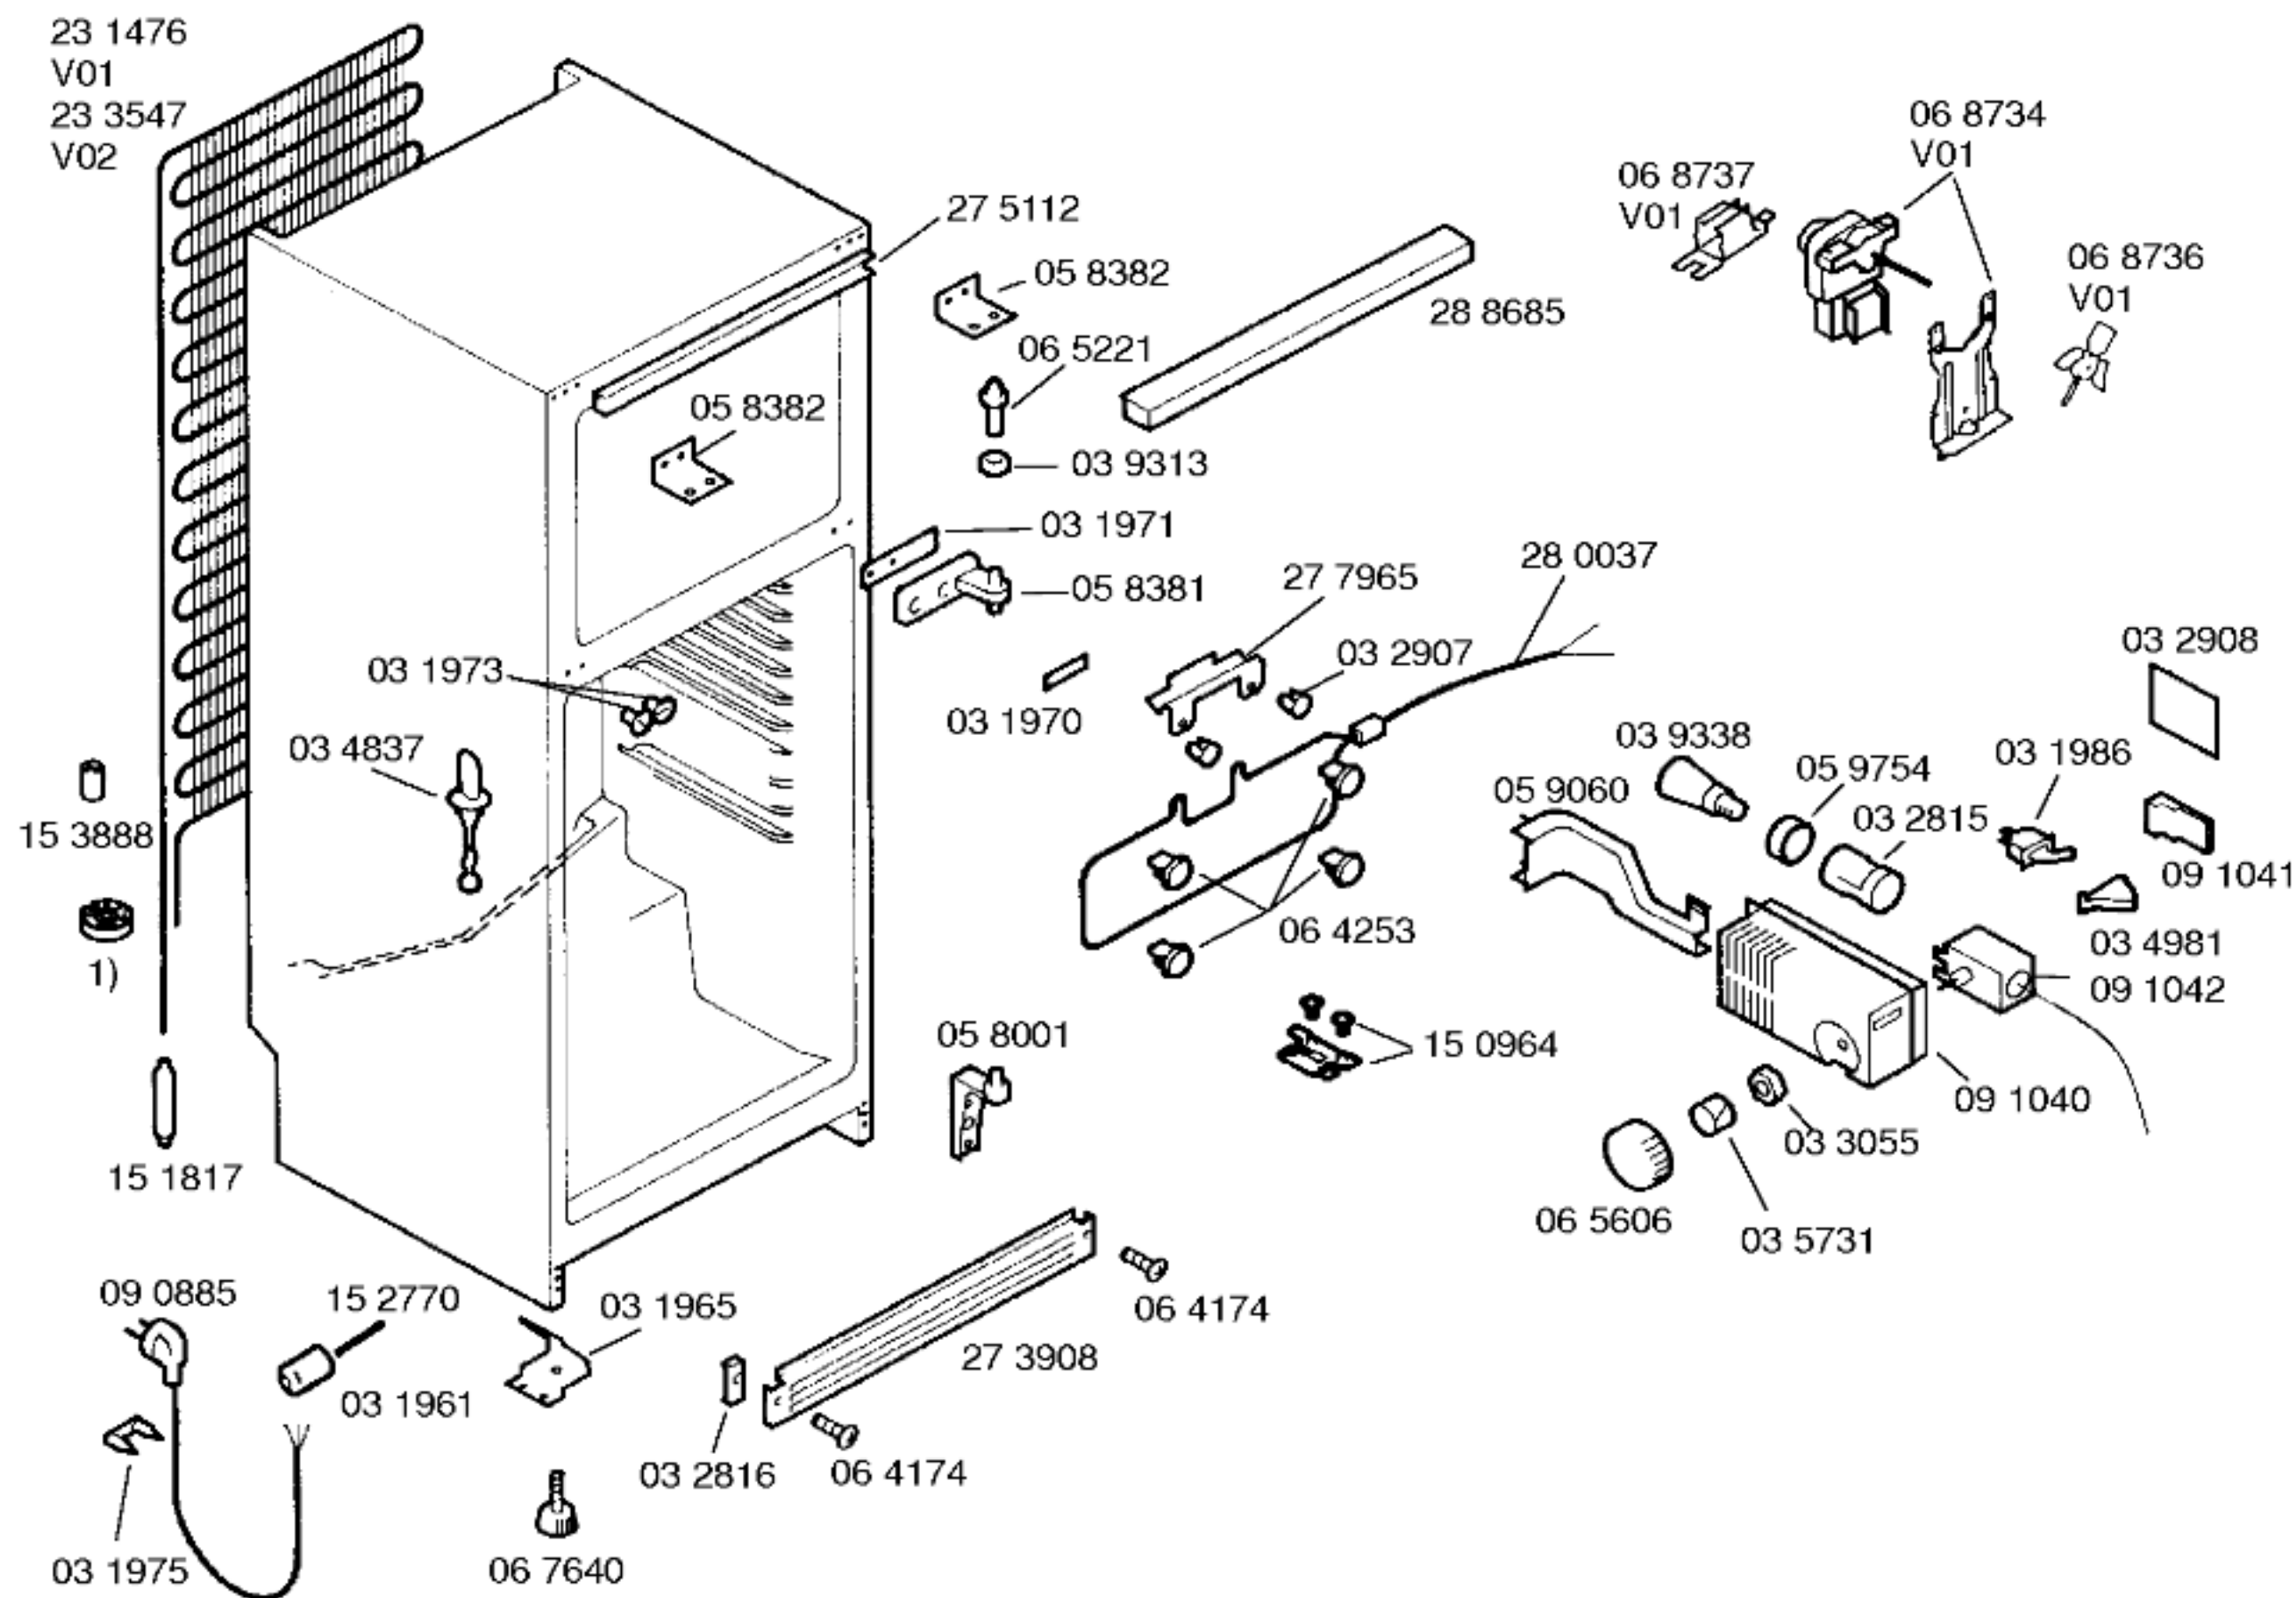

Libro de instrucciones  
51 5200  
(E, GB, F, P, D)

1) 15 2763  
V01  
15 2771  
V02

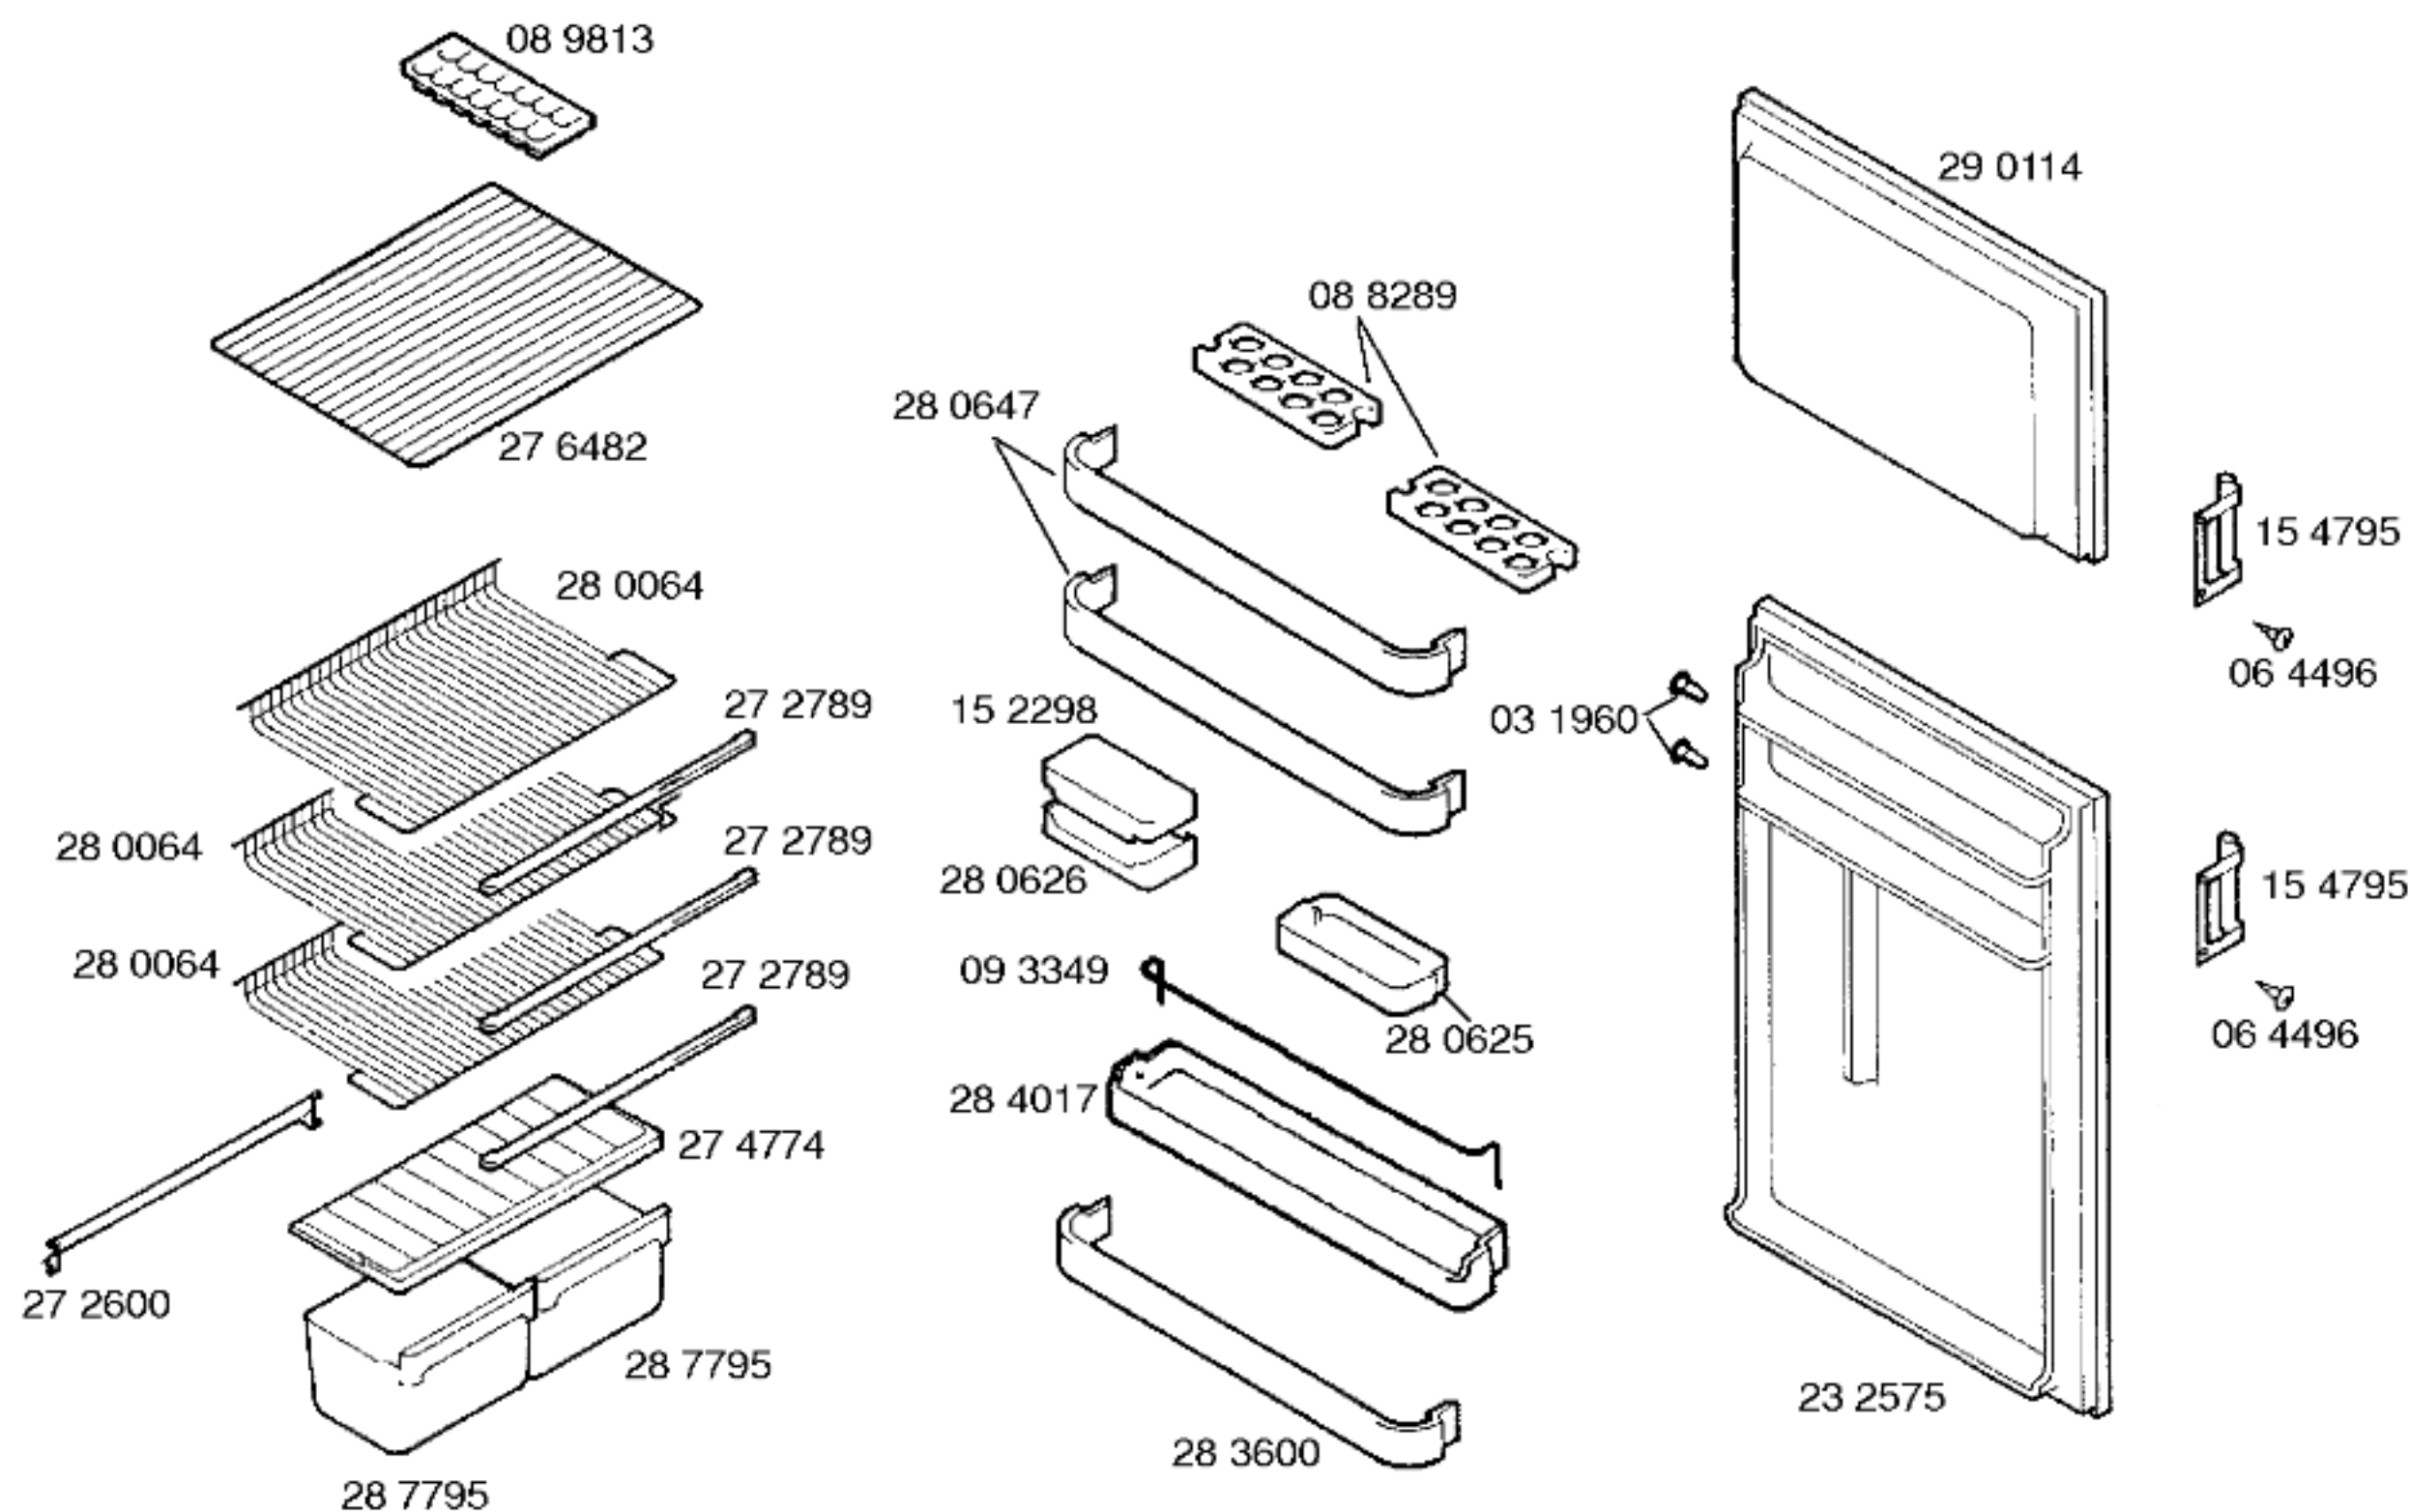

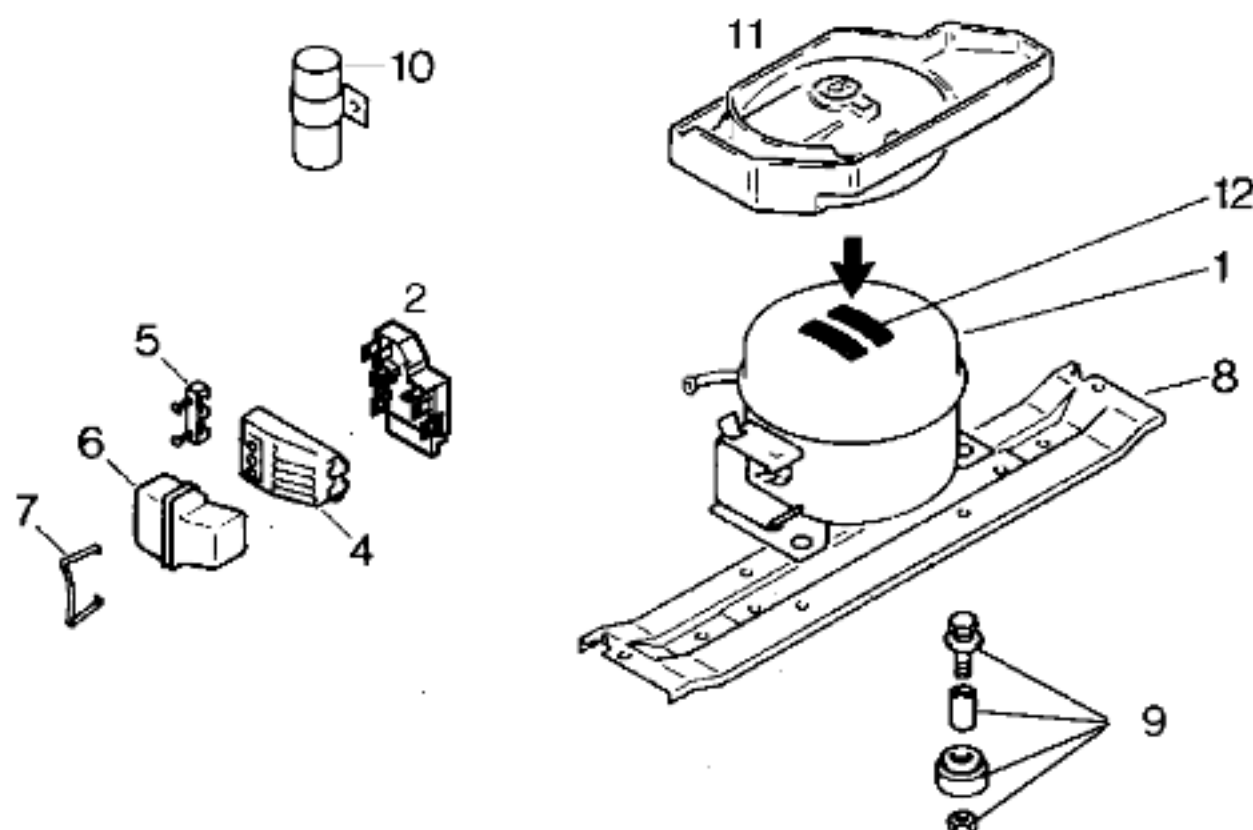

| Pos. | KÜHLGERÄTE | KHÜLGERÄTE |
|------|------------|------------|
|      | ZEM        | U. HERMÉT. |
|      | GL90AA     | GL90AA     |
| 1    | 14 1383    | 14 1360    |
| 2    | 15 5308    | 15 4851    |
| 3    |            |            |
| 4    |            |            |
| 5    |            |            |
| 6    |            |            |
| 7    |            |            |
| 8    | 28 9409    | 28 9409    |
| 9    | 05 0166    | 05 0166    |
| 10   |            |            |
| 11   | 09 6332    | 09 6332    |
| 12   |            |            |
| 13   |            |            |

## TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS

|                                                                            |                |                      |
|----------------------------------------------------------------------------|----------------|----------------------|
| Verdichter/Compressor/Compresseur/Compresor<br>Typ/Type/Tipo               | ZEM<br>GL90AA  | U. Hermét.<br>GL90AA |
| Förderleistung/Delivery/Debit/Aspiración l/h                               |                |                      |
| Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A                 | 12,8           | 12,8                 |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm                       | 9,2            | 9,0                  |
| Hi/aux.                                                                    | 22,8           | 22,4                 |
| Temp.Reyler/Thermostat/Termostato<br>Typ/Type/Tipo                         |                | RANCO<br>K52-L1561   |
| Reglerstellung/Position/Conexión                                           |                | MÁX.-MÍN.            |
| Schaltwerte/Switching values/                                              | ..ein/conex.°C | +5°                  |
| Valeurs de commutation/Desconex.                                           | ..aus"/descon. | -15° -30°            |
| (..abtaven' od)                                                            | ..alarm'       |                      |
| Füllmenge/Fill. quantity/Charge/Carga                                      | 134a g         | 230                  |
|                                                                            |                | 230                  |
| Anschlußwert/Comm. load/puiss. Connect./Potenc.                            | W              | 184                  |
|                                                                            |                | 184                  |
| Heizung/Heater/Chauflage/Resistenc.descong.                                |                |                      |
| Widerstand/Resistance/Resistencia                                          | Ohm            |                      |
| Leistung/Power/Puissance/Potencia                                          | W              |                      |
| Ventilador/Blower/Ventilateur/Ventilador                                   |                |                      |
| Widerstand/Resistance/Resistencia                                          | Ohm            |                      |
| Magnetventil/Magnetic valve/Electrovanne/Electrovalvula                    |                |                      |
| Widerstand/Resistance/Resistencia                                          | Ohm            |                      |
| Spannung/Volare/Tension/Tensión                                            | V              |                      |
| Temp.Reyler/Thermostat/Termostato ambiente para<br>ventilador refrigerador |                |                      |