




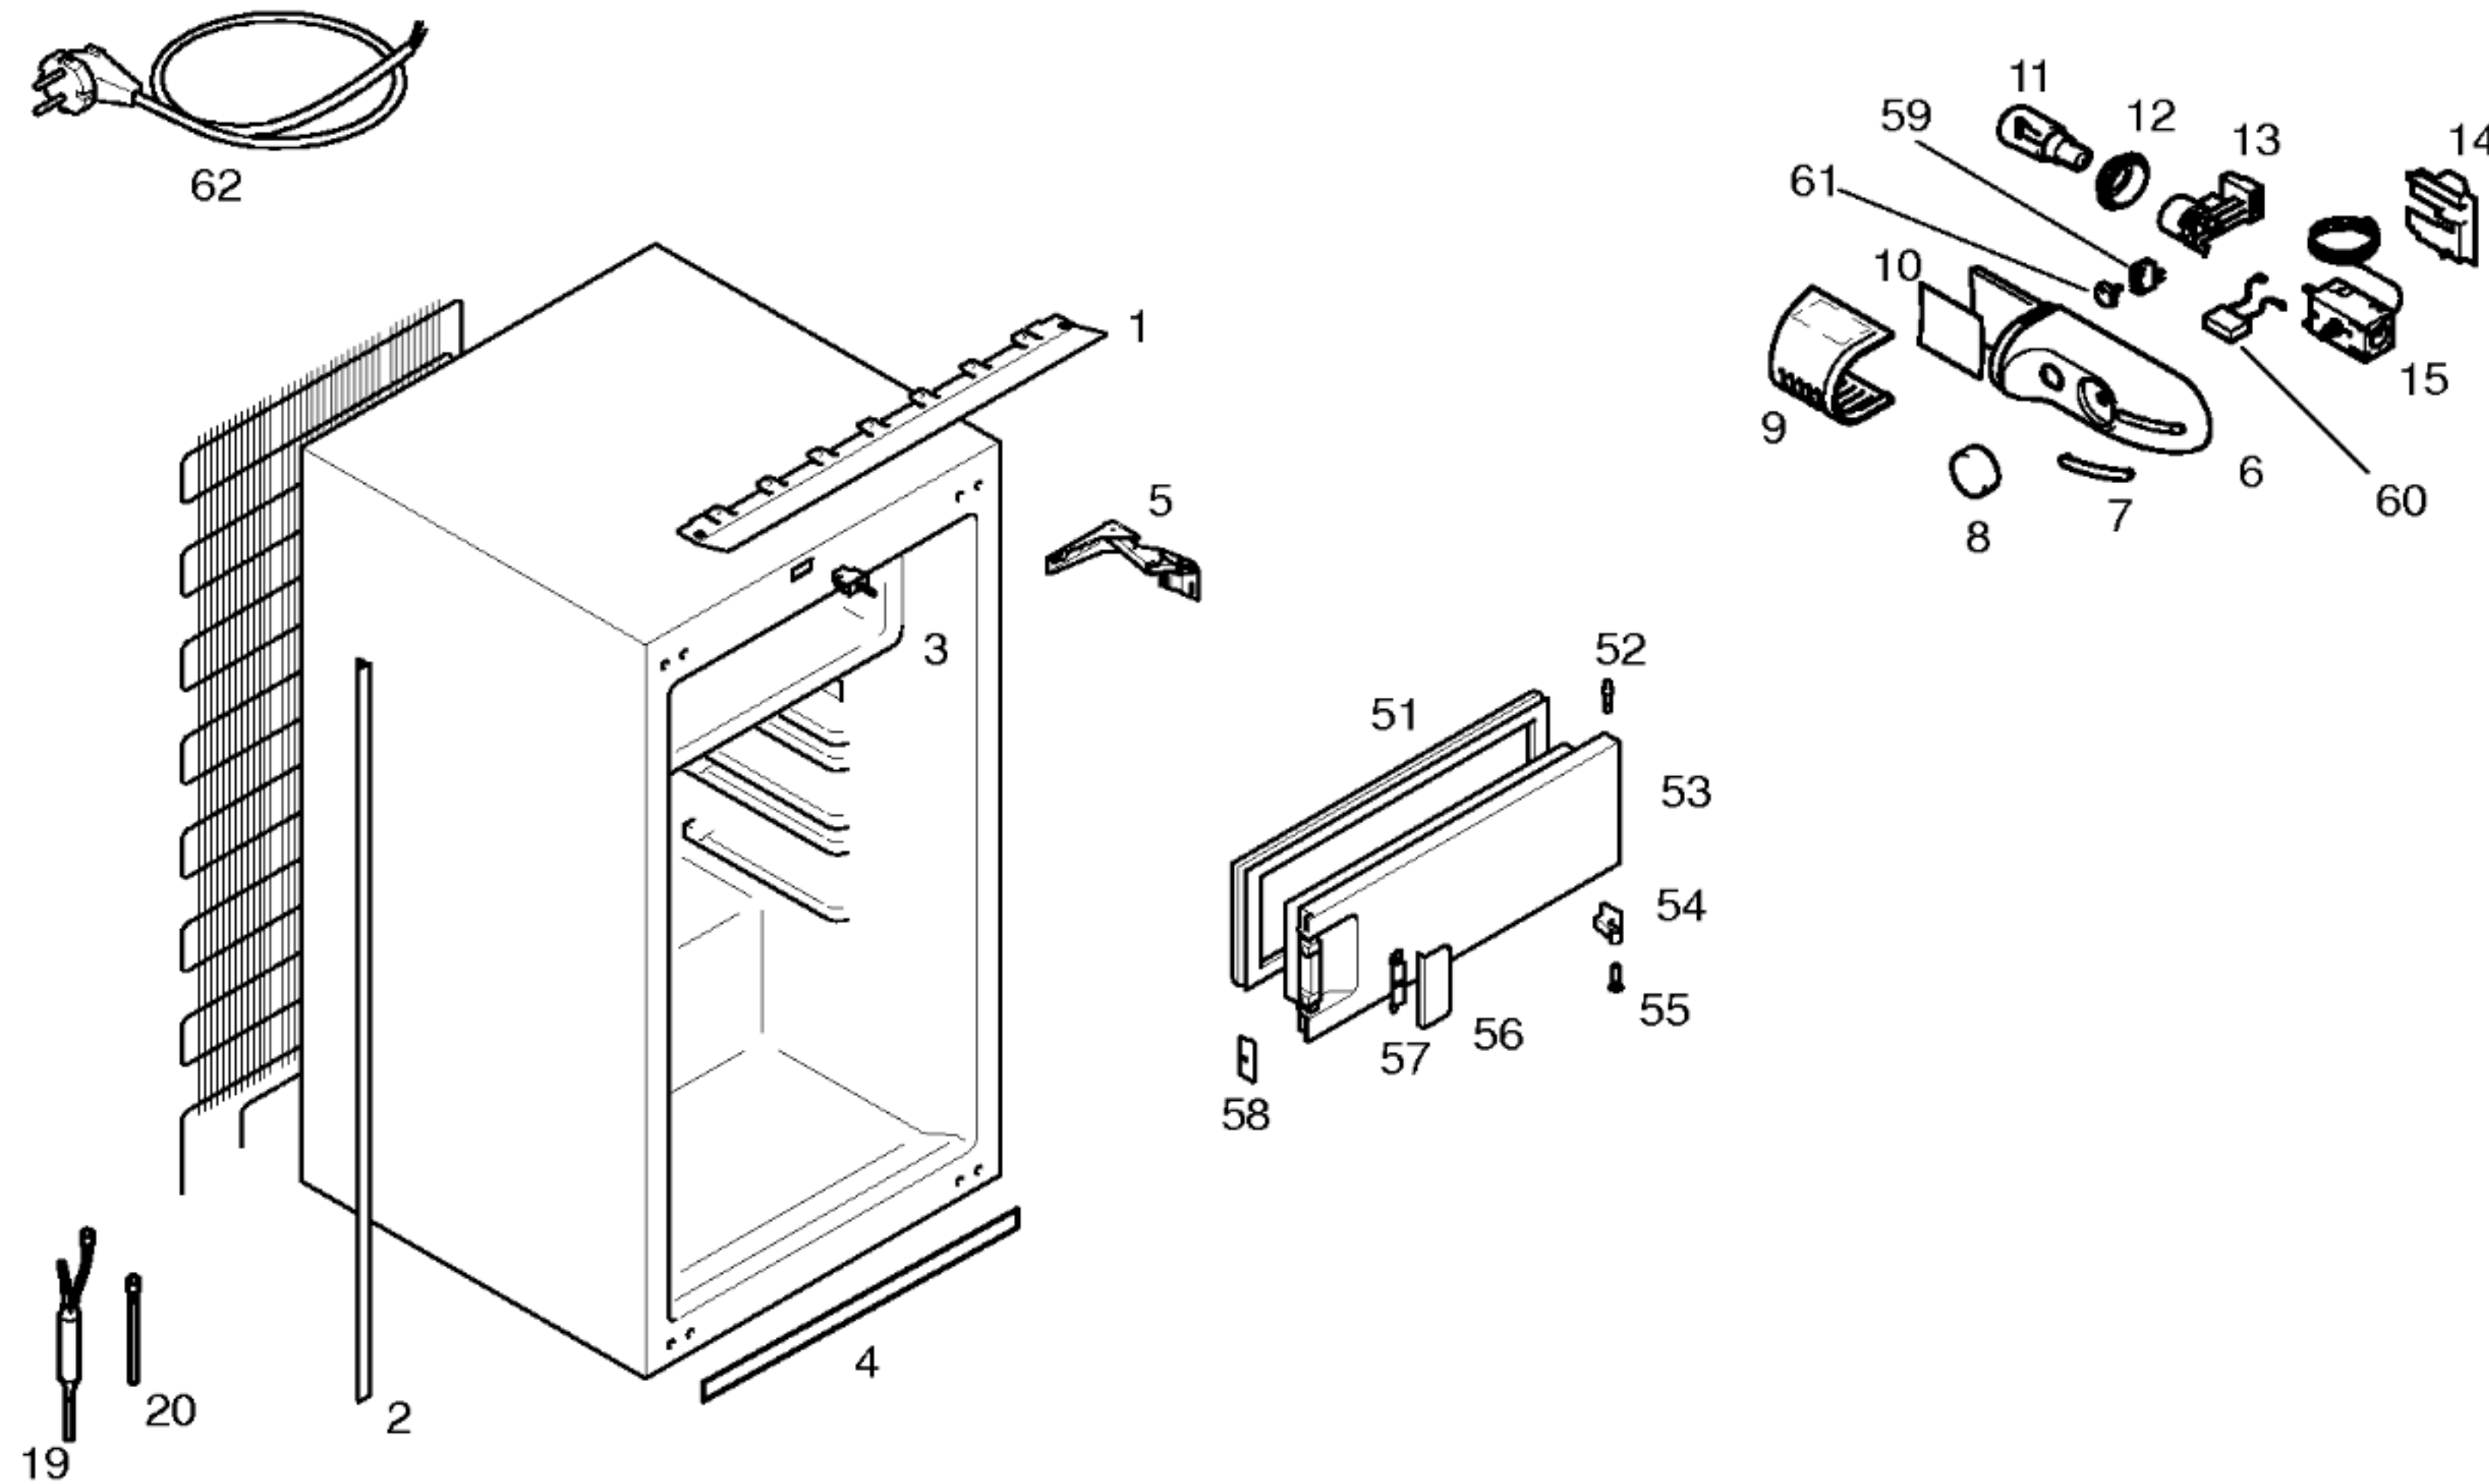

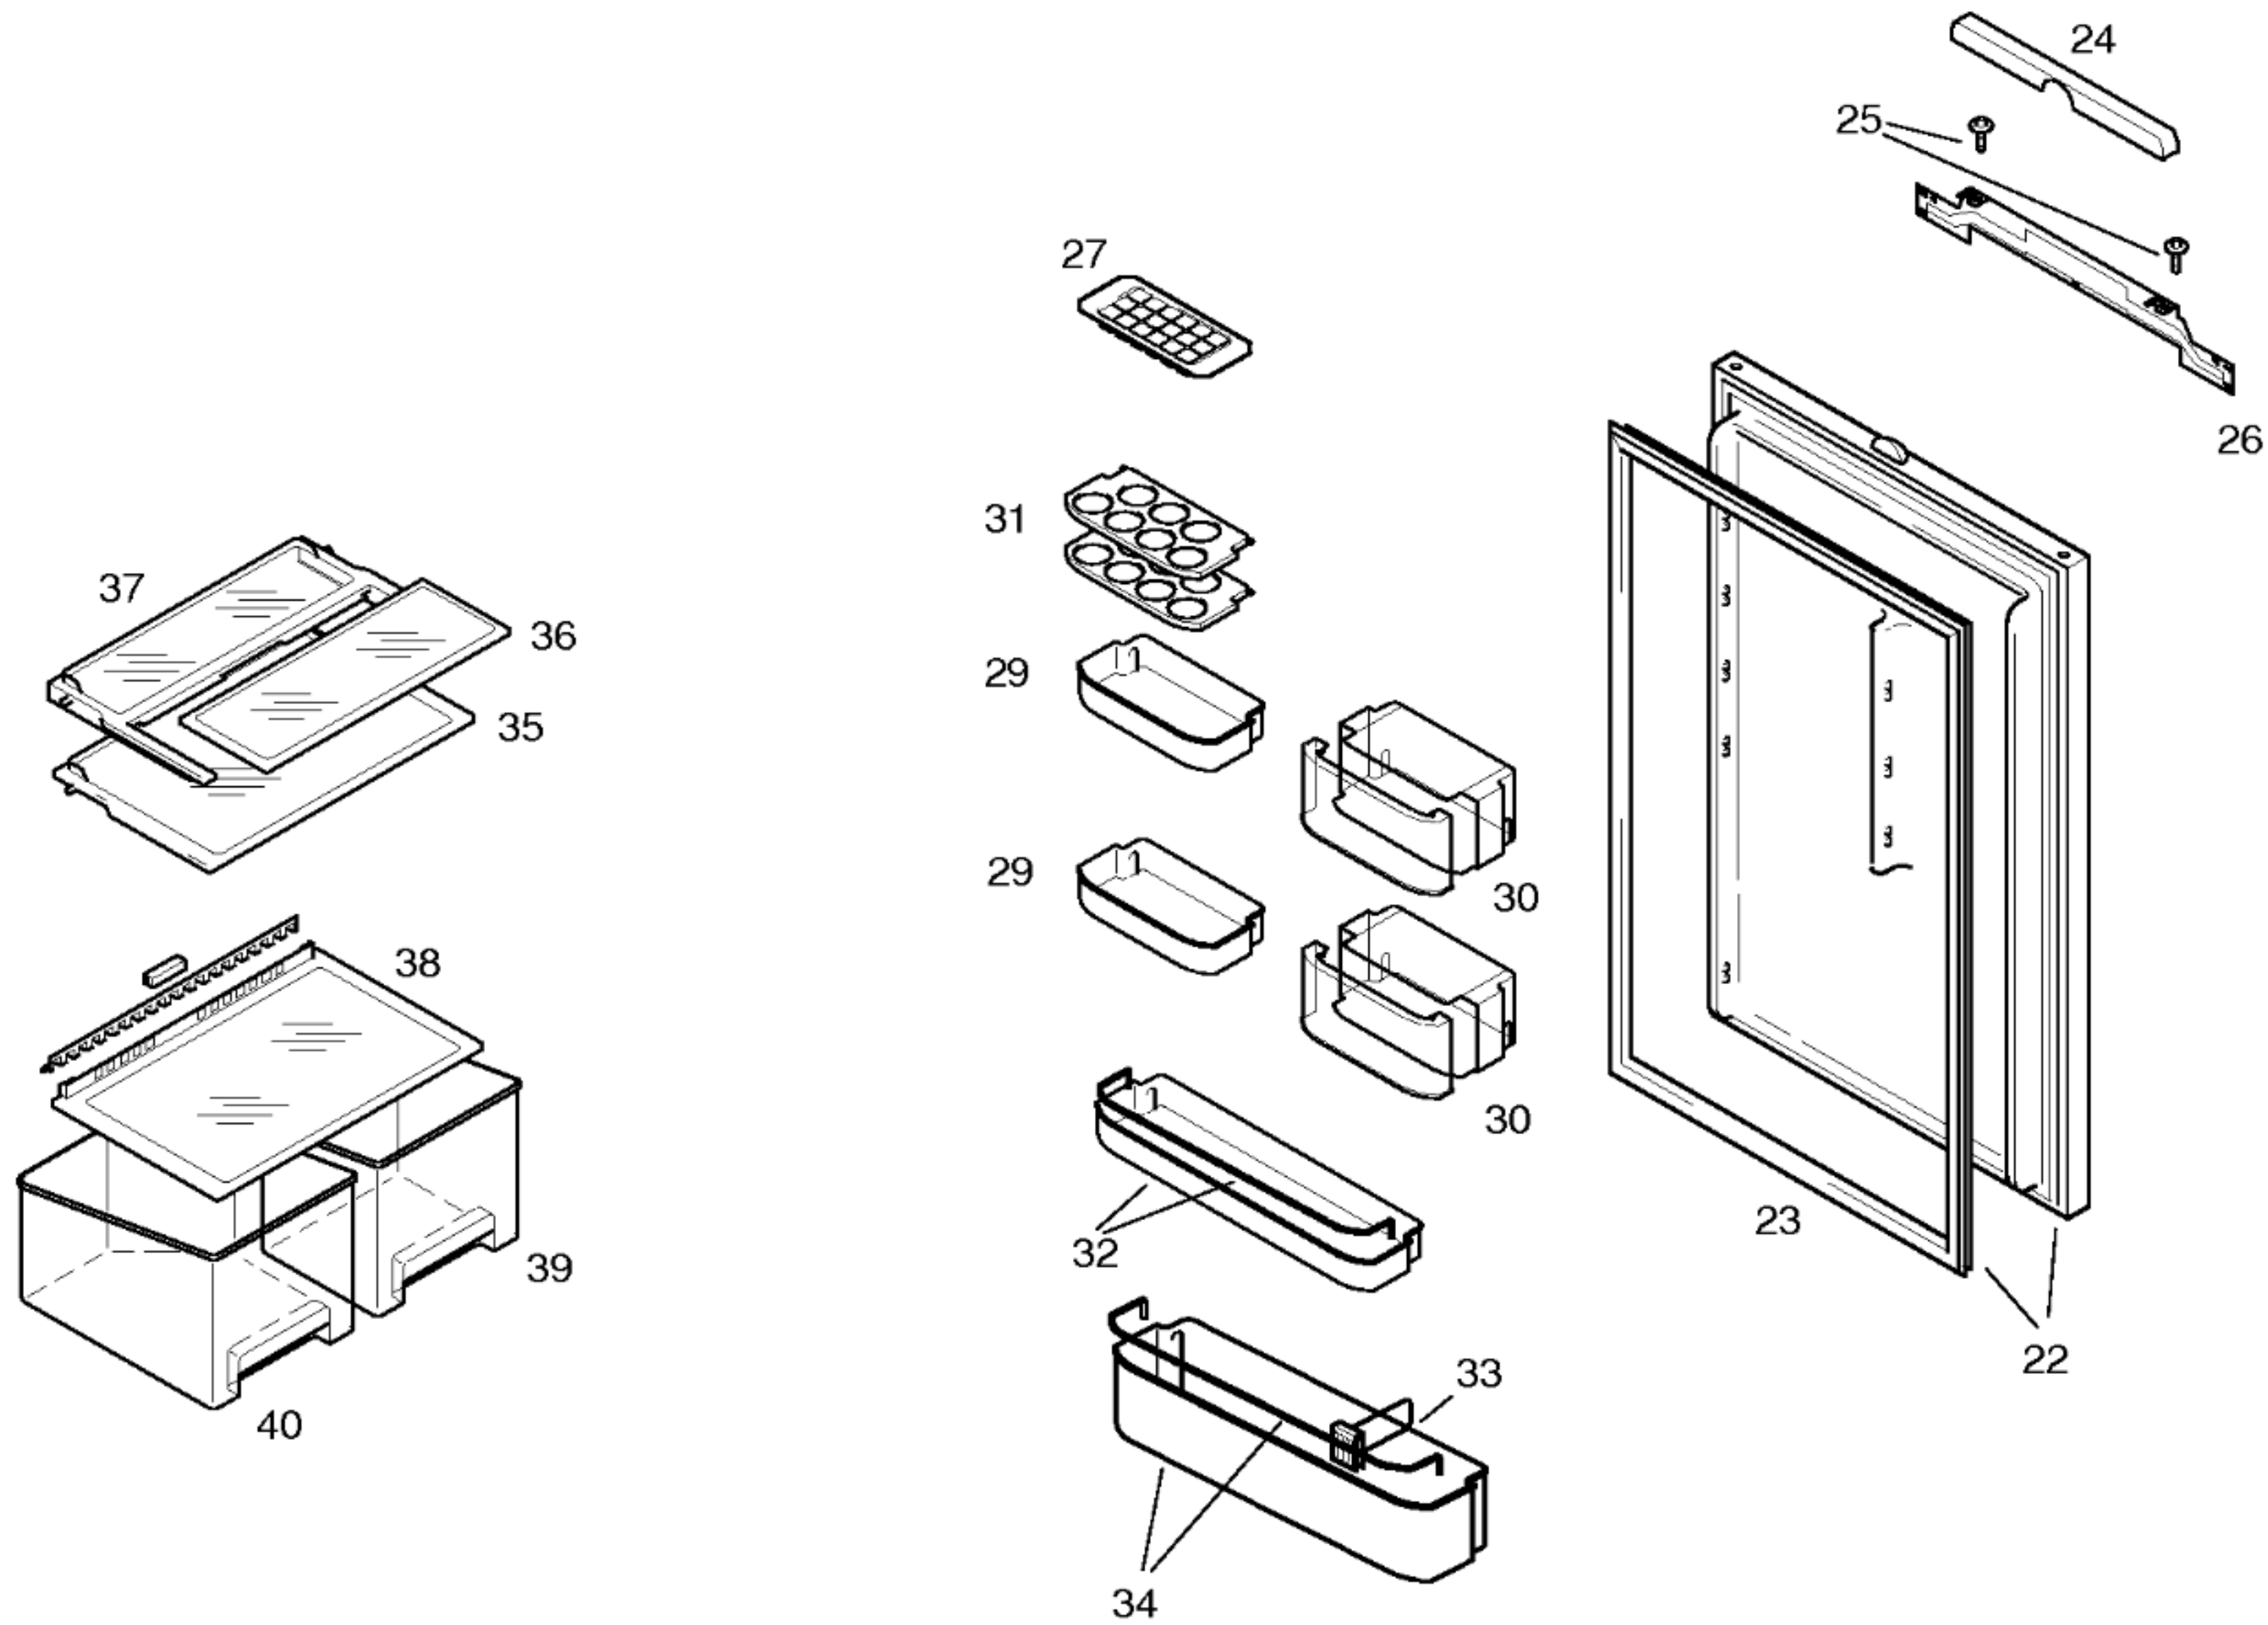

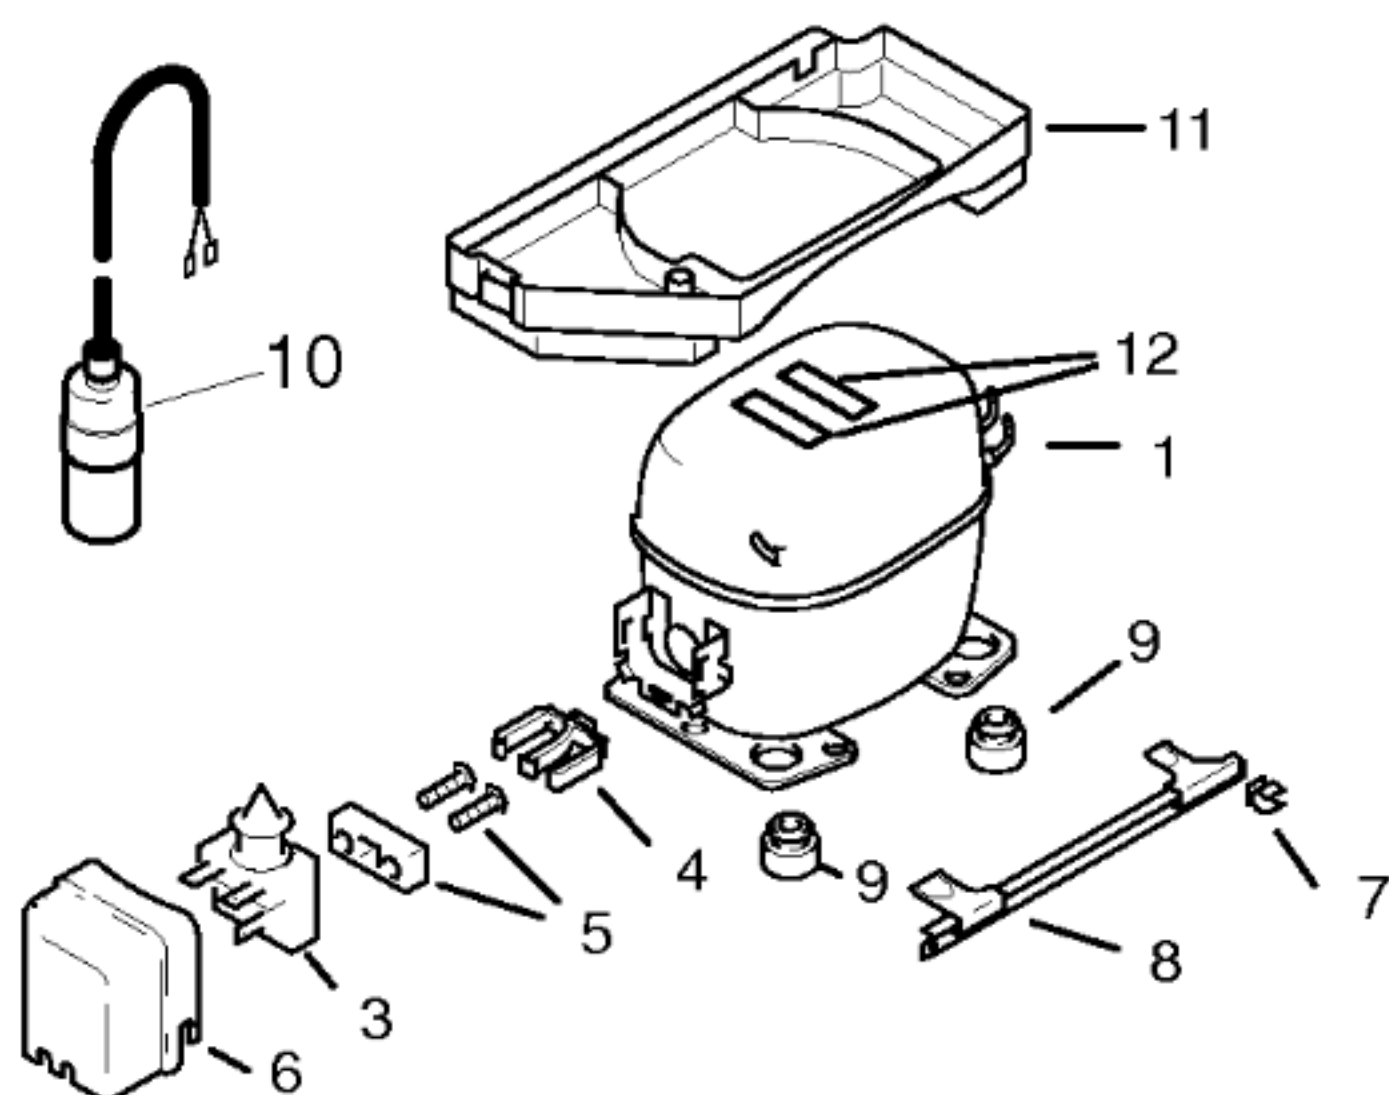

Pos.	V01	V02	
	Matsushita	Danfoss	
	ESS 60E	TLY 6 KK2	
1	41	41	
2			
3	42	42	
4			
5	43	43	
6	44	44	
7	45	45	
8	46	46	
9	47	47	
10	48	48	
11	49	49	
12	50	50	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		ESS 60E	TLY 6 KK2	
Förderleistung/Delivery/Débit		l/h	1076	1026
Anlaufstrom/Starting current/Cour de démarrage		A	5,6	4,4
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	30,6	34,0
		Hi/aux Ω	26,7	31,0
Temp.-Regler/Thermostat		Ranco		
Typ/Type				
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		+4,0	+4,0	
Valeurs de commutation		„ein“	„aus“	
		„abtauen“ od.)	„alarm“	
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée		W	63	68
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild