

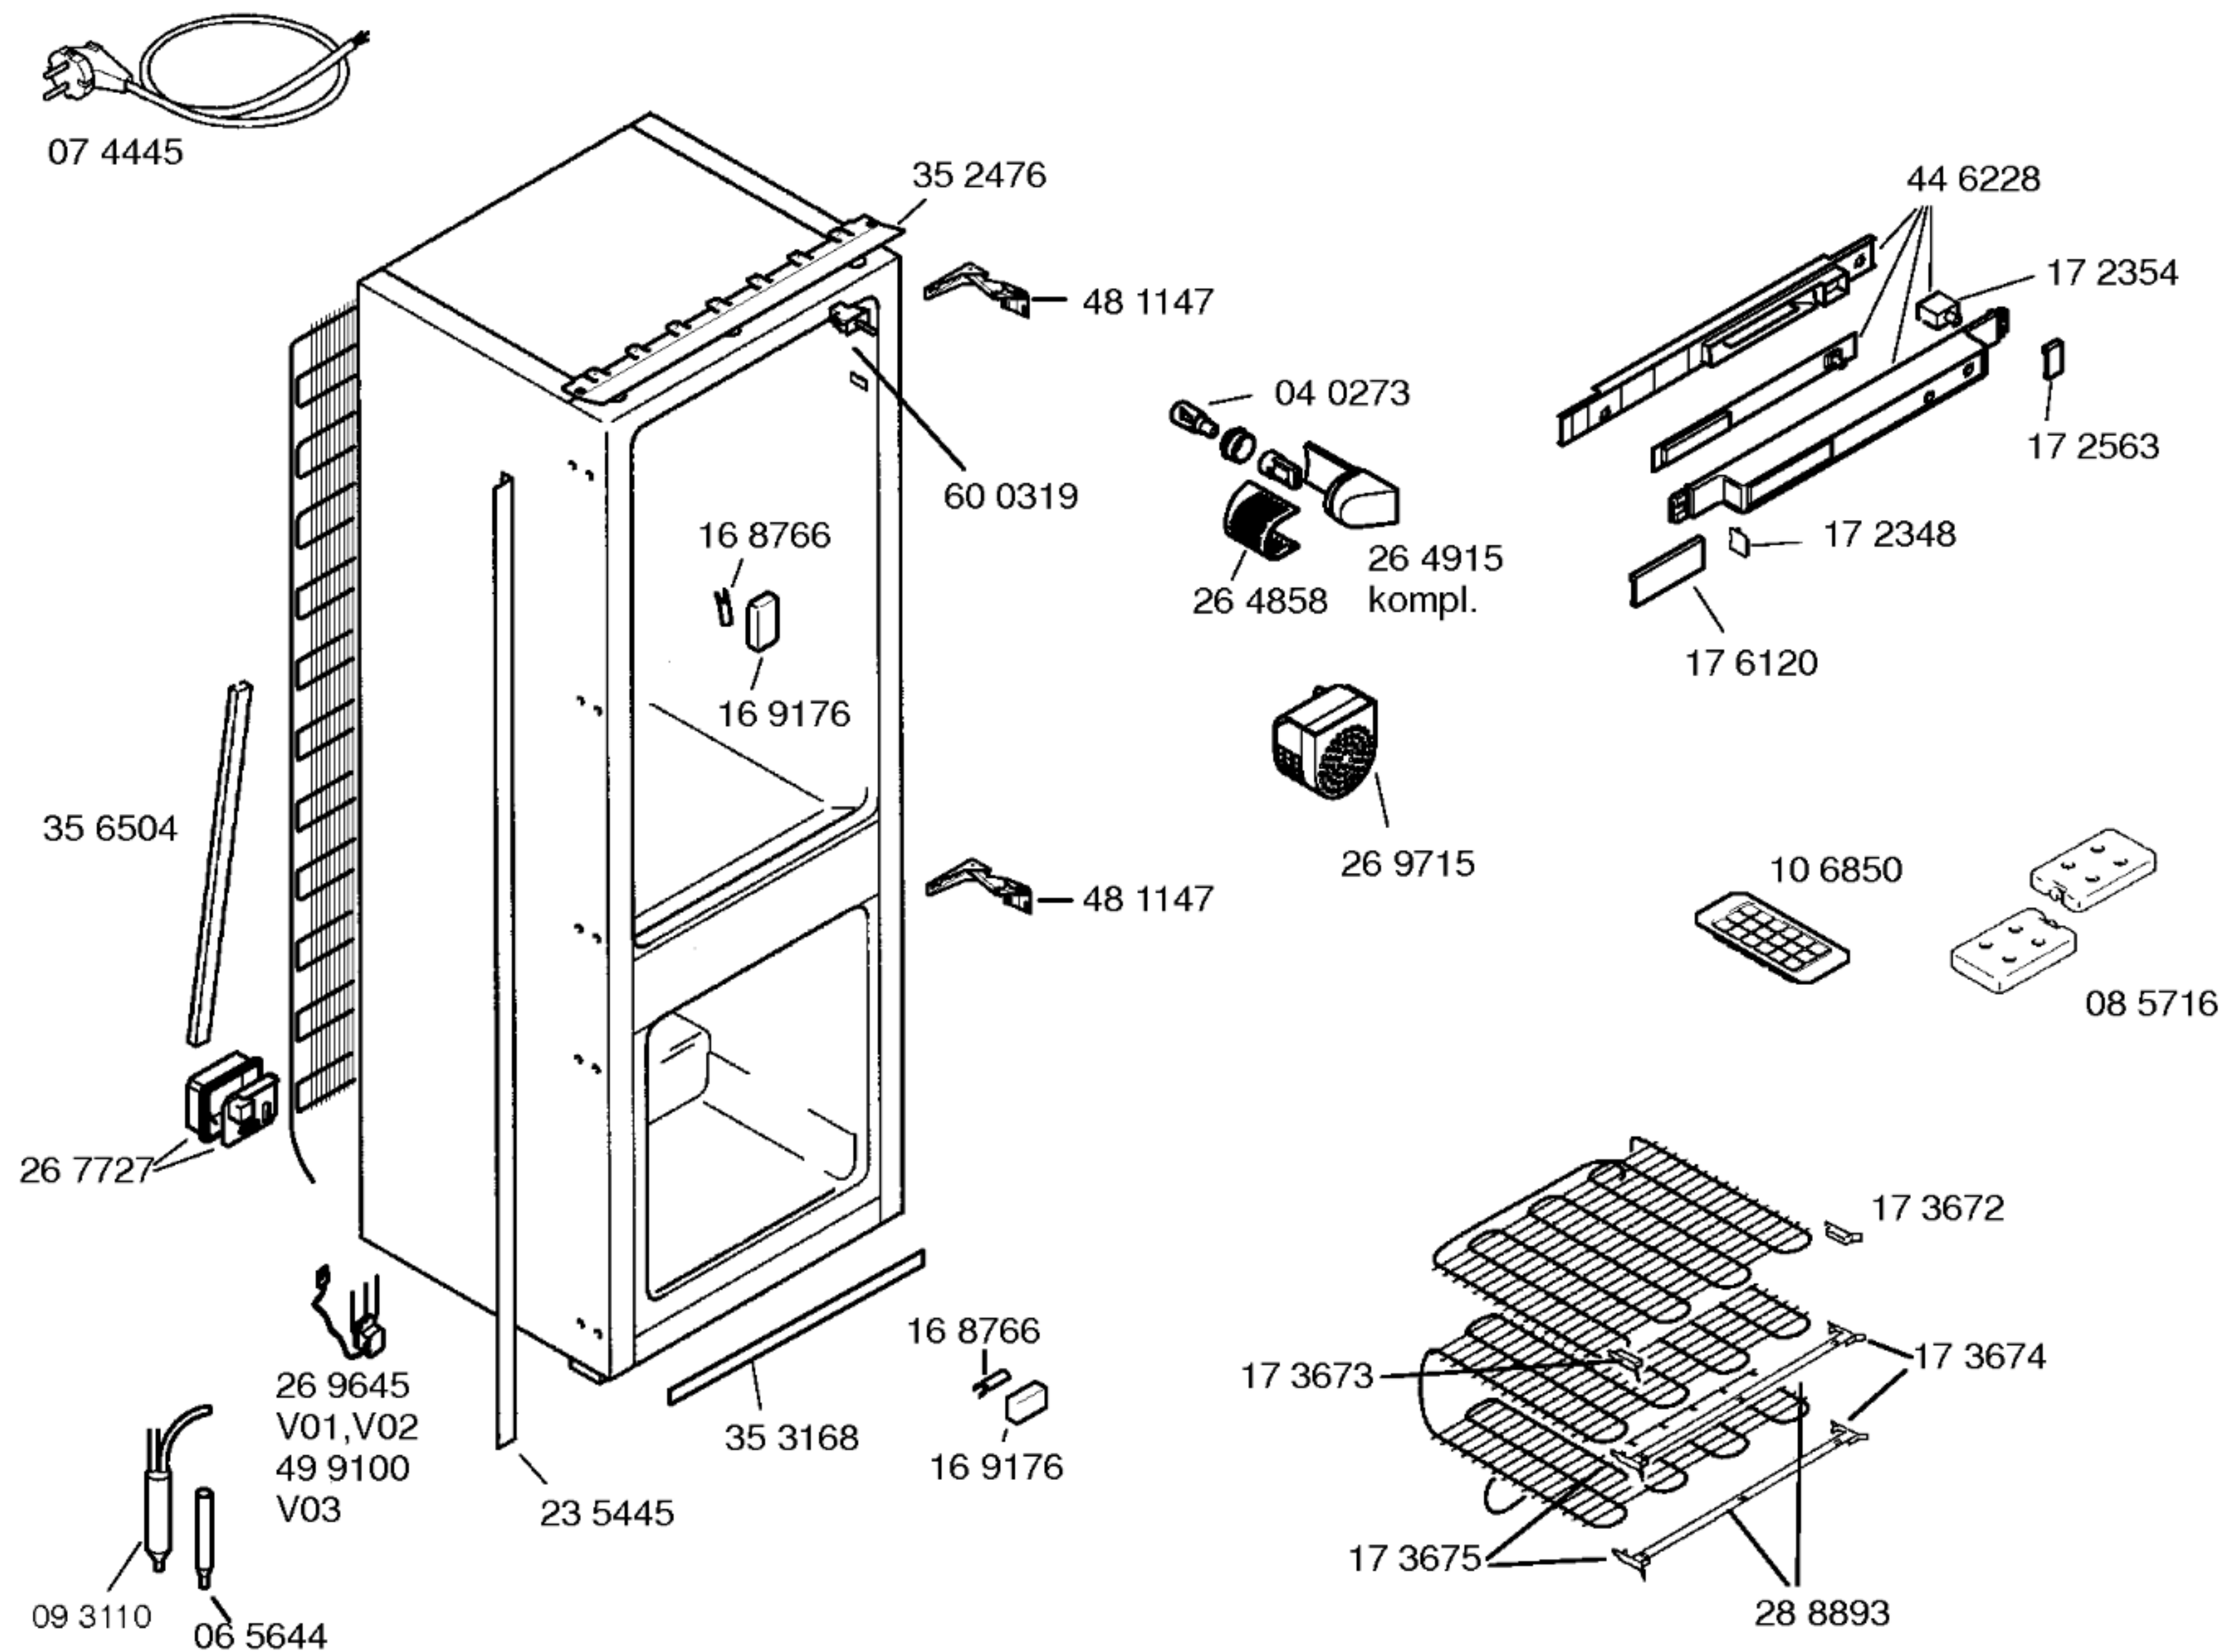
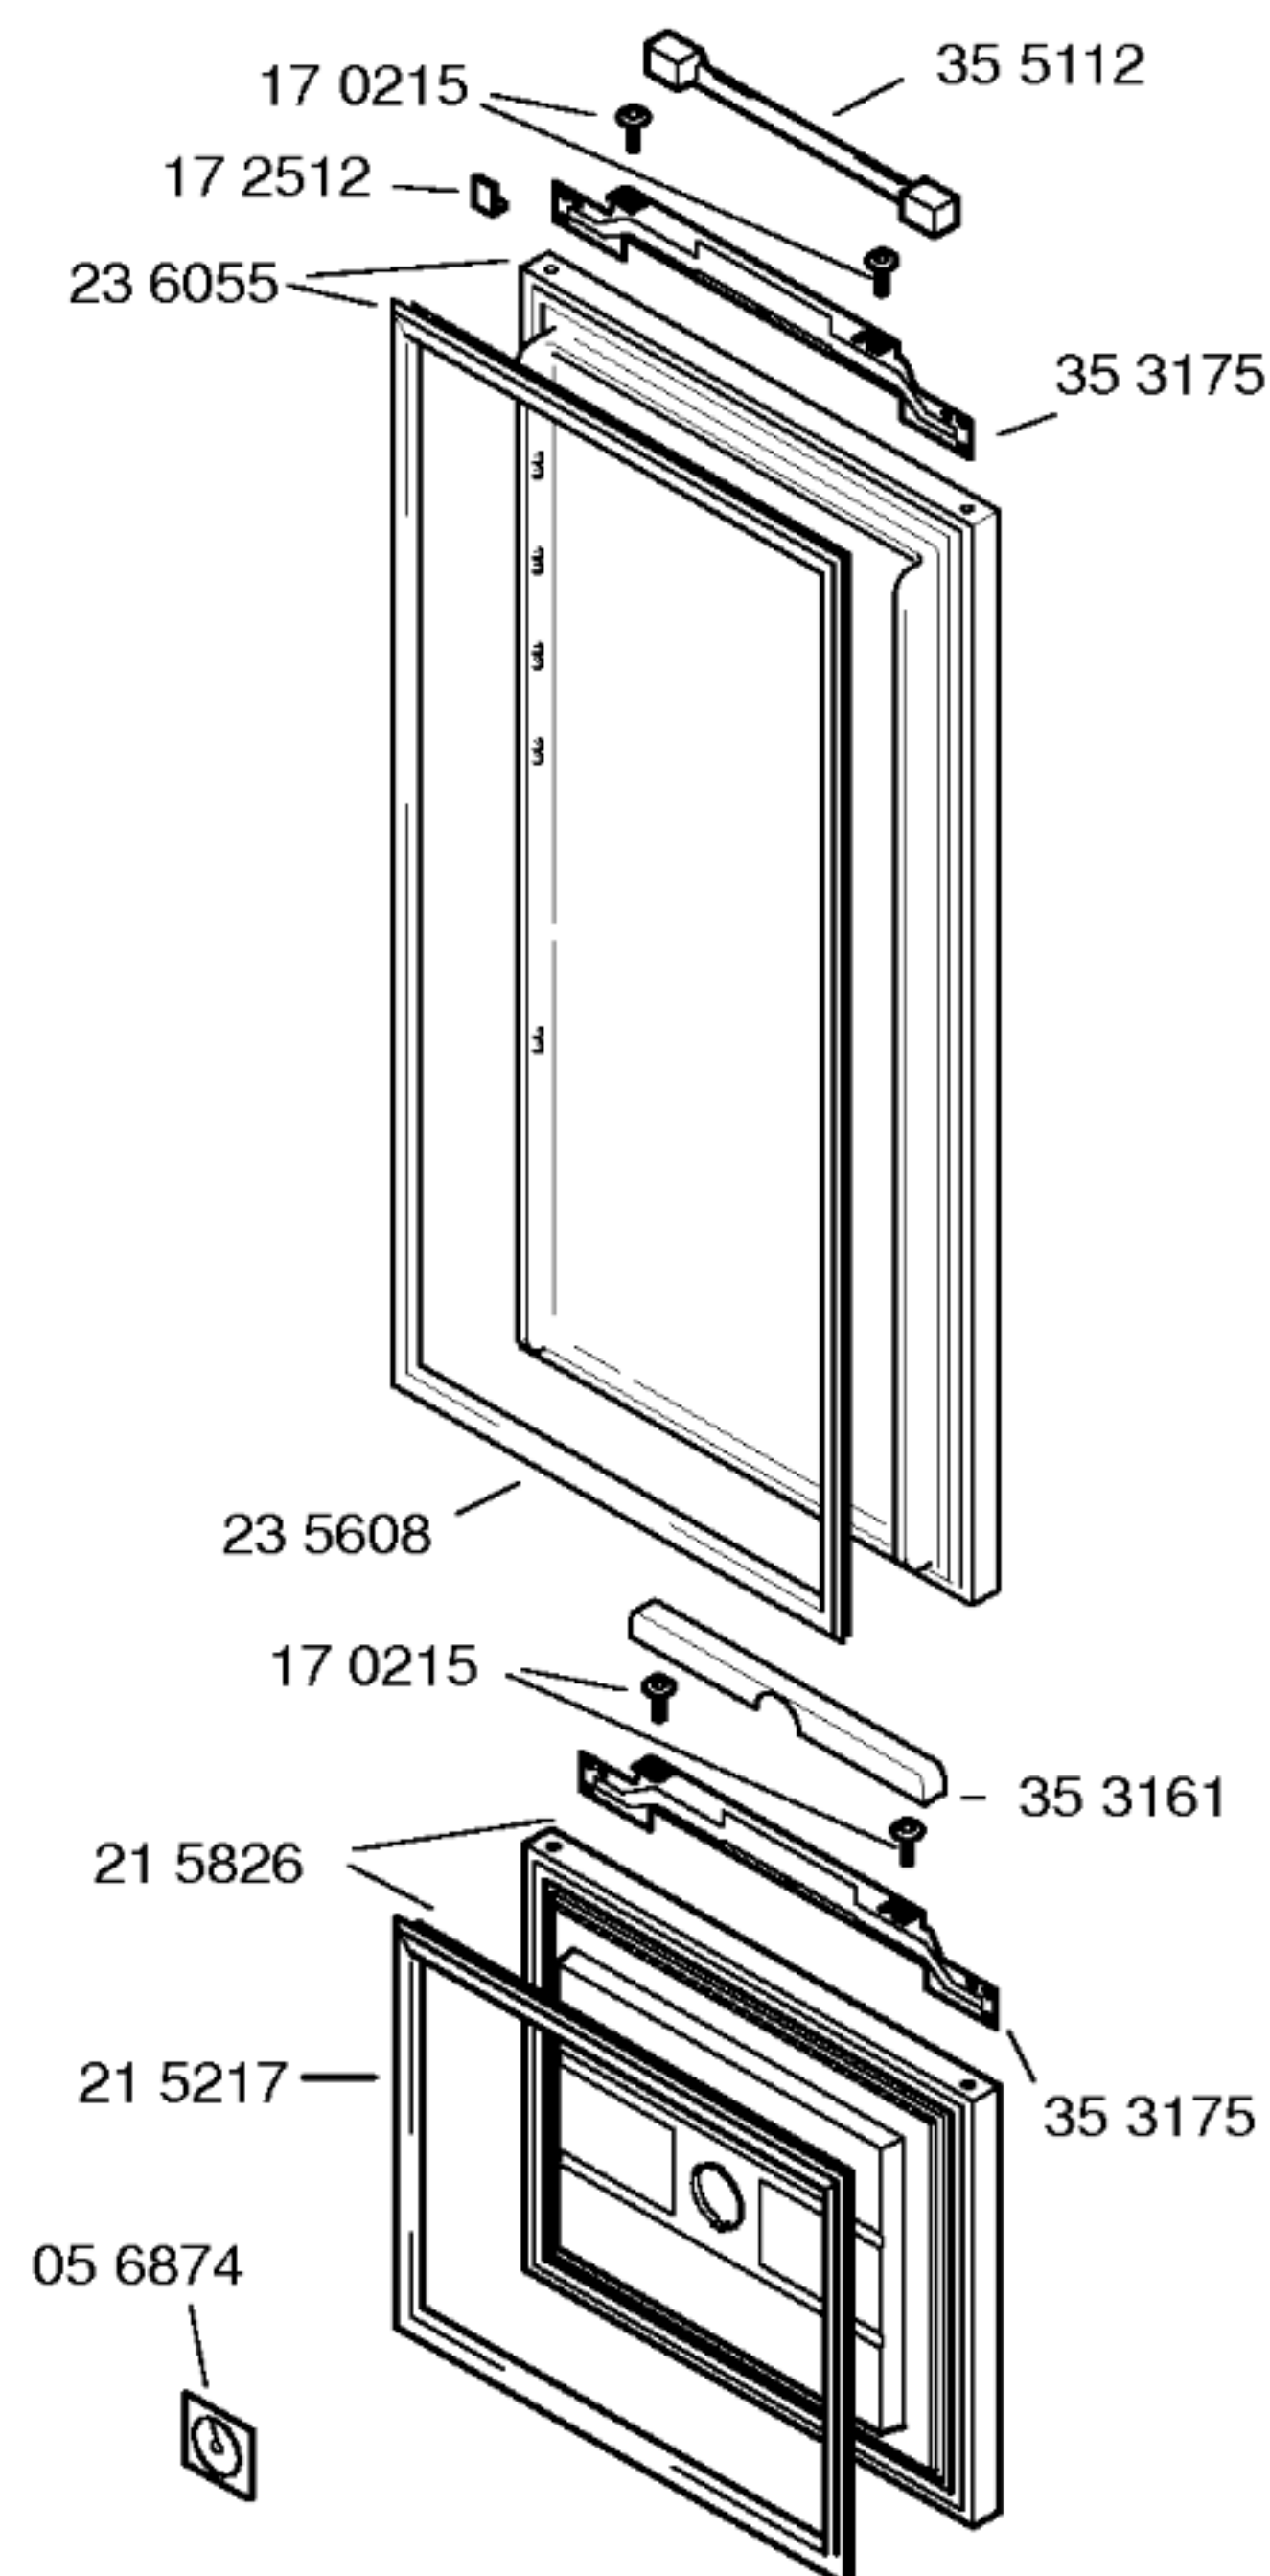
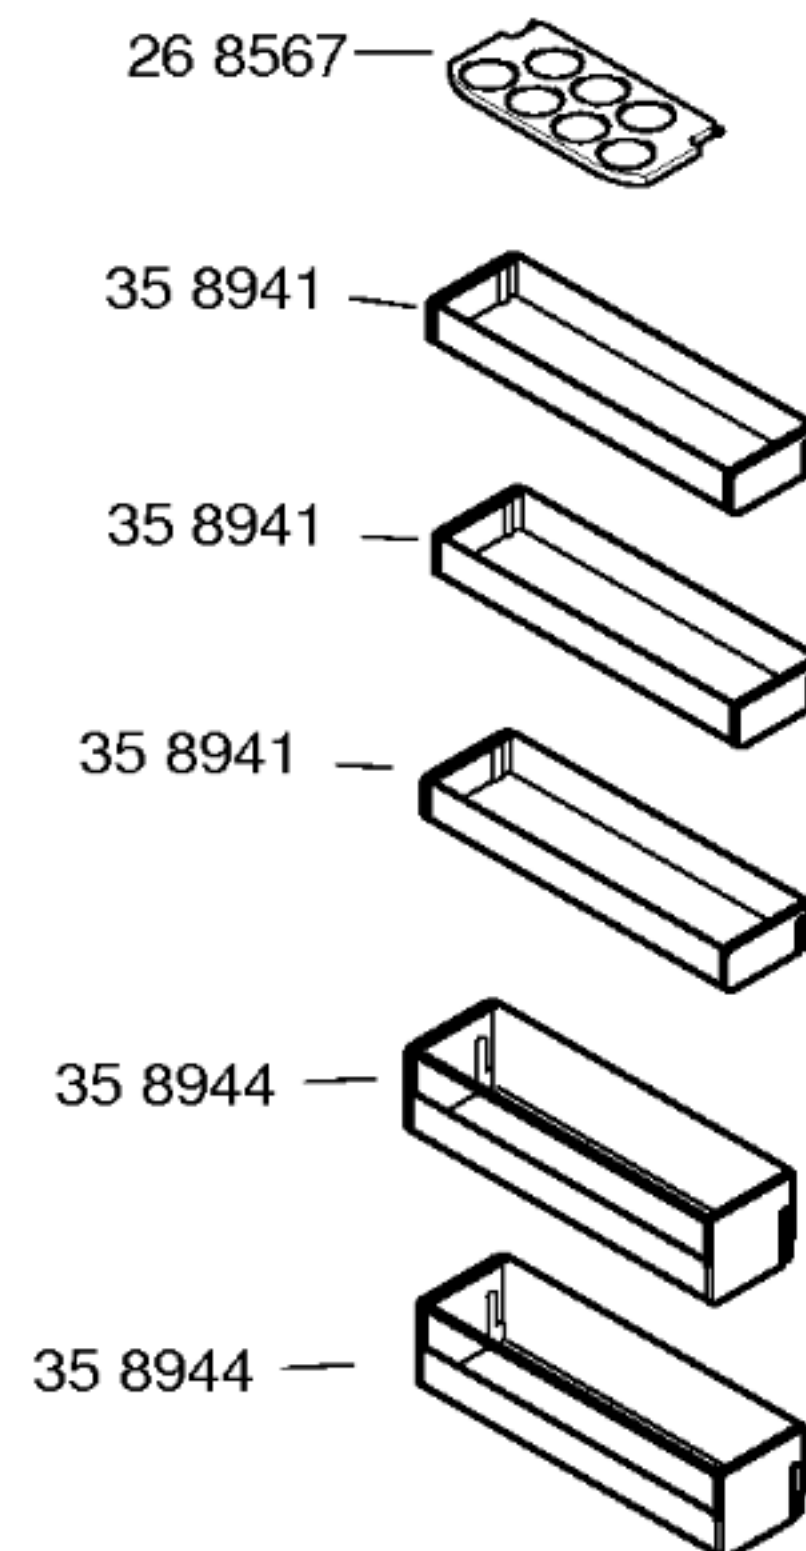
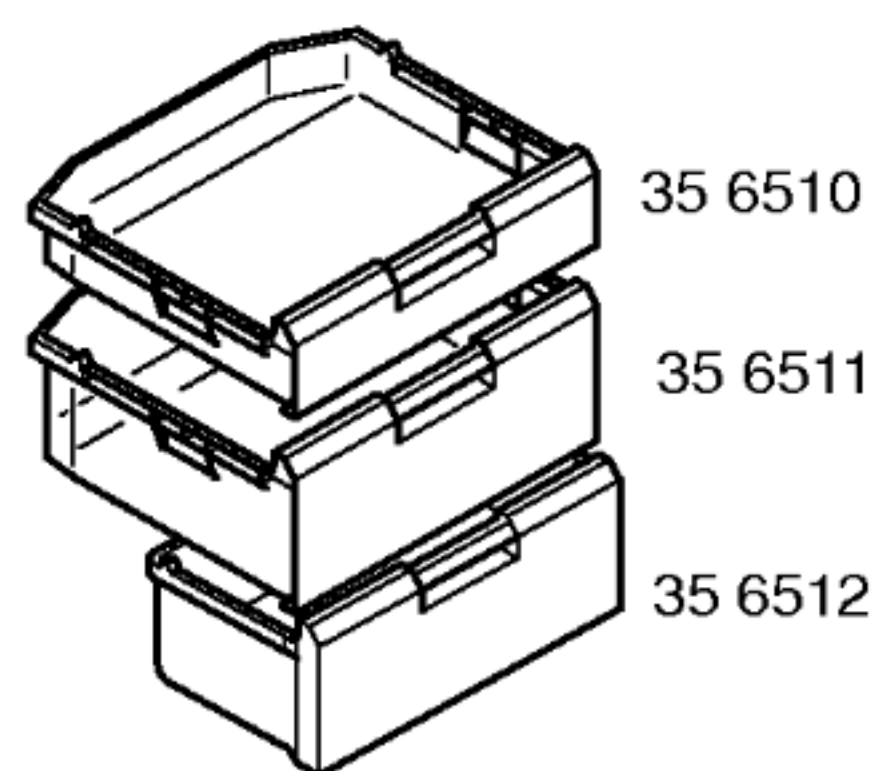


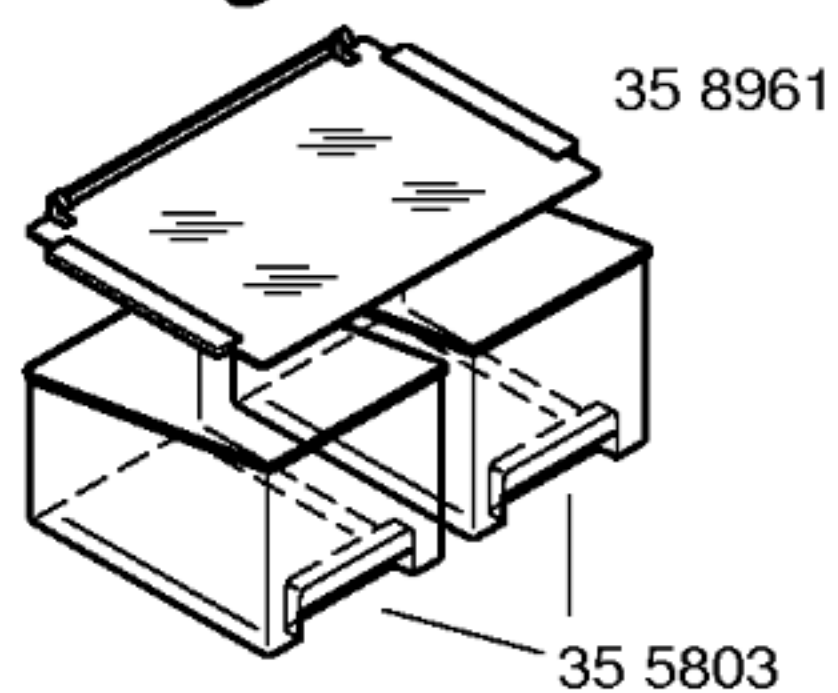


Gebrauchsanweisung
59 5533
(de,en,fr,it,nl,es,pt,el,tr)
69 2131
(da,no,sv,fi)

Montageanleitung
58 8057
(D,GB,F,I,NL,S,E,DK,N,,SF)

Befestigungssatz
49 1365

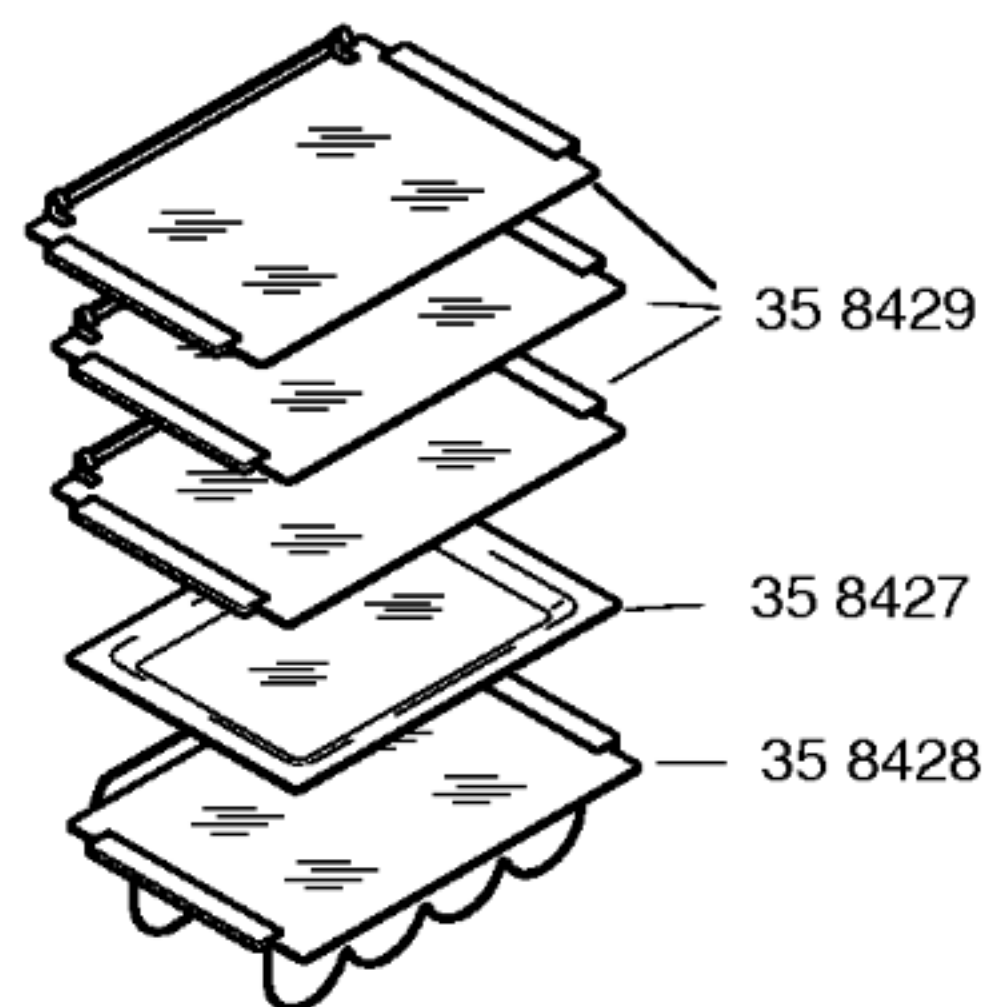

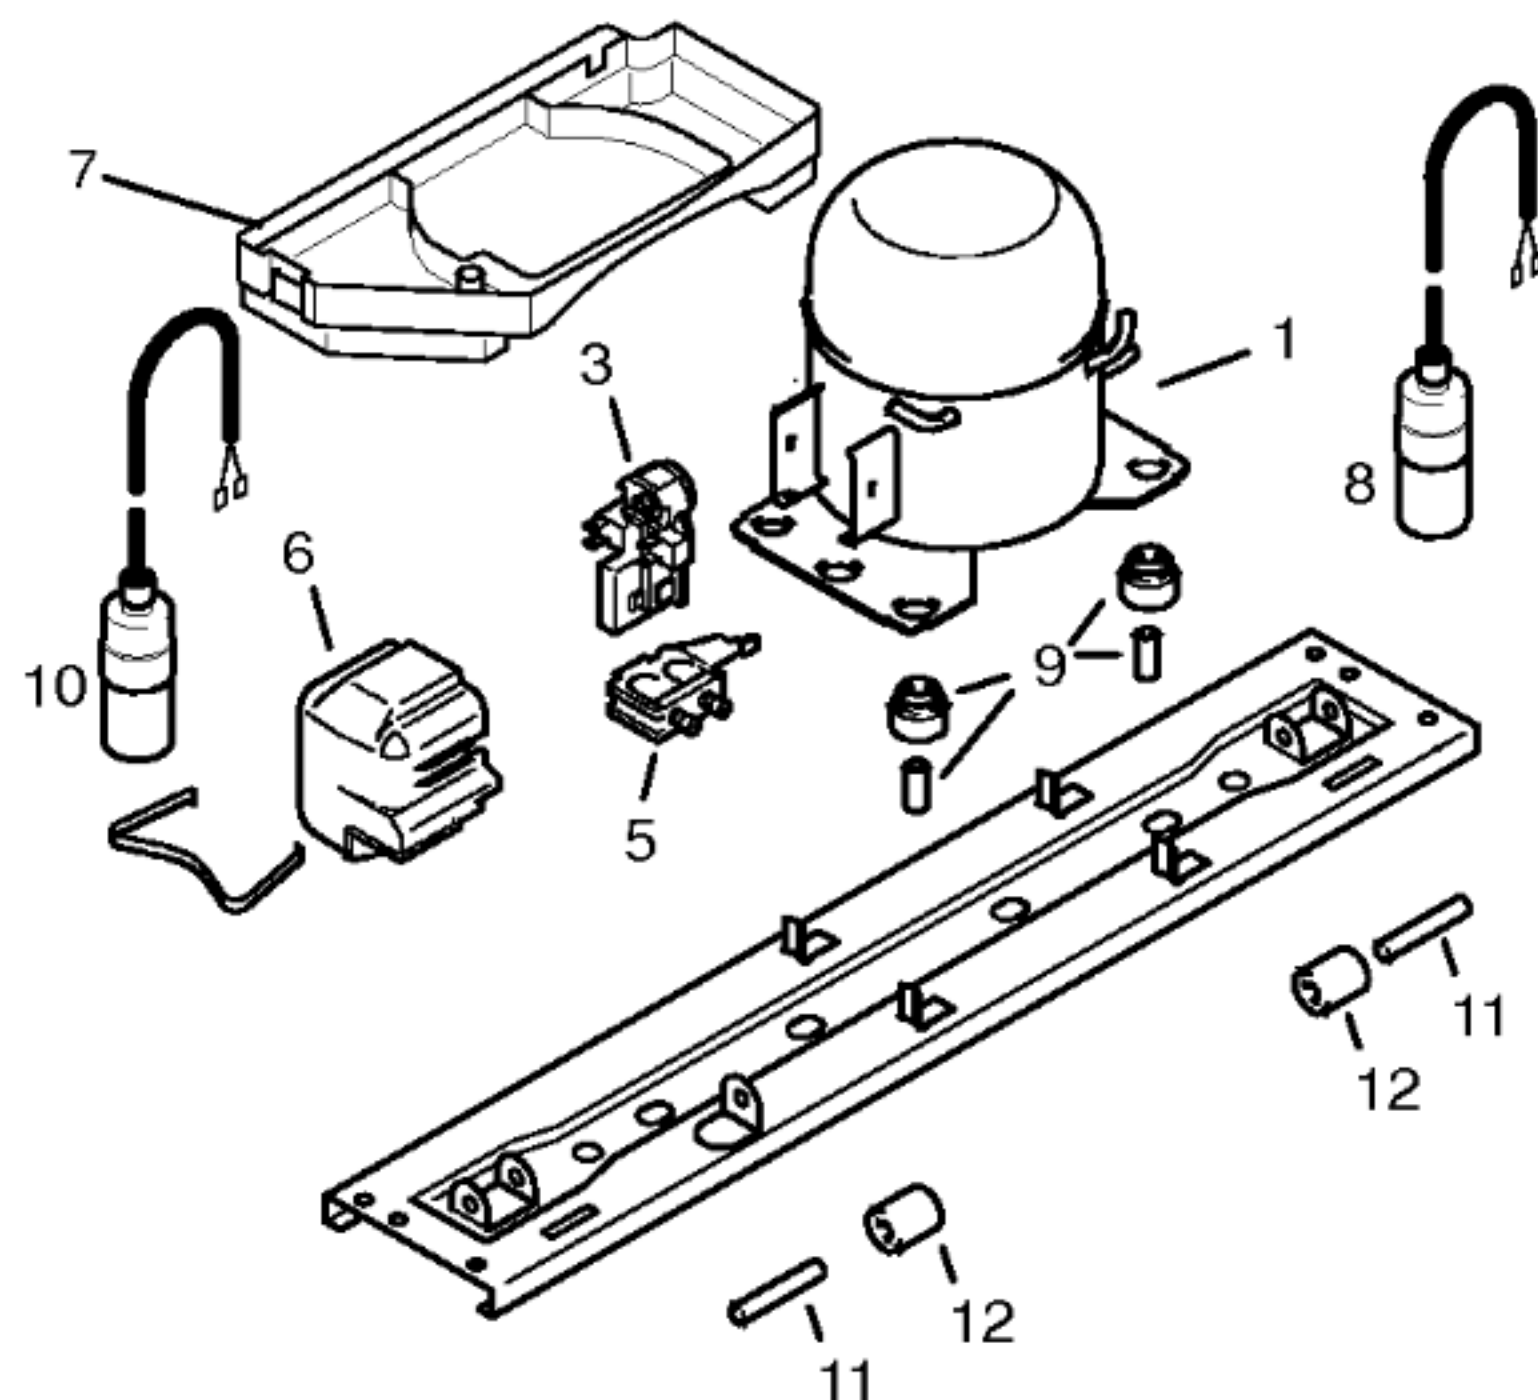

	V01		
	Matsushita		
Pos.	DGX 110 E		
1	14 2360		
2			
3	18 8959		
4			
5	18 3590		
6	41 8045		
7	26 6624		
8	41 9025		
9	05 0166		
10	16 8603		
11	01 9017		
12	01 1916		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Matsushita			
Typ/Type		DGX 110 E			
Förderleistung/Delivery/Débit		l/h	1955		
Anlaufstrom/Starting current/Cour de démarrage		A	0,5		
Widerstand/Resistance/Résistance		Ha/main/prin	W	14,7	
		Hi/aux	W	27,3	
Temp.-Regler/Thermostat		Elektronisch			
Typ/Type		EIN	AUS		
Regelstellung/Position		-15	-16		
Schaltwerte/Switching values		"warm"	-19	-20	
Valeurs de commutation		"kalt"	-23	-24	
		"alarm"	-9	-14	
Füllmenge/Fill.quantity/Charge		R600a	*		
Anschlußwert/Conn.load/Puiss. connectée		W	104		
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance		W	288	240	
Leistung/Power/Puissance		W	200	24	
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		W	560		
Raumtemperaturfühler		C	K	C	k
		+10	9,9	-18	43,3
		+5	12,7	-22	54,6
		+0	16,3	-26	69,4
Widerstand NTC-Fühler		°C	kW	°C	kW
		-1	17,3	-15	36,5
		-9	26,2	-16	38,8
		-14	34,5	-19	45,9
Magnetventil/Magnetic valve/Electrovanne					
		Widerstand/Resistance/Résistance	W		
		Spannung/Voltage/Tension	V		

* siehe Typenschild