


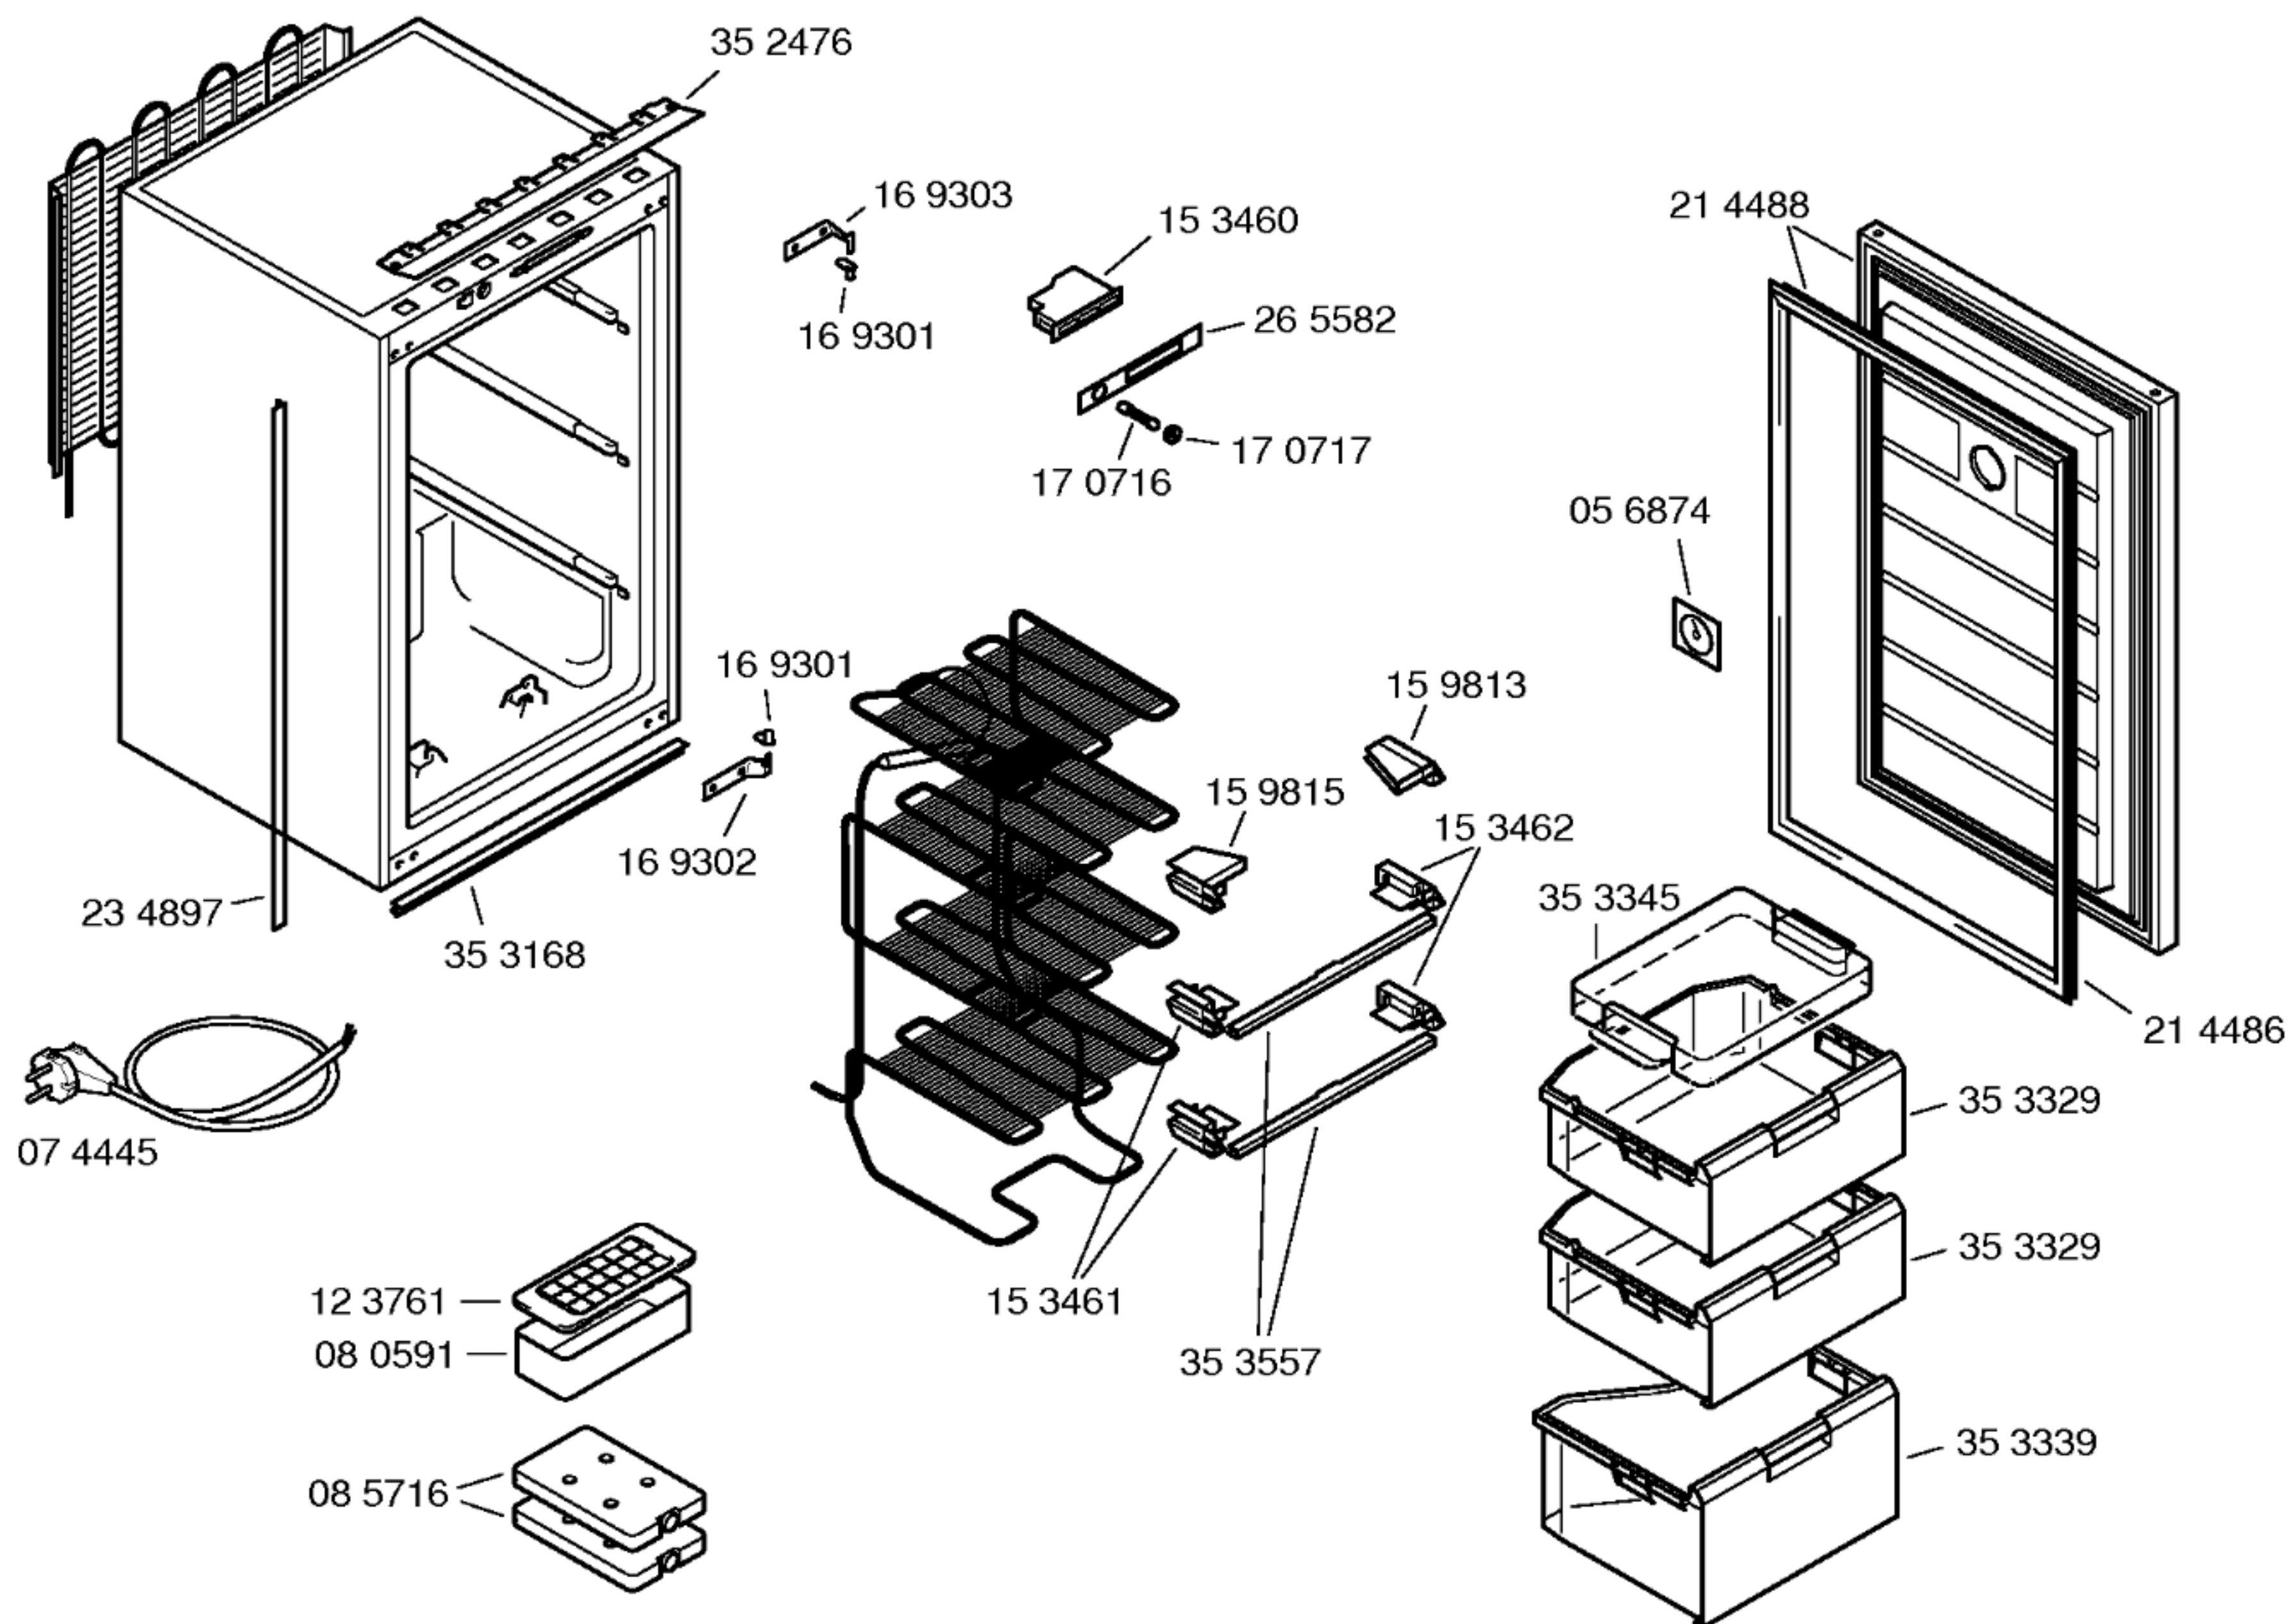


Gebrauchsanweisung
52 8757
(D,GB,F,I,NL,DK,N,S,
SF)

Montageanleitung
52 1893
(D,GB,F,I,NL,DK,N,SF,
SE,P)

Beistellsatz
26 5162

Temp.-Regler
Rep.-Satz
26 5271

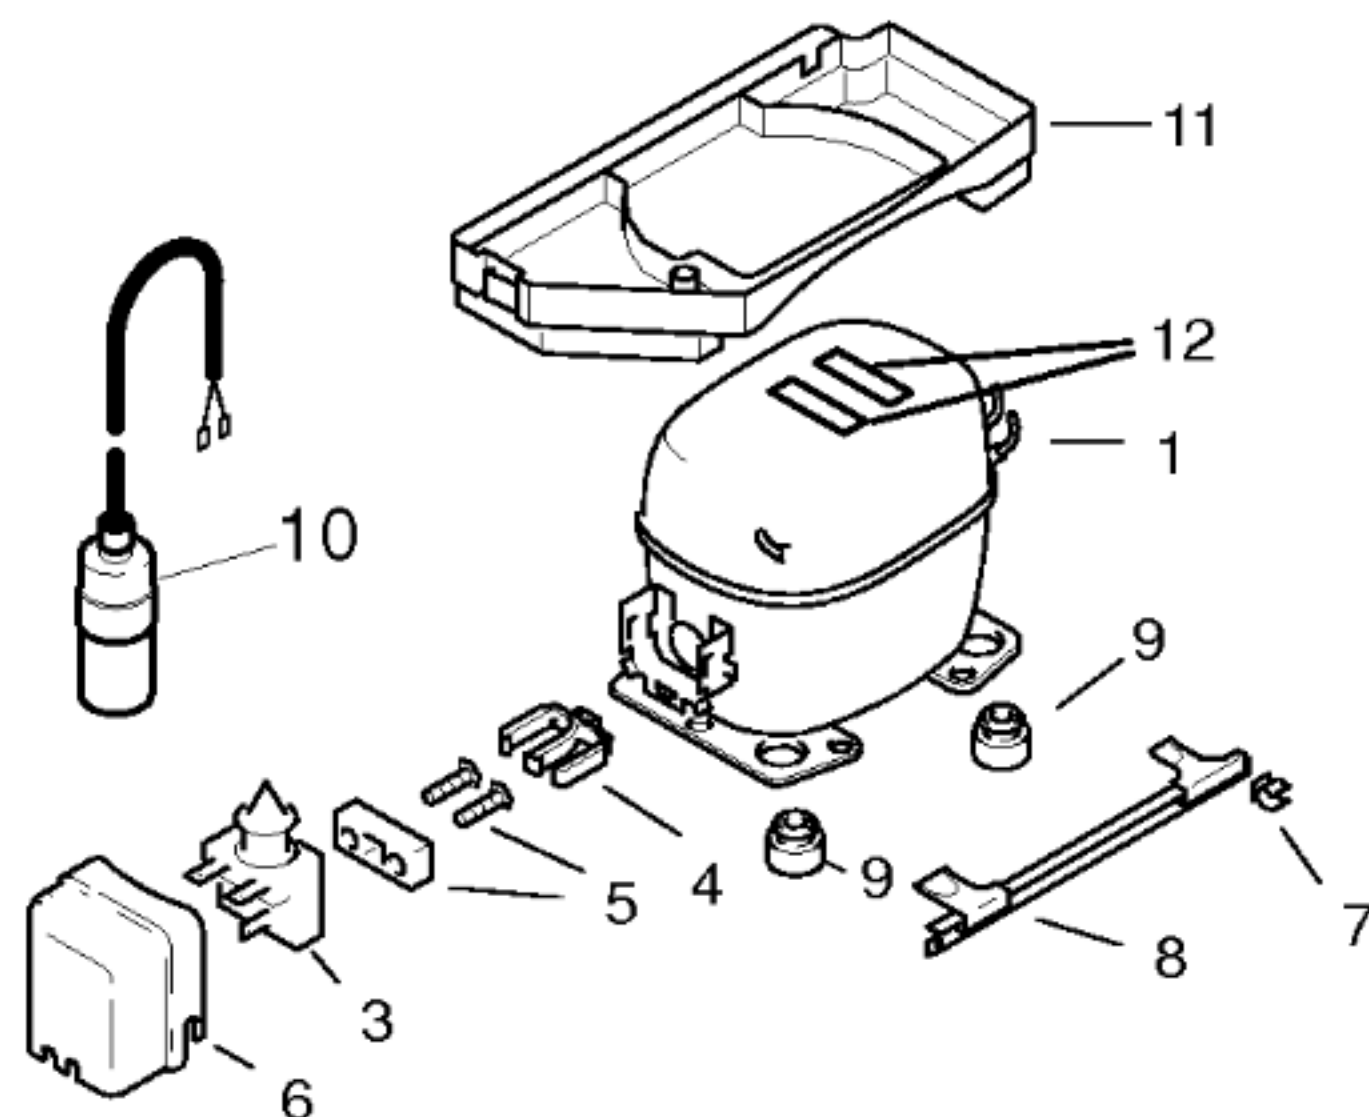Mat. – Nr. – Konstante
3740

	V01	V02	
Pos.	Matsushita	Goldstar	
	ESS 60E	NDA69NAEM	
1	14 2158	141999	
2			
3	18 3589	17 0743	
4			
5	18 3590	17 0745	
6	18 3591	17 0744	
7	16 9319	16 9319	
8	26 4879	26 4879	
9	05 0166	05 0166	
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Matsushita	Goldstar	
Typ/Type		ESS 60E	NDA69NAEM	
Förderleistung/Delivery/Débit		l/h	1076	1242
Anlaufstrom/Starting current/Cour de démarrage		A	5,6	
Widerstand/Resistance/Résistance Ha/main/prin		Ω	30,6	
Hi/aux		Ω	26,7	
Temp.-Regler/Thermostat		KER		
Typ/Type		RCO		
Regelstellung/Position		kalt	warm	
Schaltwerte/Switching values		ein"	-23,0	-15,0
Valeurs de commutation		aus"	-31,0	-21,0
"alarm"				
Füllmenge/Fill.quantity/Charge		R600a	*	
Anschlußwert/Conn.load/Puiss. connectée		W	63	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Temp.-Regler/Thermostat				
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		