


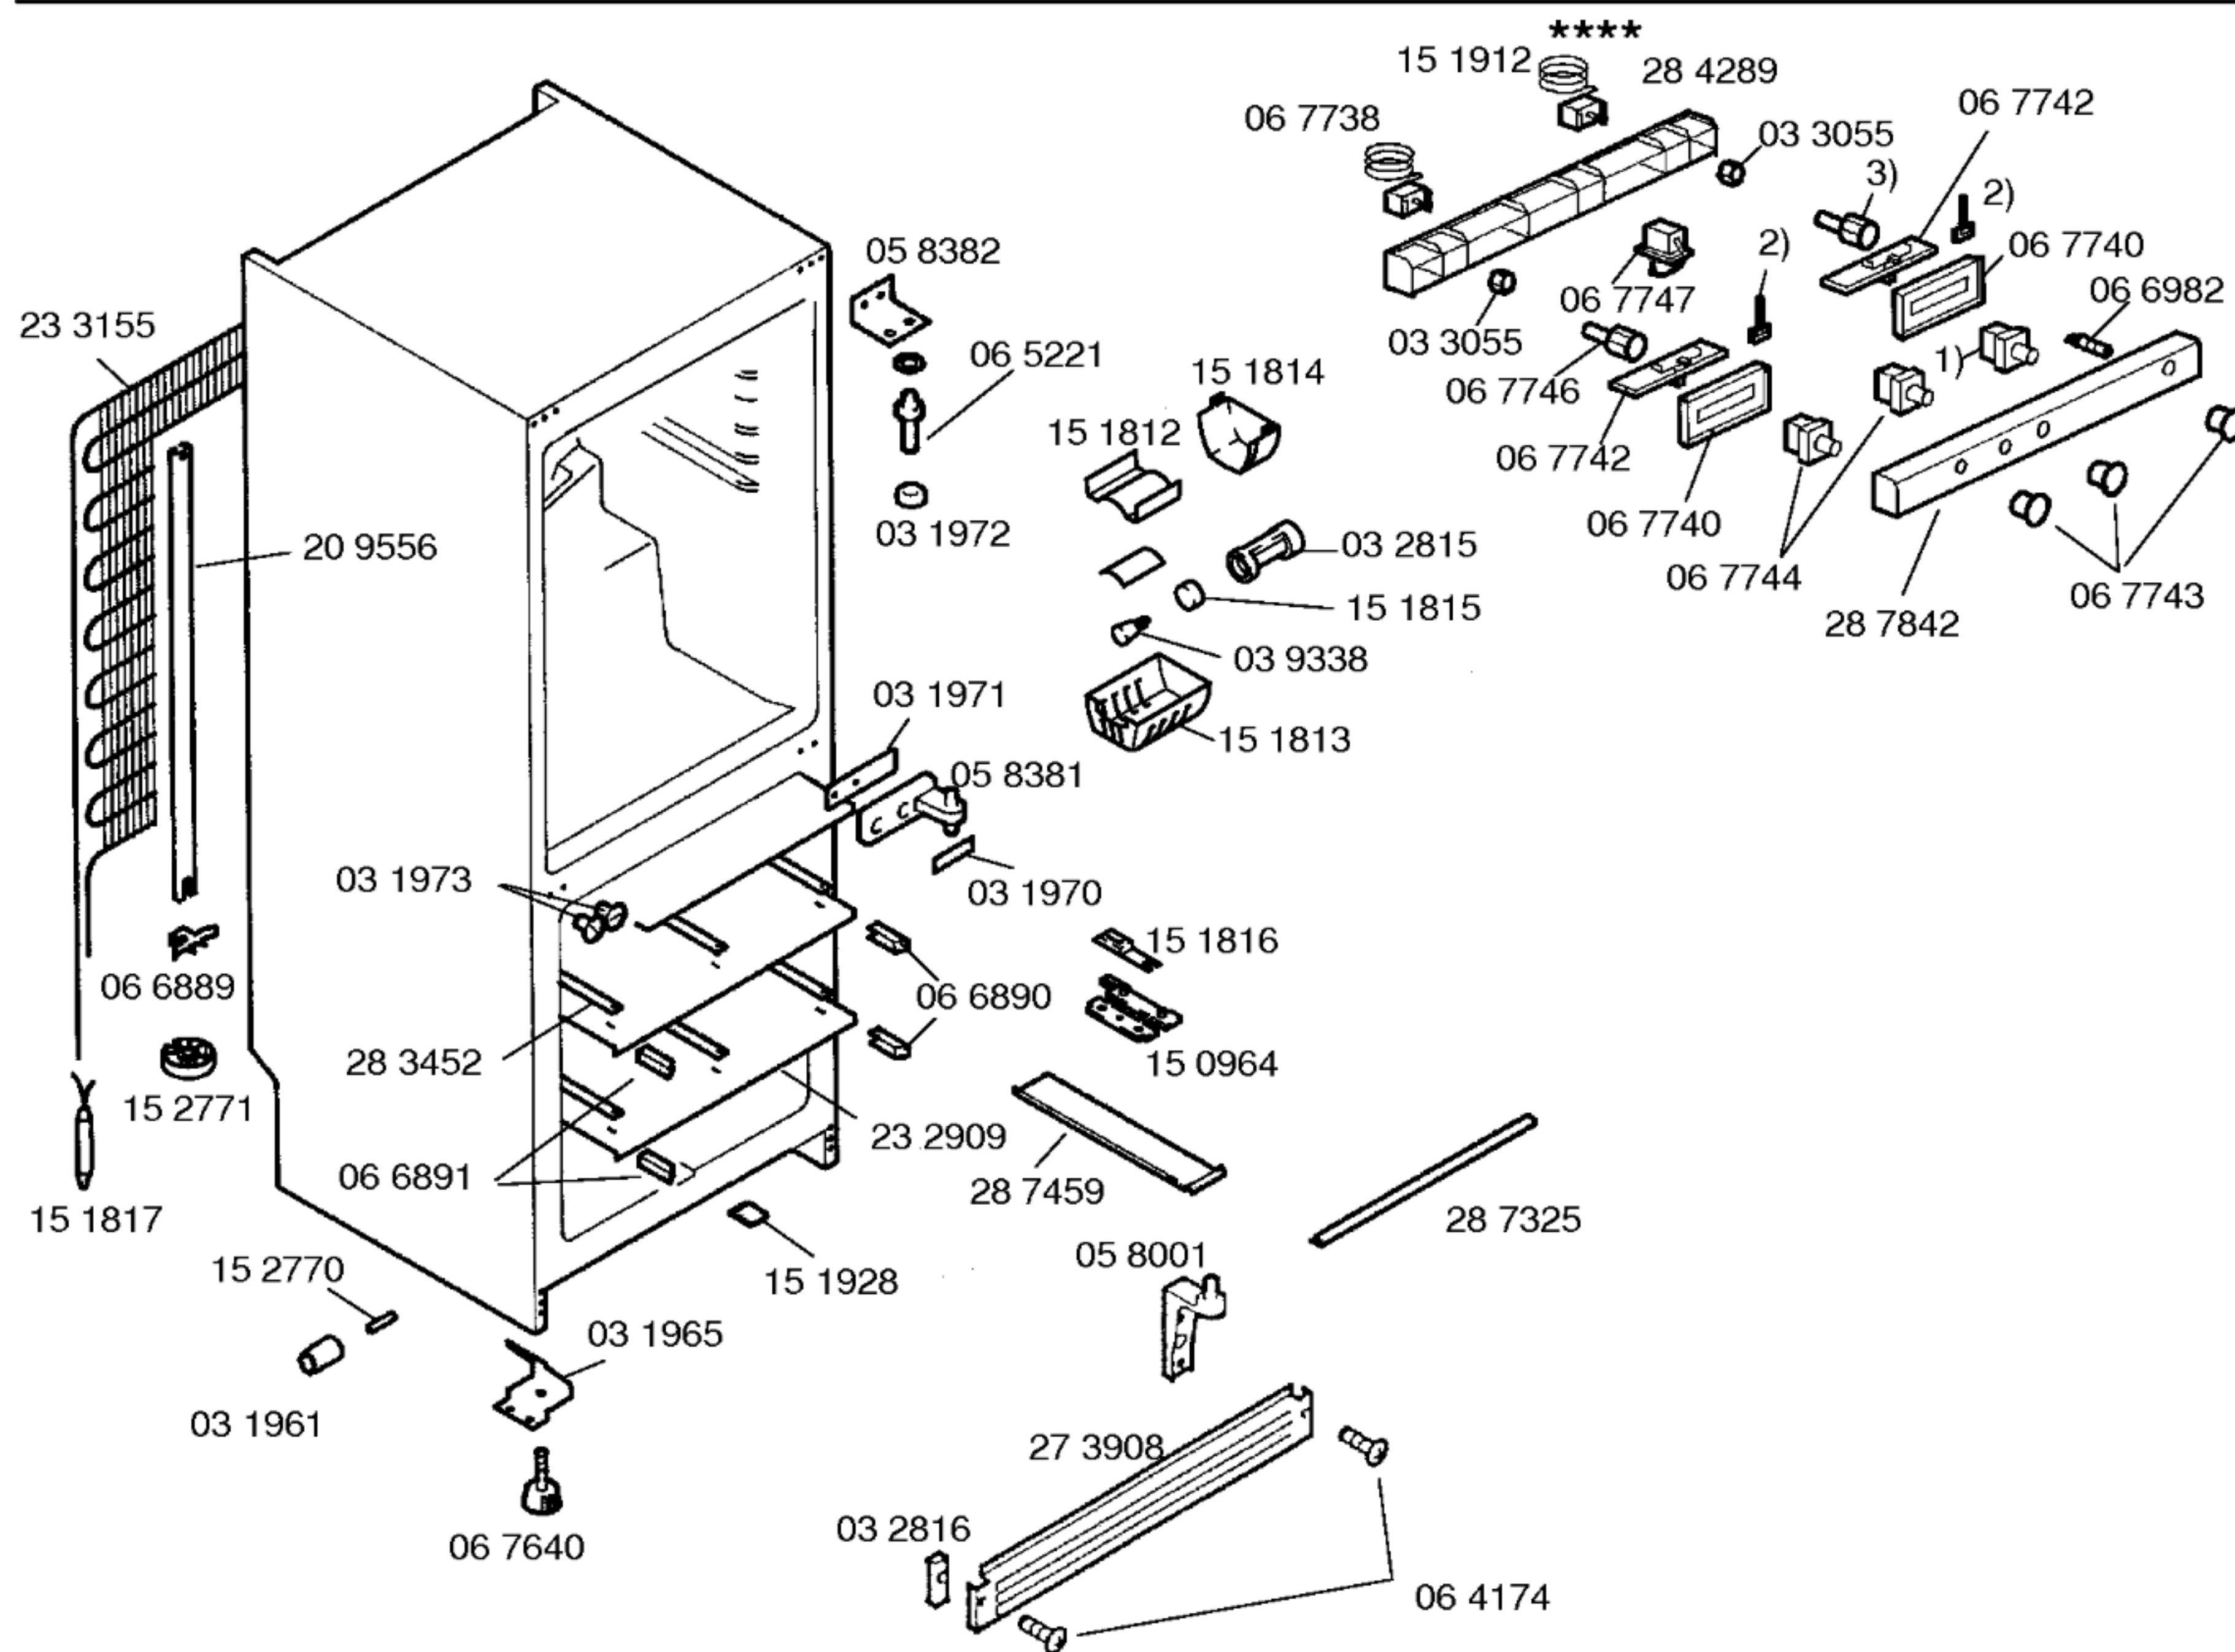


Libro de instrucciones
51 7464
(E,P,GB,F,NL,GR)


1) 06 7745

2) 06 7748

3) 06 7746

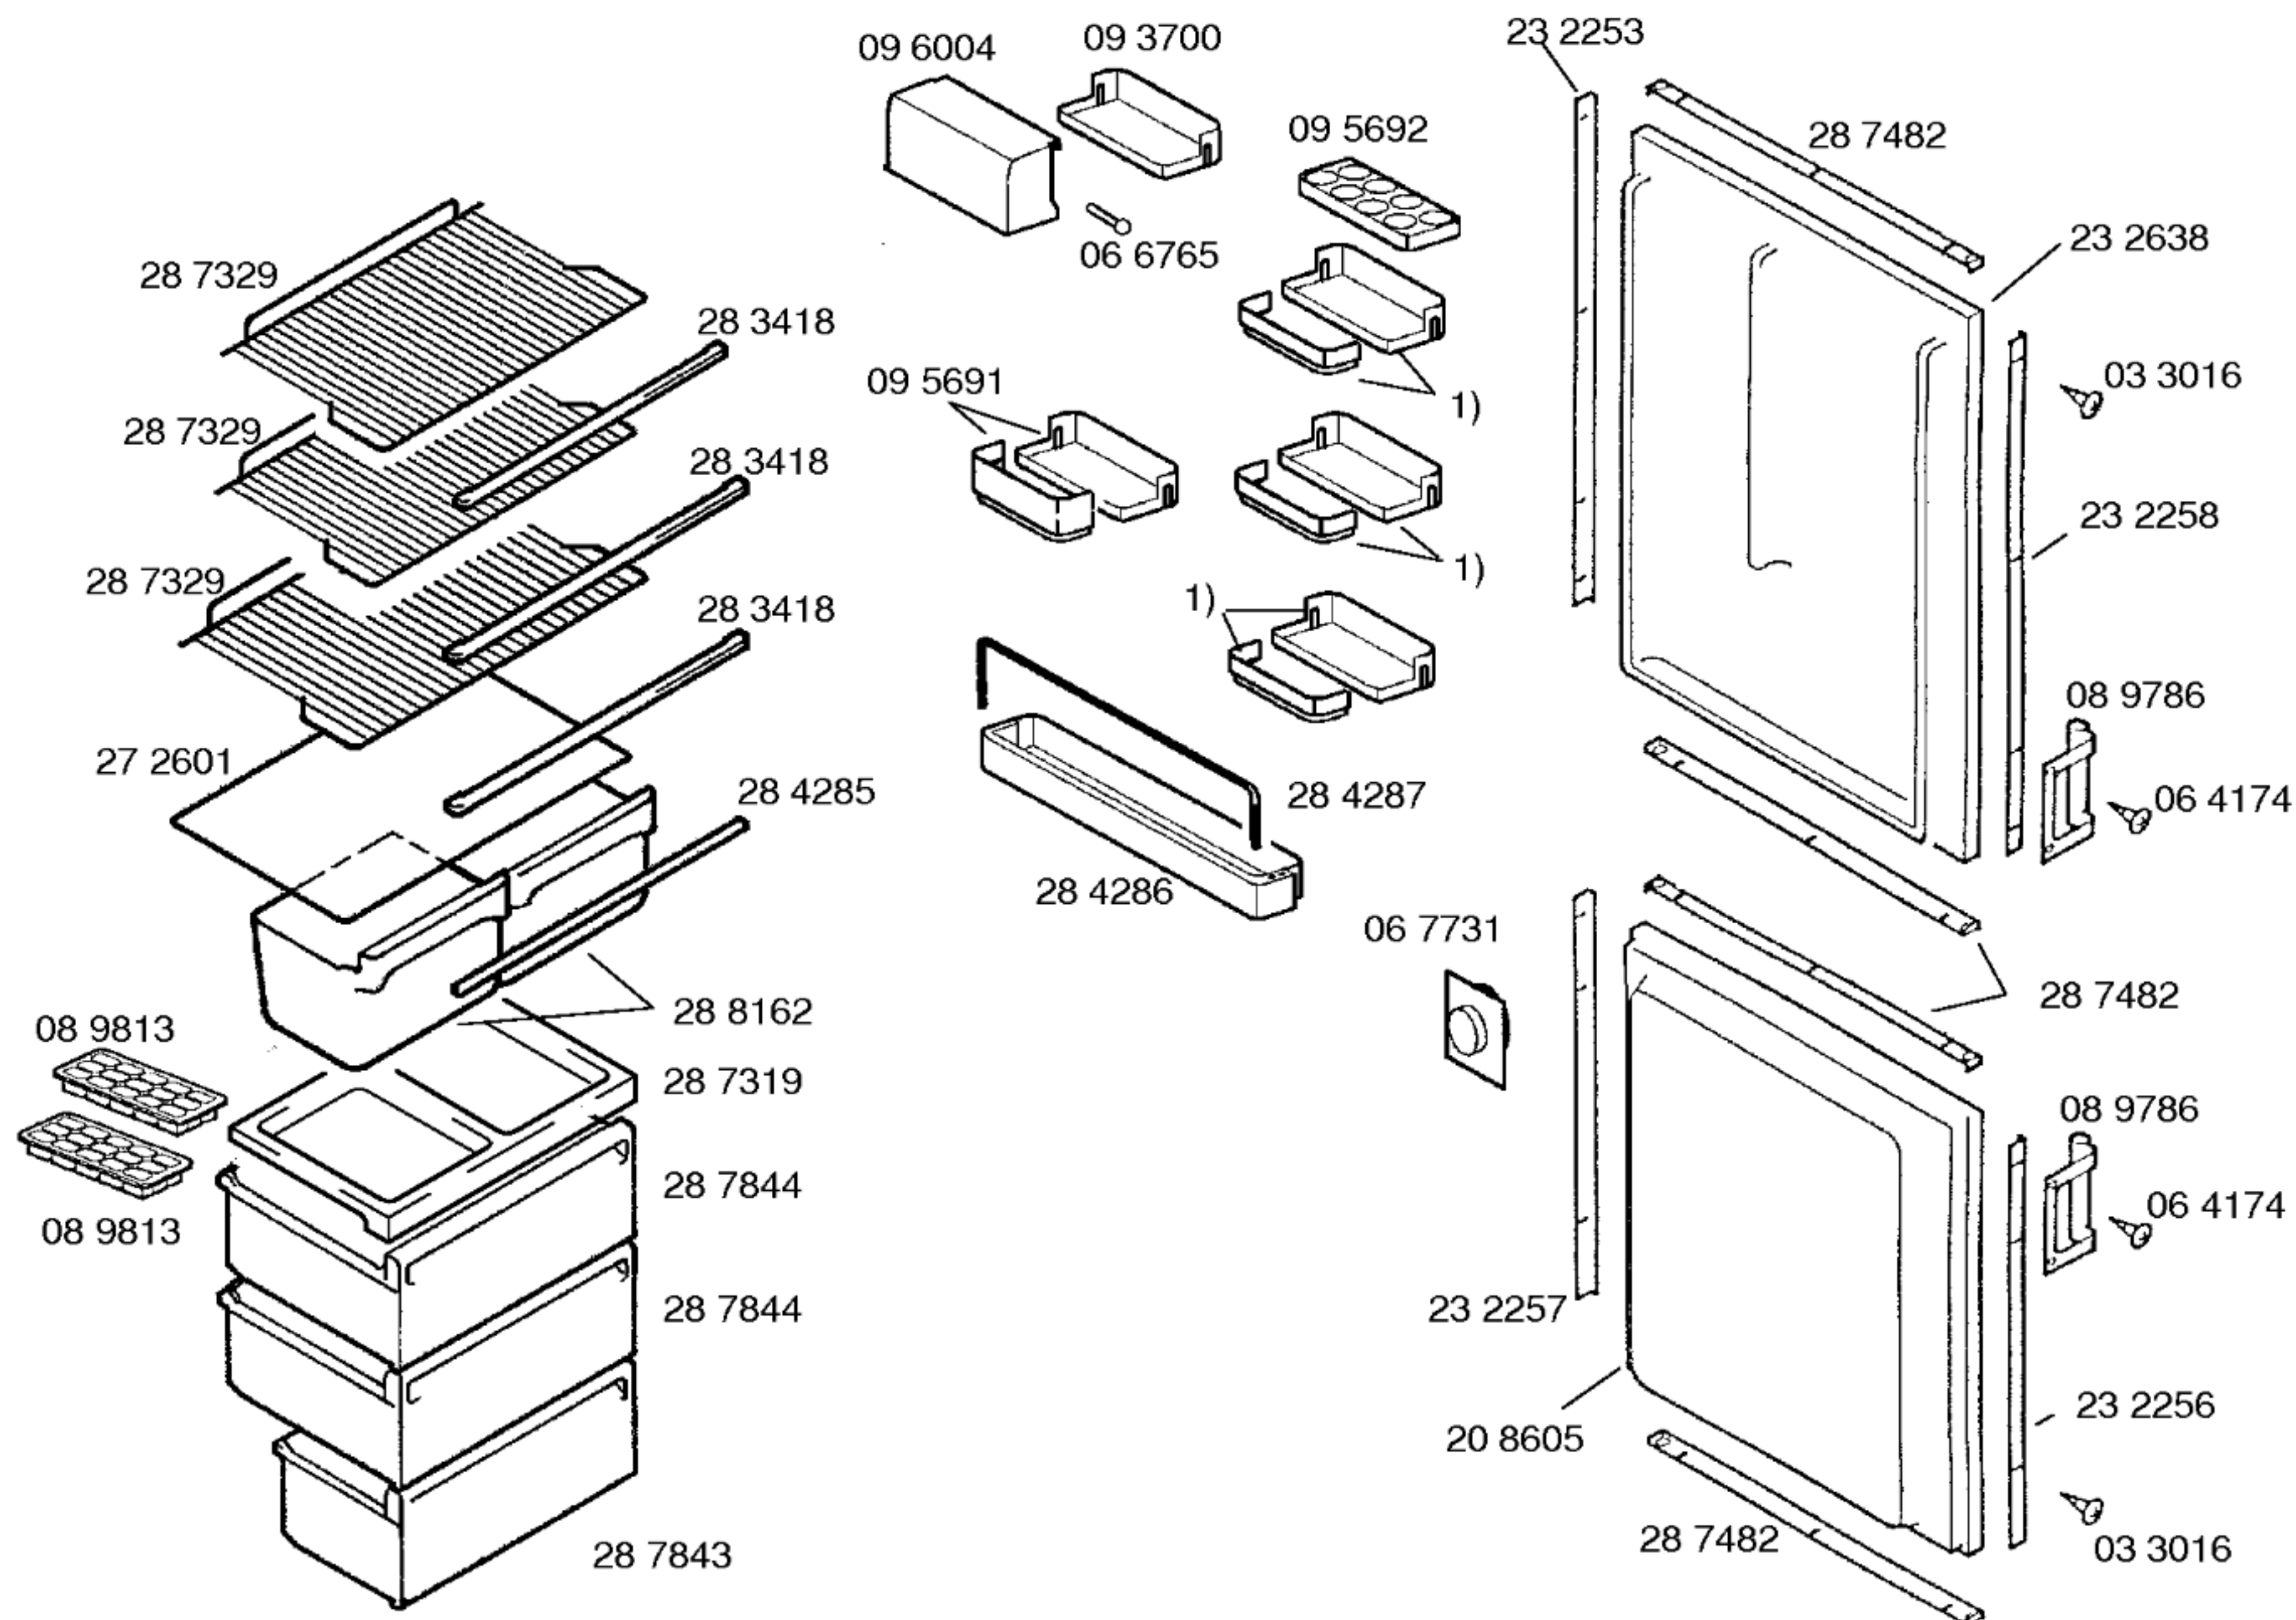

1) 09 5690

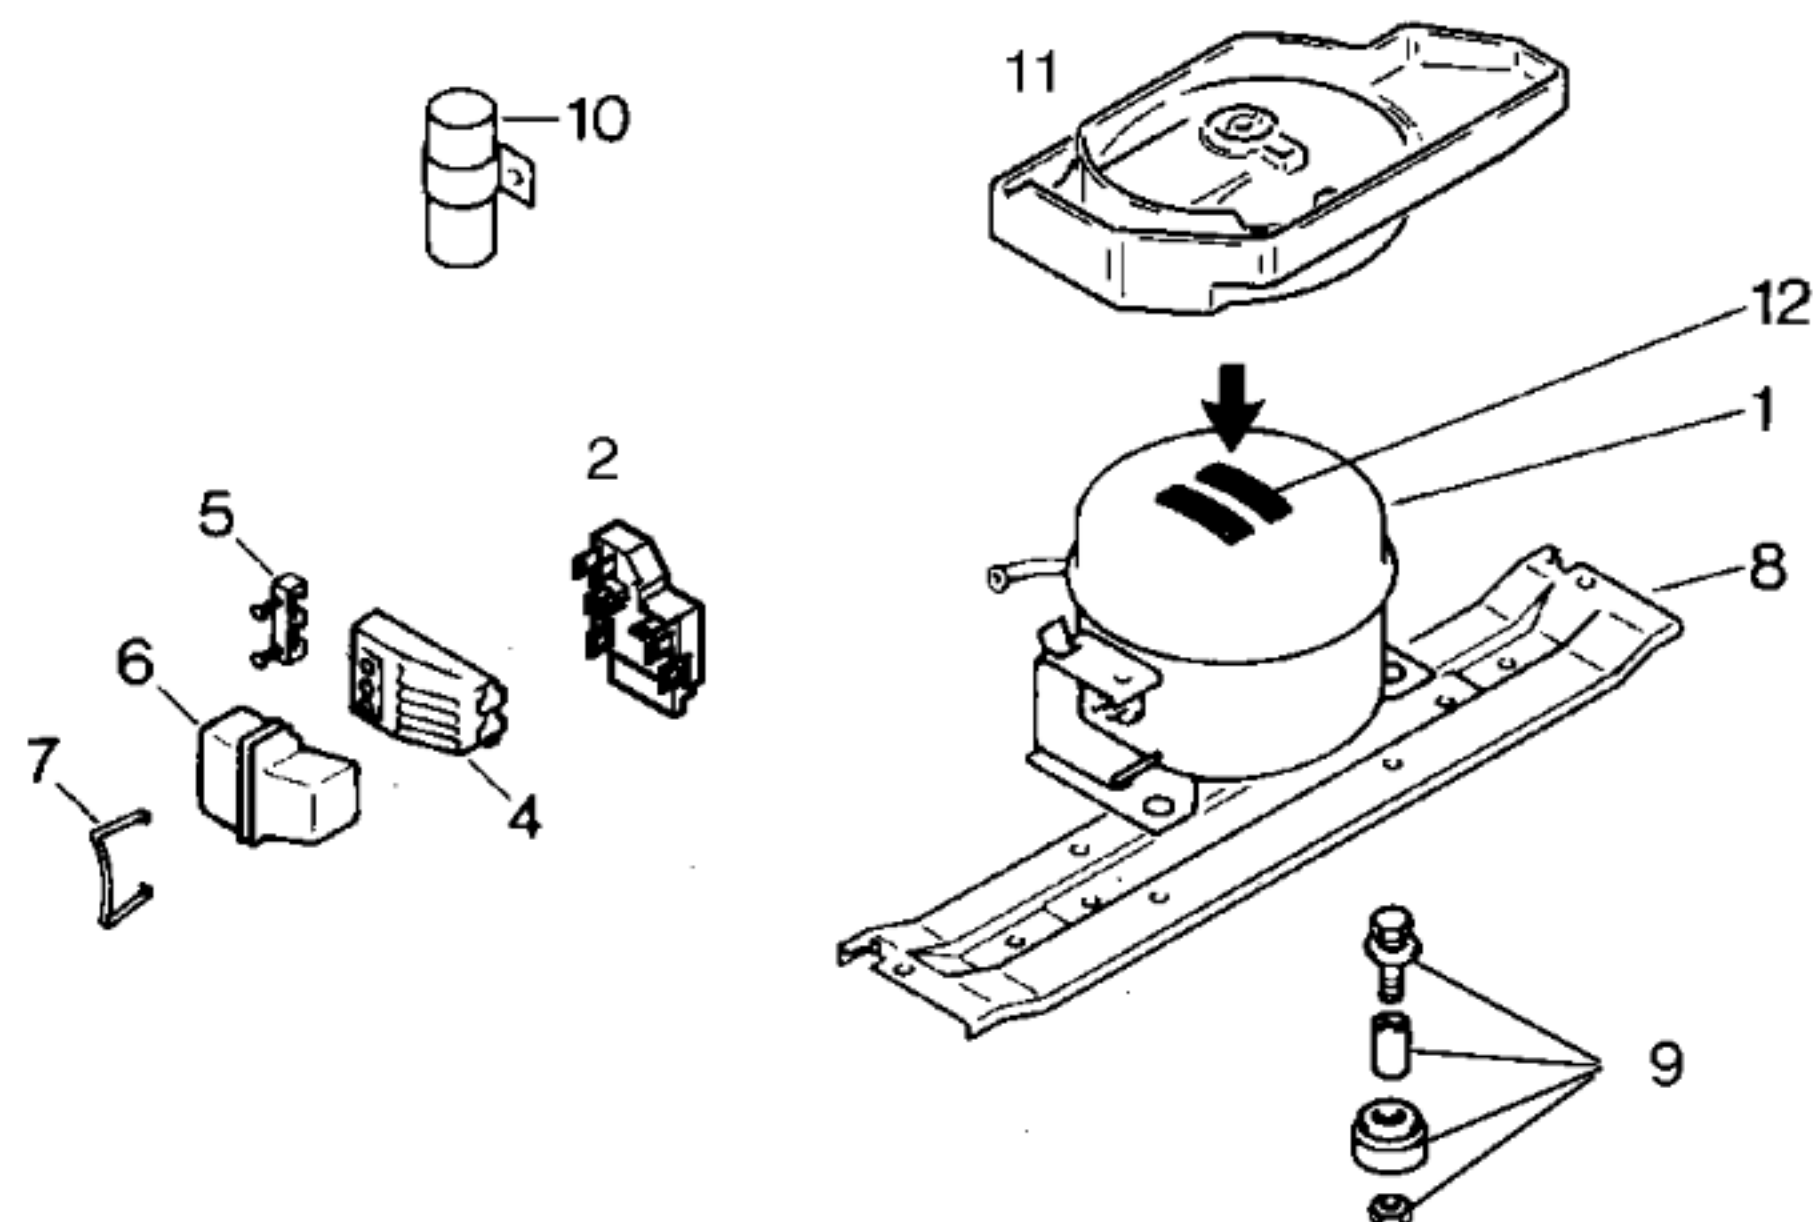

Pos.	ASPERA BPM1084Z	U. HERMÉT. GL45AA
1	14 1343	14 1374
2	15 4315	15 5130
3		
4		
5		
6		
7		
8	28 8253	
9	05 0166	05 0166
10		
11	09 6883	
12		
13		

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS

Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo Förderleistung/Delivery/Debit/Aspiración l/h Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm Hi/aux.	ASPERA BPM1084Z	U. HERMÉT. GL45AA 8,3 21,2 24,3
---	--------------------	---

Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo Reglerstellung/Position/Conexión Schaltwerte/Switching values/ ..ein/conex. °C Valeurs de commutation/Desconex. ..aus"/descon. (..abtaven' od) ..alarm'	DANFOS 077B62 MIN.-MAX +6° -13° -28°	RANCO K54 L1924 MIN.-MAX -14° -24° -21° -31° -15
--	--	---

Füllmenge/Fill. quantity/Charge/Carga 134a	g	50	125
--	---	----	-----

Anschlußwert/Comm. load/puiss. Connect./Potenc.	W	84	87
---	---	----	----

Heizung/Heater/Chauflage/Resistenc.descong. Widerstand/Resistance/Resistencia Leistung/Power/Puissance/Potencia	Ohm W		
---	----------	--	--

Ventilator/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia	Ohm		
---	-----	--	--

Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia Spannung/Volare/Tension/Tensión	Ohm V		
---	----------	--	--

Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador			
--	--	--	--