



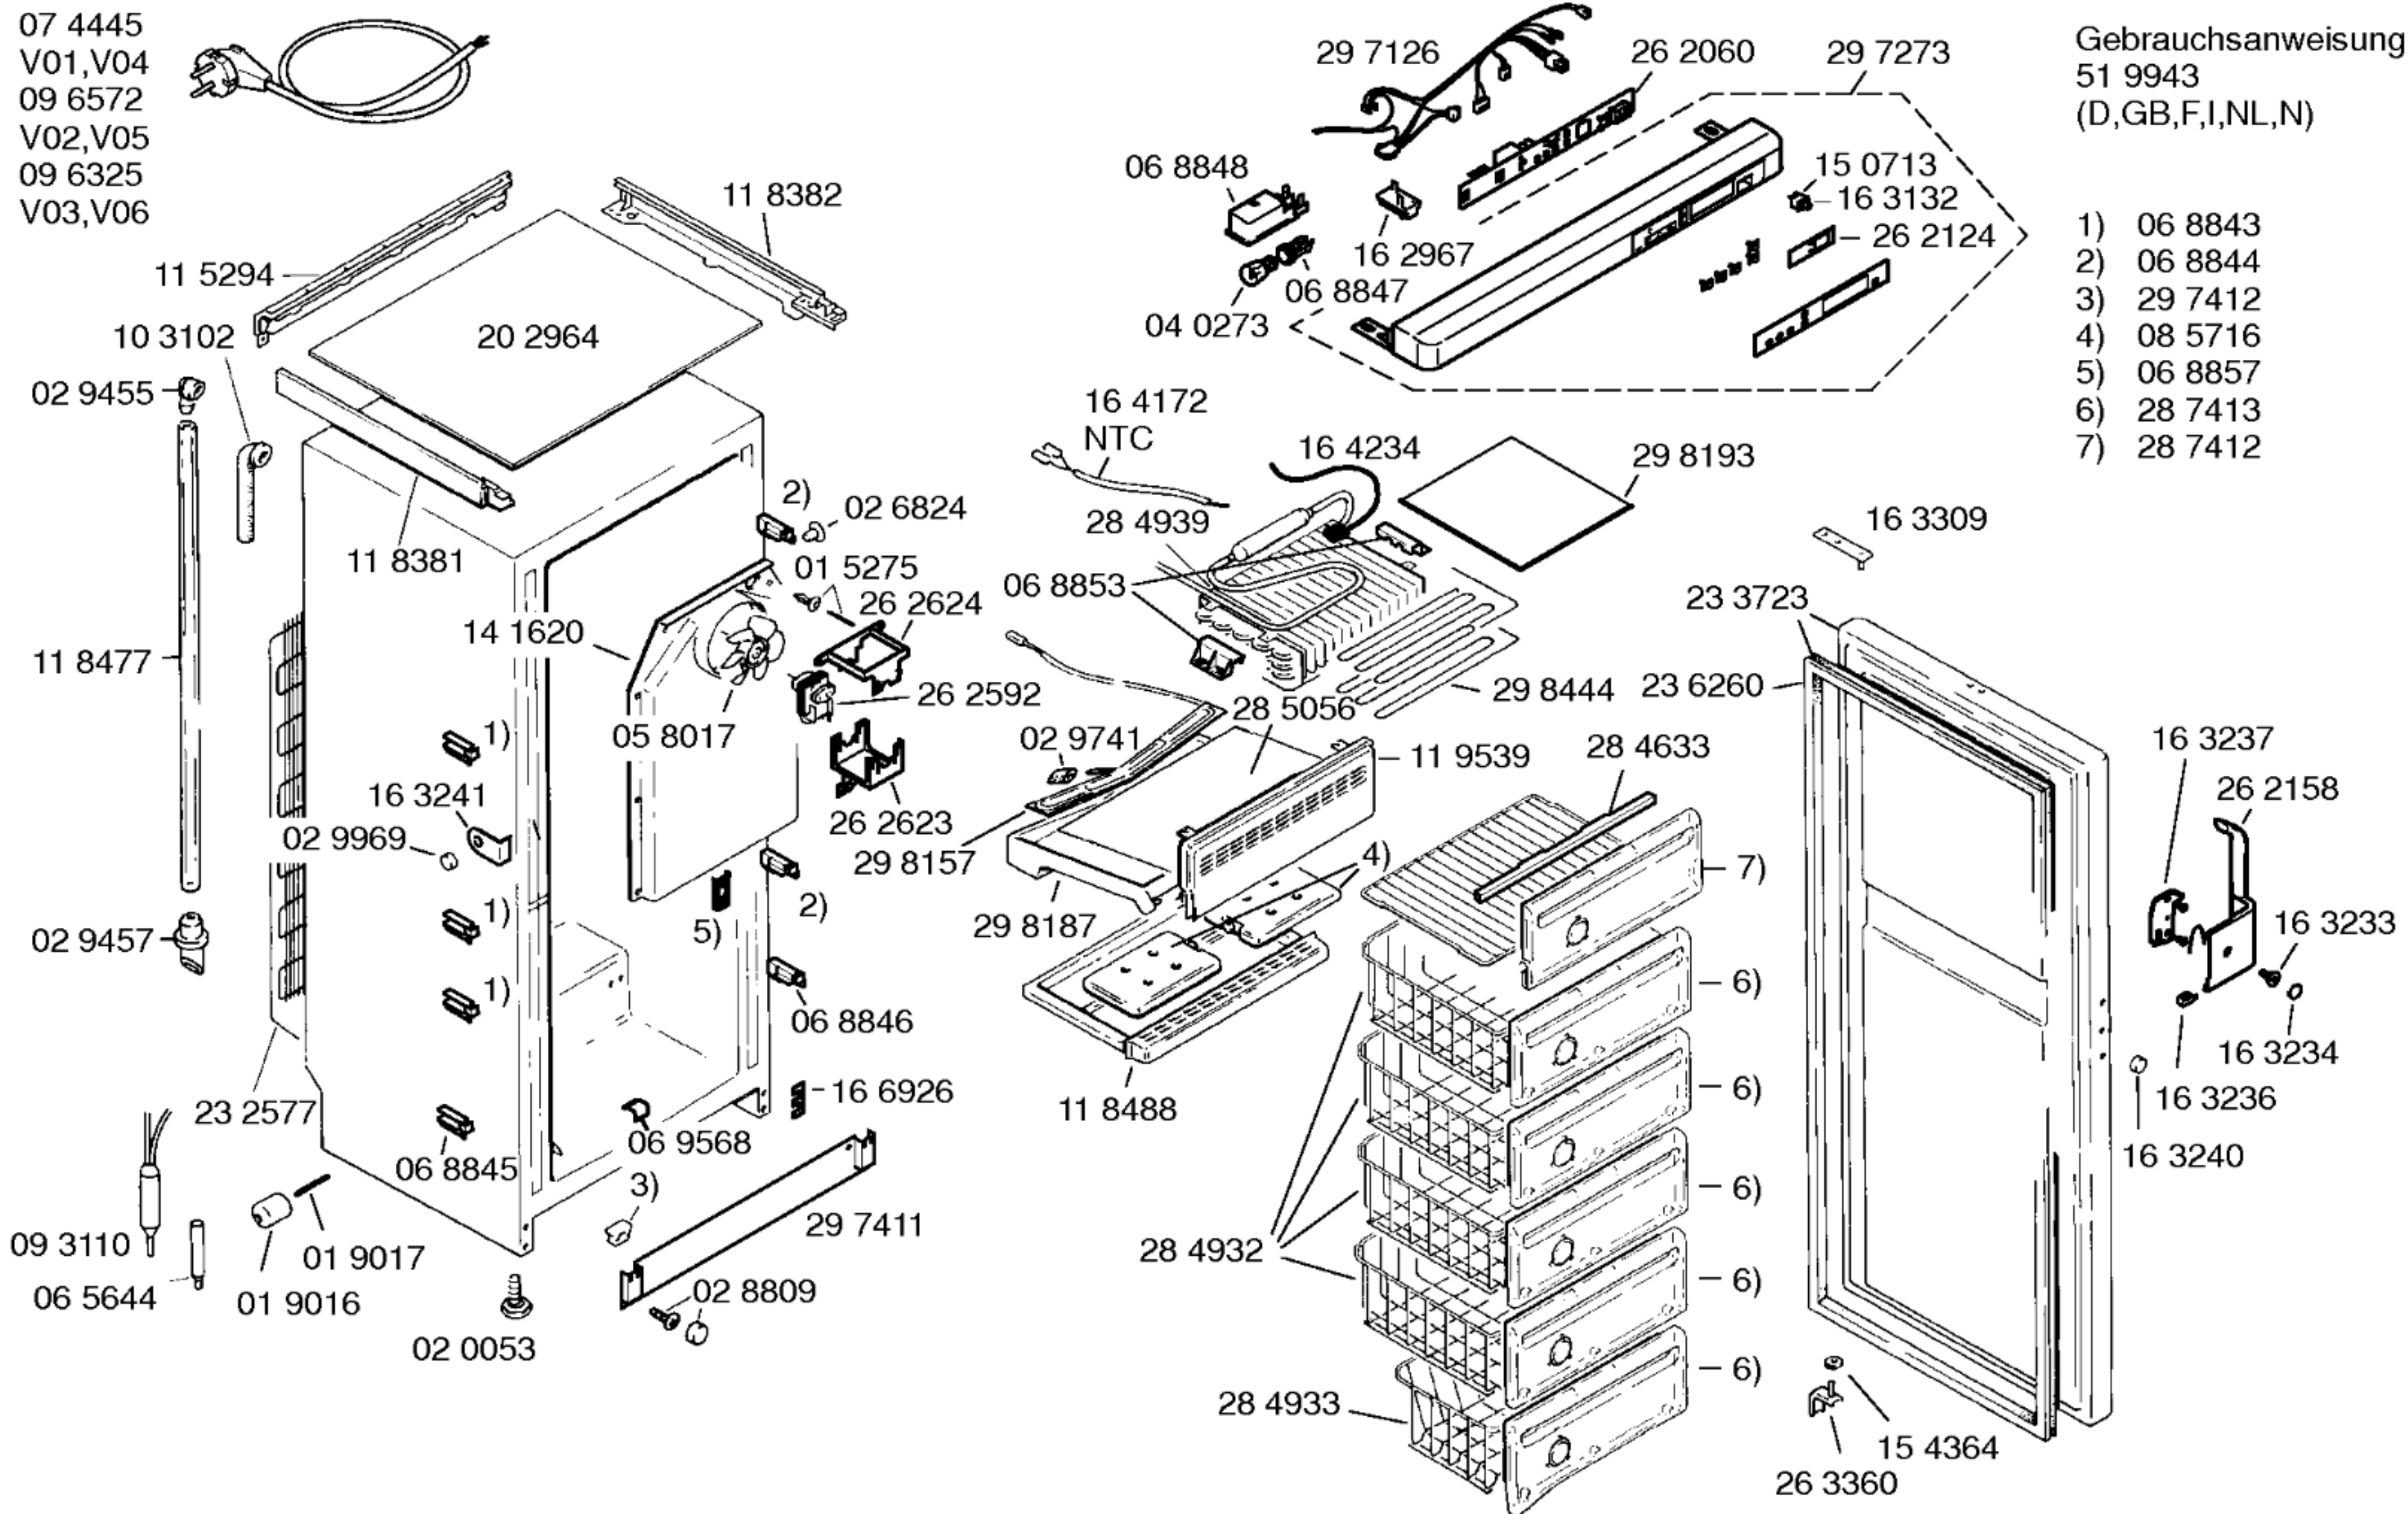

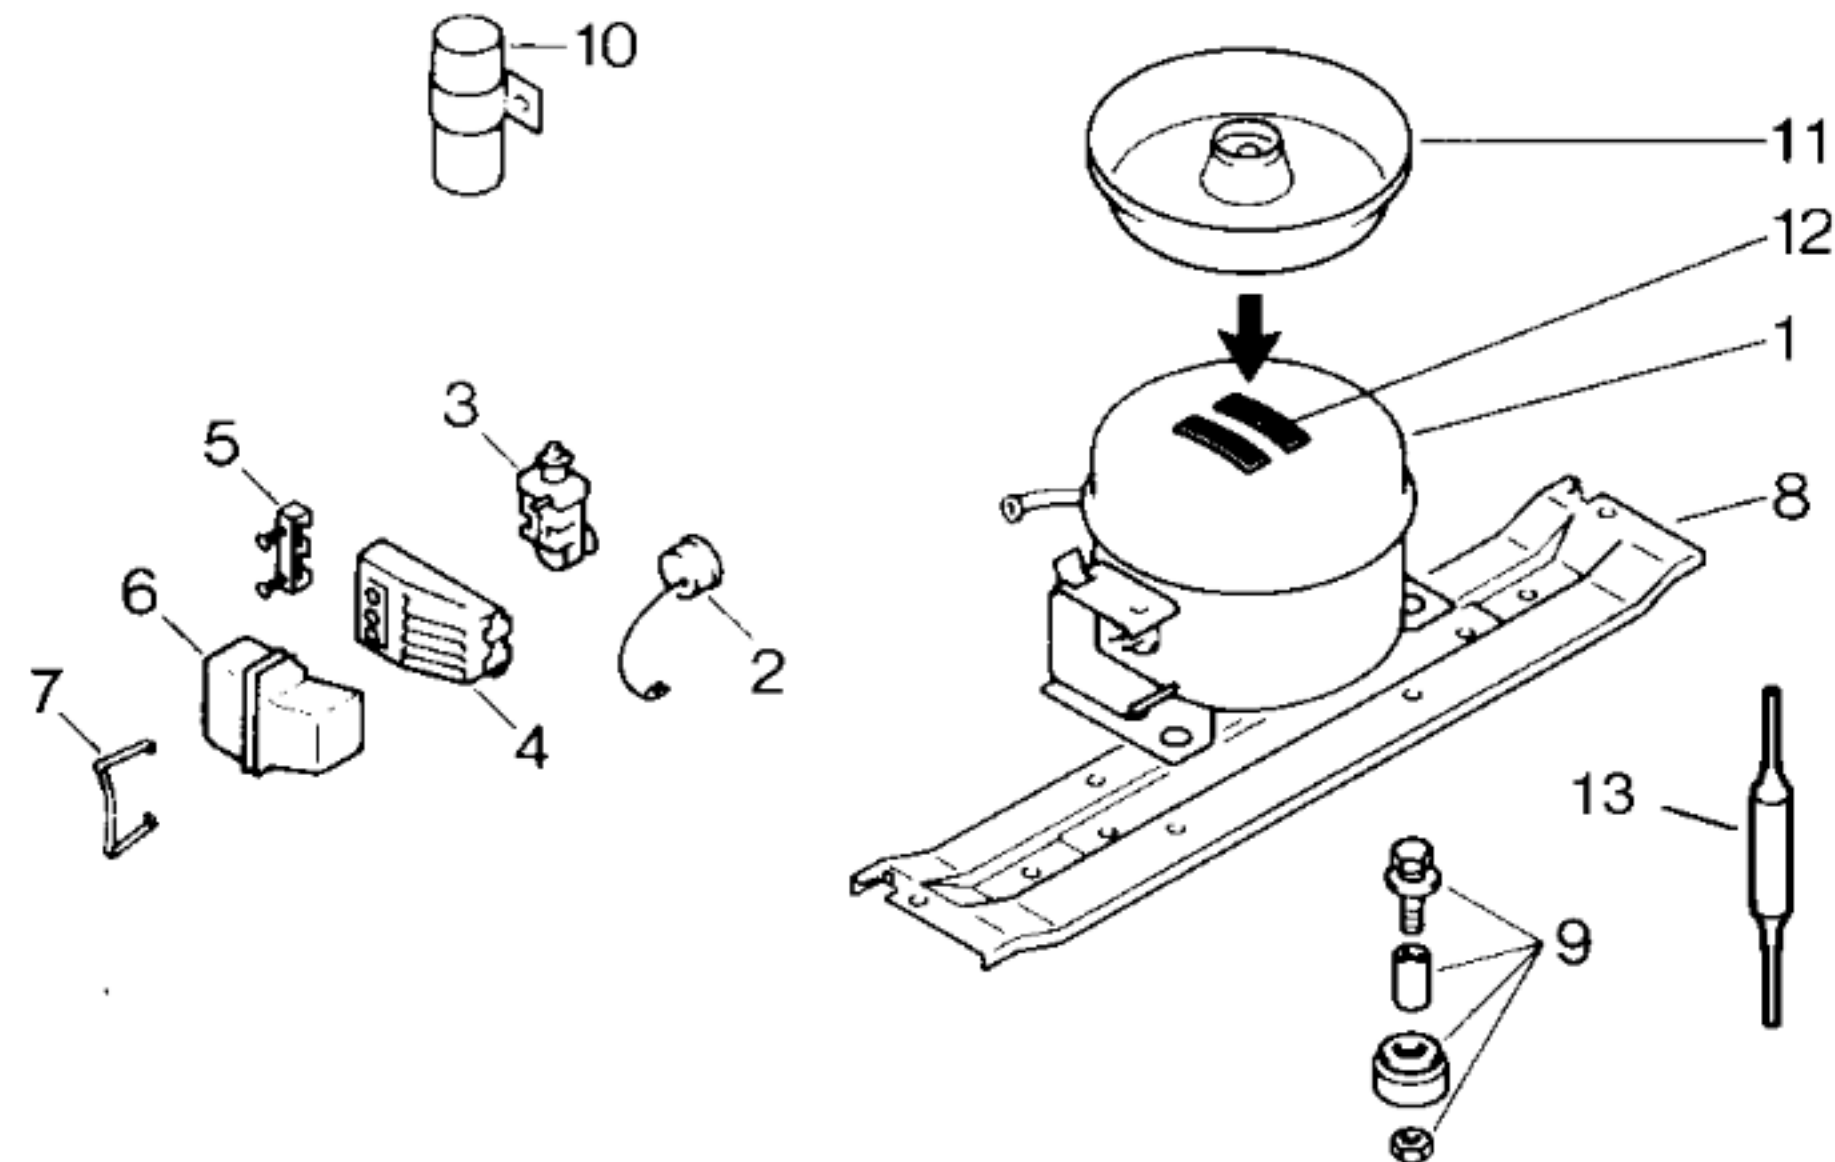

Pos.	Matsushita	Danfoss	
1	14 1556	14 1684	
2			
3	03 2035	15 1055	
4			
5	16 2549	15 0760	
6	05 8458	15 1072	
7	02 2673		
8	11 1567	27 8207	
9	05 0166	05 0166	
10	15 2222		
11	08 8535	08 8535	
12	05 6008	09 6212	
13	35 0026		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Matsushita		Danfoss		
Typ/Type		DA 12 SE		NLY 13 K		
Förderleistung/Delivery/Débit		l/h	2250	2394		
Anlaufstrom/Starting current/Cour de démarrage		A	8,7	11,3		
Widerstand/Resistance/Résistance		Ω	12,0	11,0		
Hi/aux		Ω	28,7	9,0		
Temp.–Regler/Thermostat		Elektronisch				
Solltemperatur–Einstellung		°C	EIN AUS			
		–18	–15 –16			
		–22	–19 –20			
		–26	–23 –24			
"alarm"			–9 –14			
Füllmenge/Fill.quantity/Charge		R600	siehe Typenschild			
Anschlußwert/Conn.load/Puiss. connectée		W	120			
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung		
Widerstand/Resistance/Résistance		Ω	173	6050 ± 730Ω		
Leistung/Power/Puissance		W	333	9,5		
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω	340			
Widerstand NTC–Fühler		°C	kΩ	°C	kΩ	°C
		–1	17,3	–15	36,5	–20
		–9	26,2	–16	38,8	–23
		–14	34,5	–19	45,9	–24
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				