

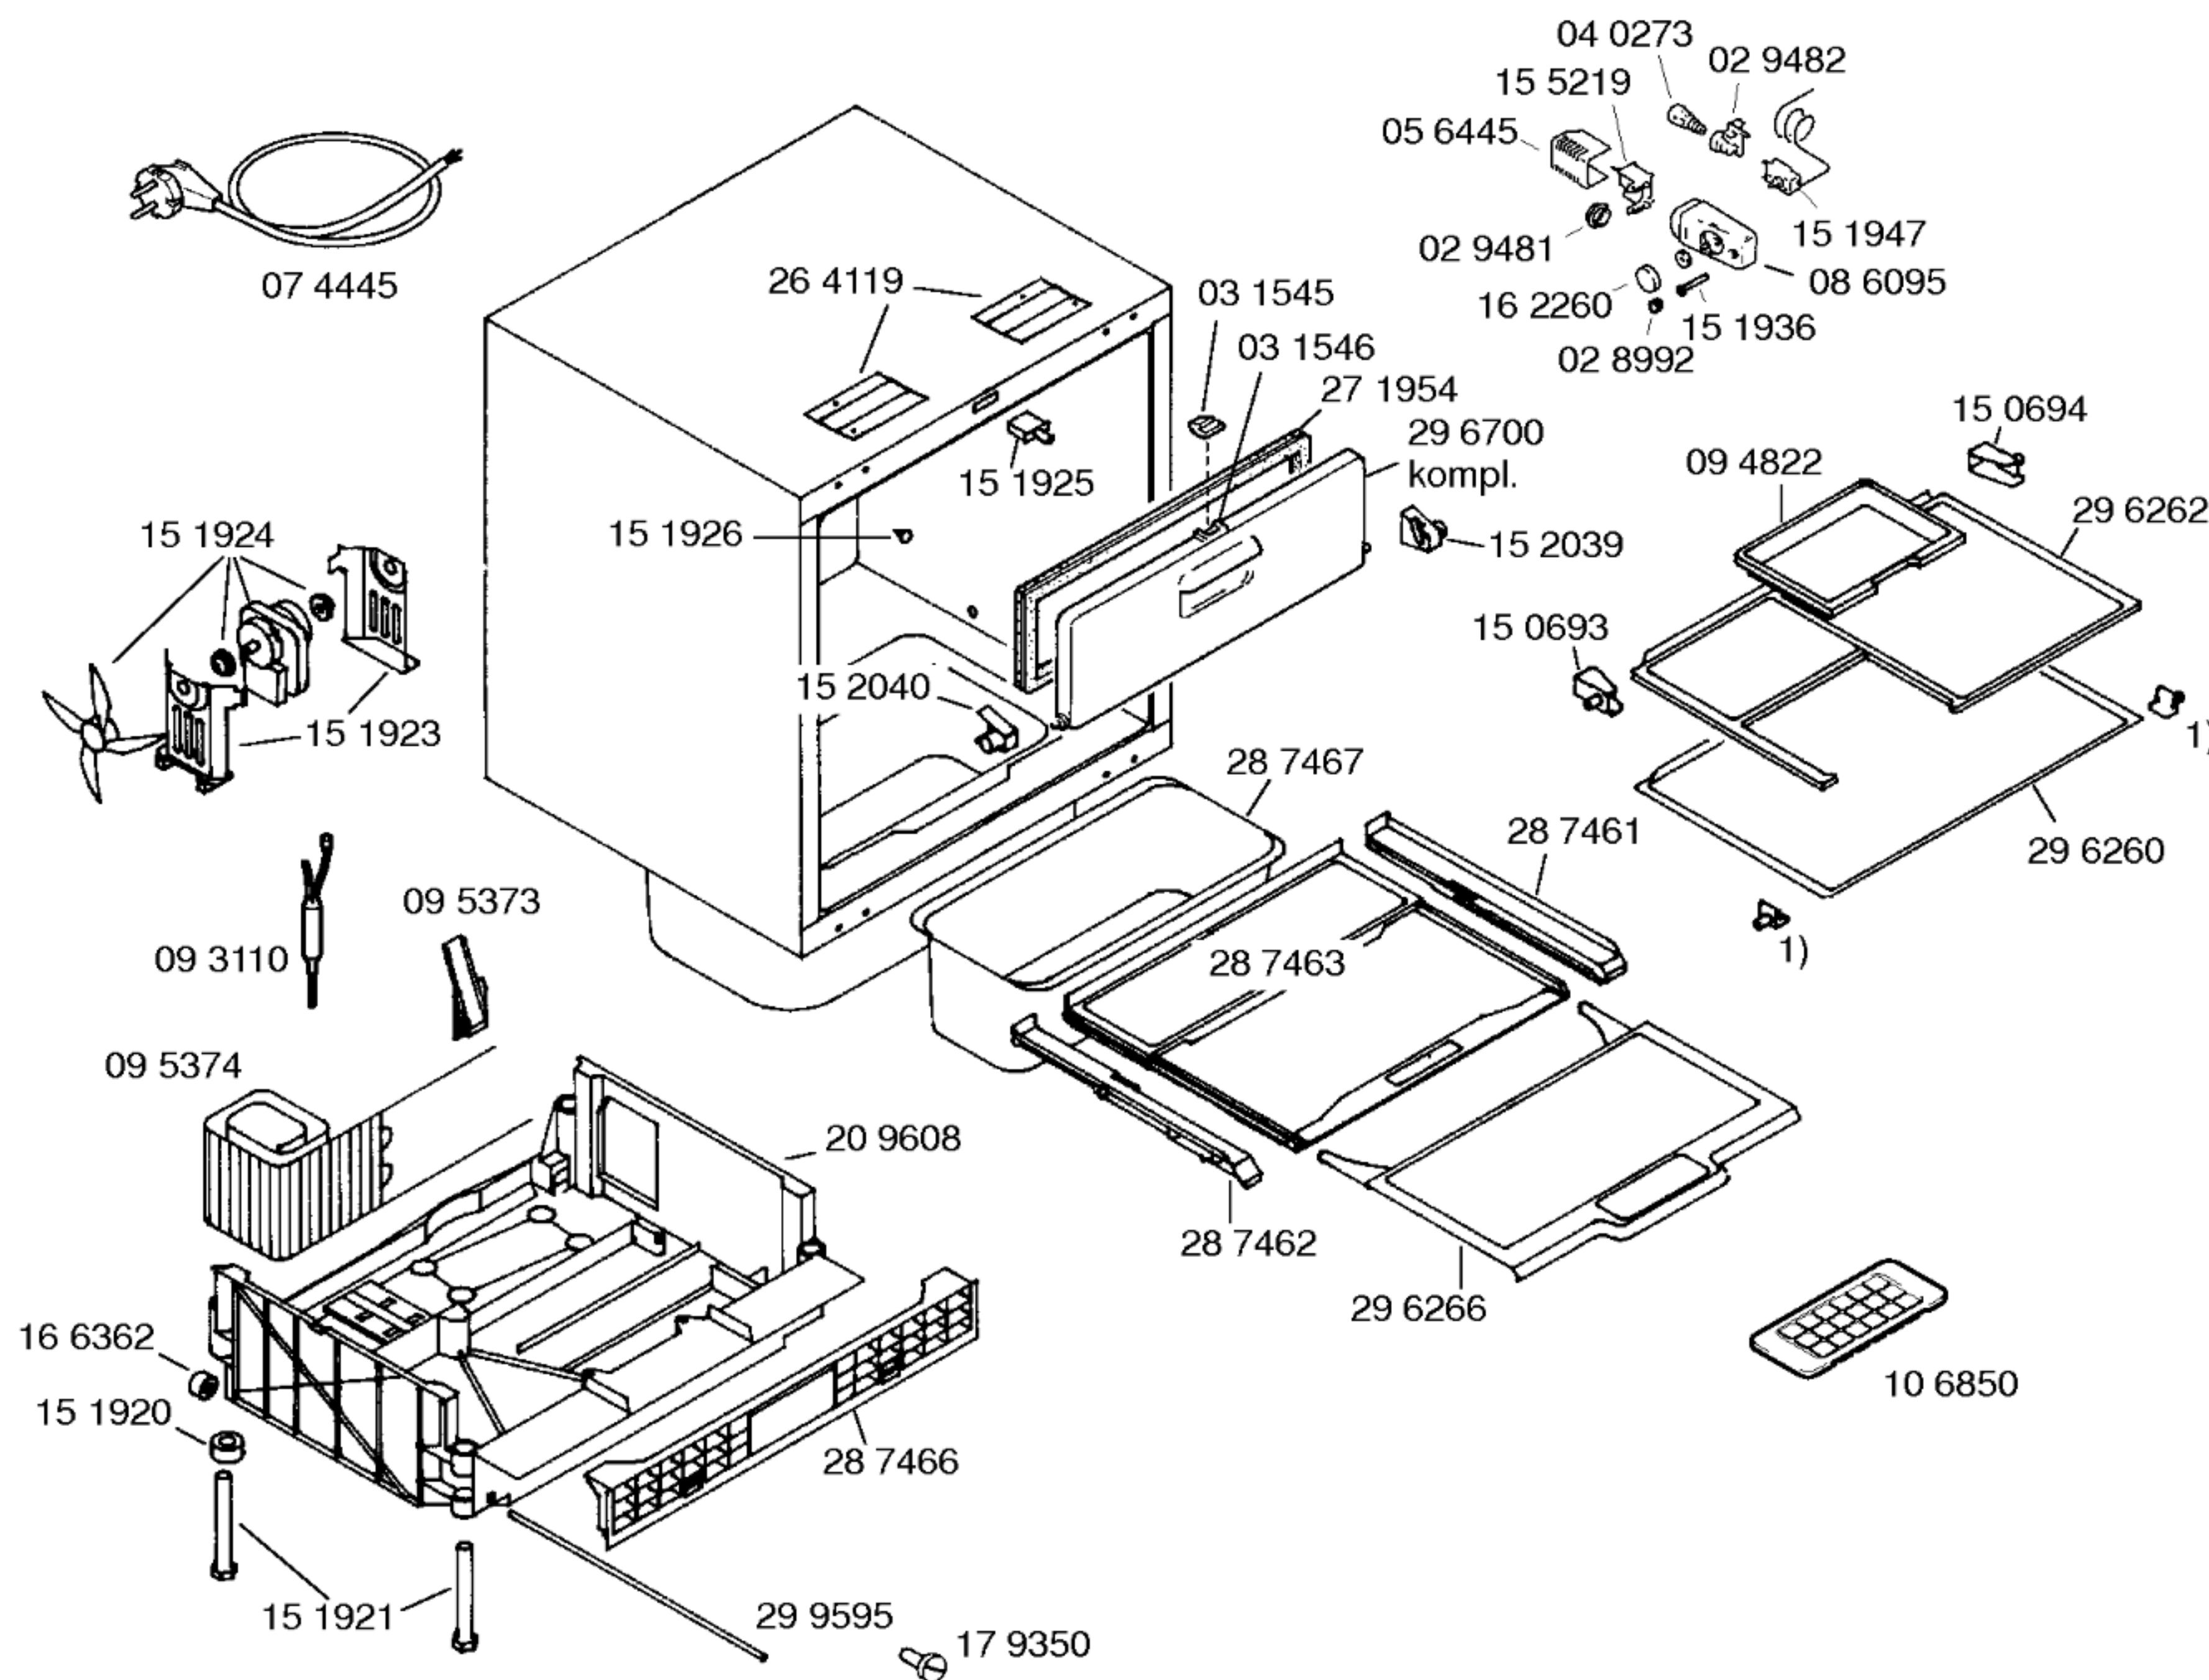


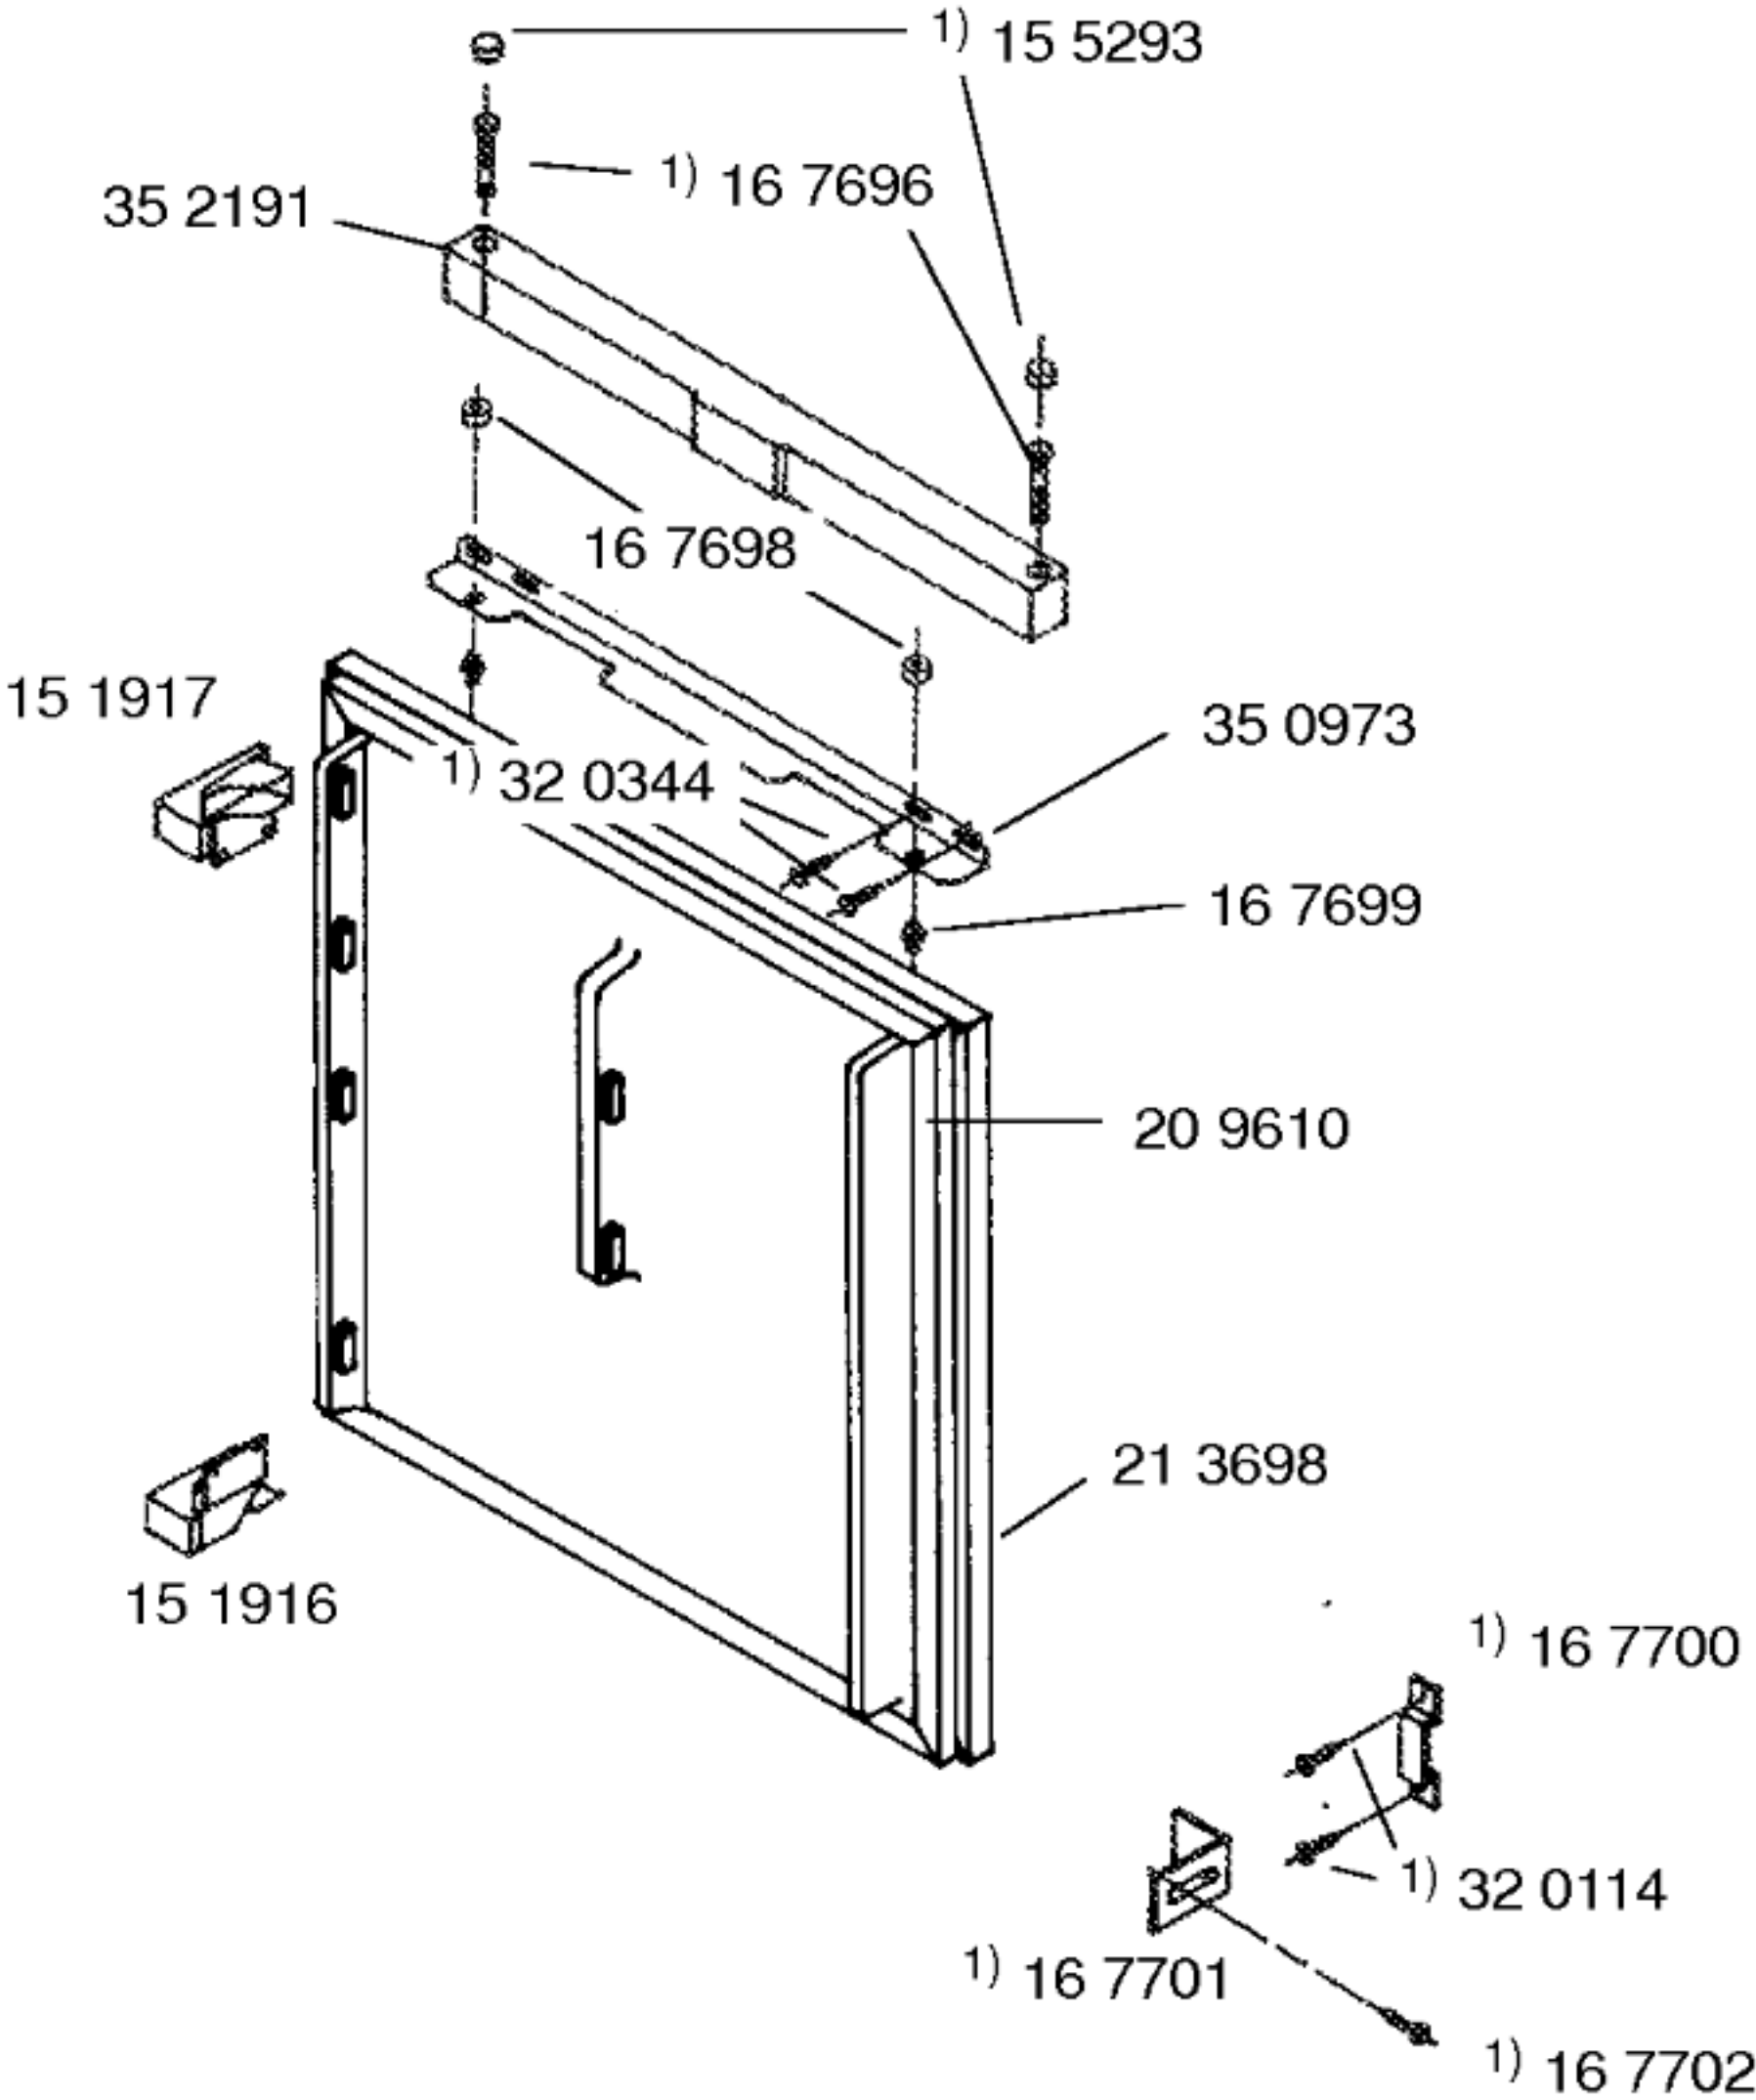


Gebrauchsanweisung  
51 9533  
Montageanleitung  
52 1679

1) 15 0692

1) 35 0986

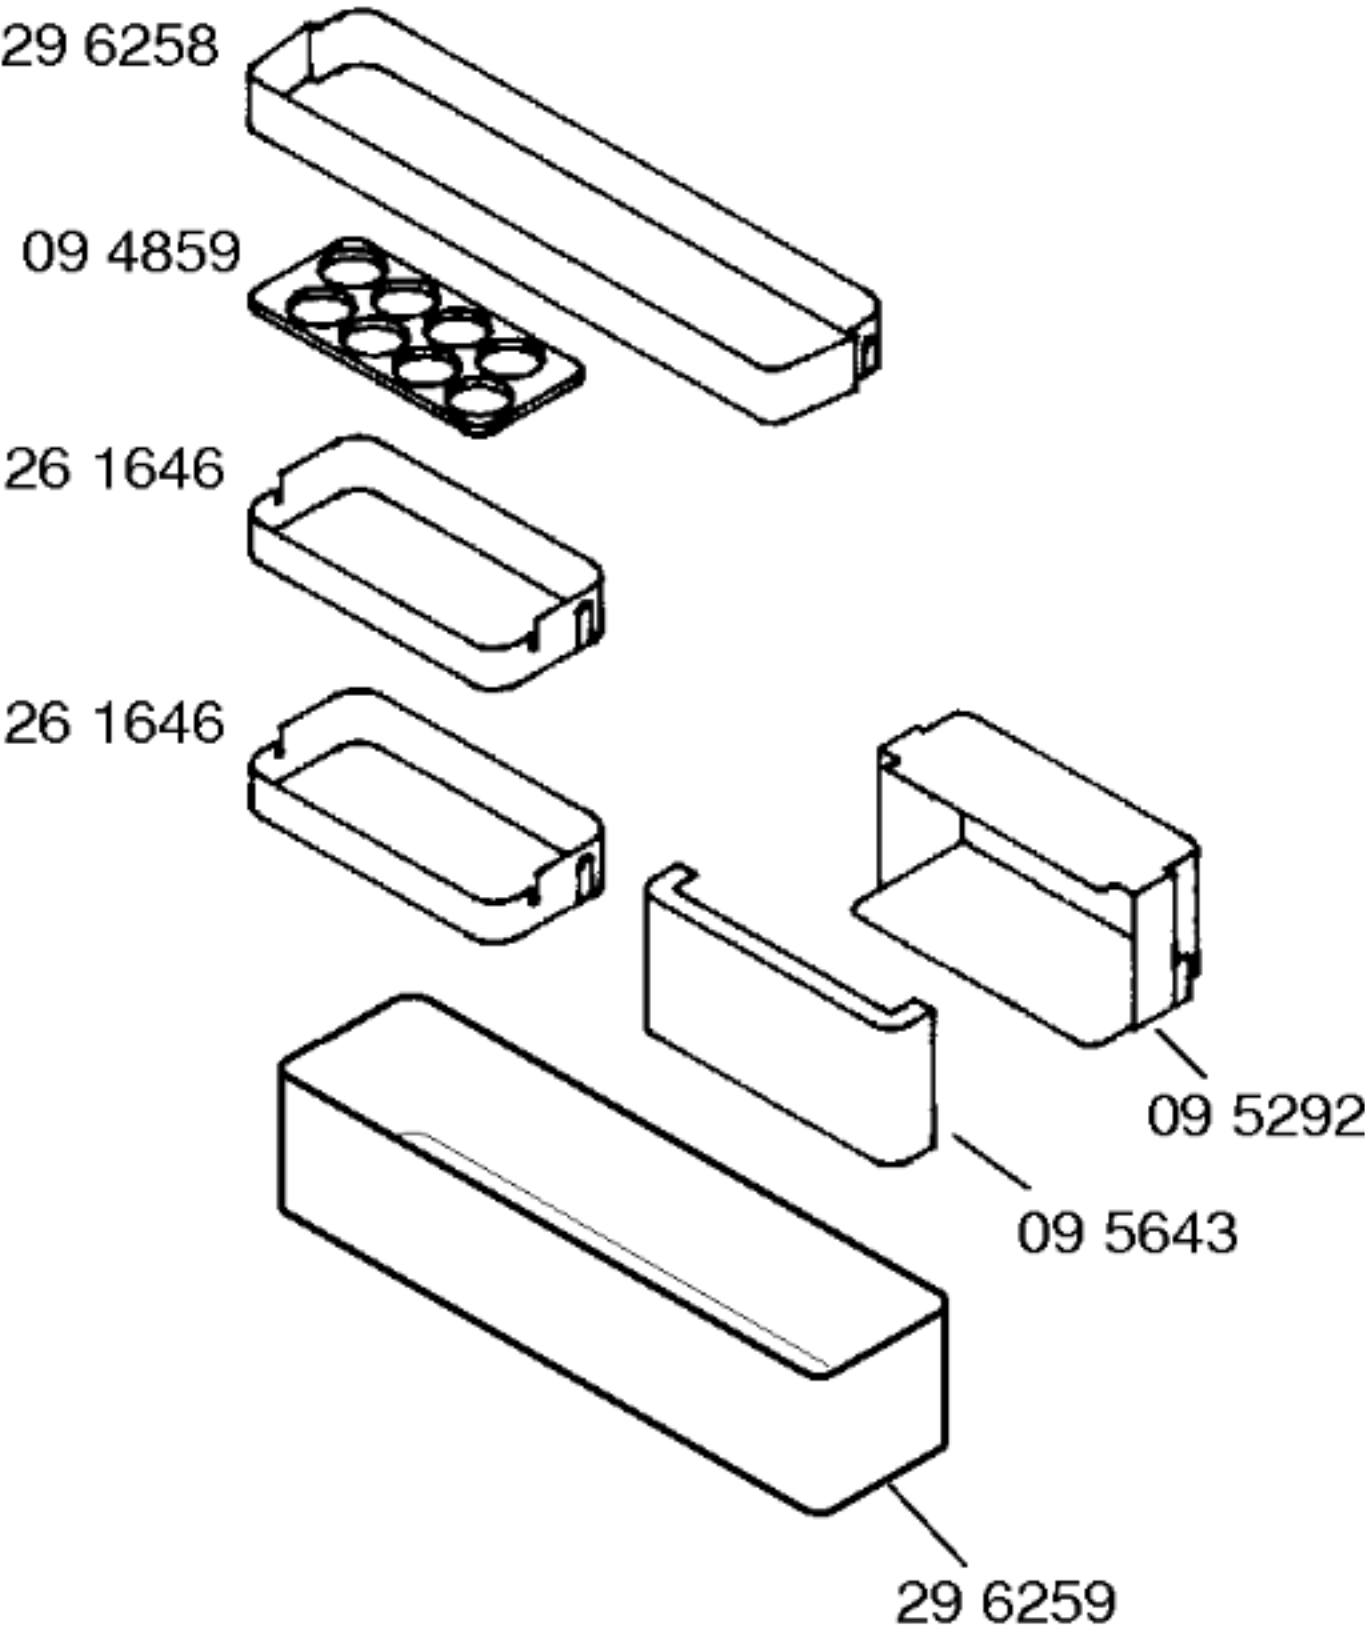



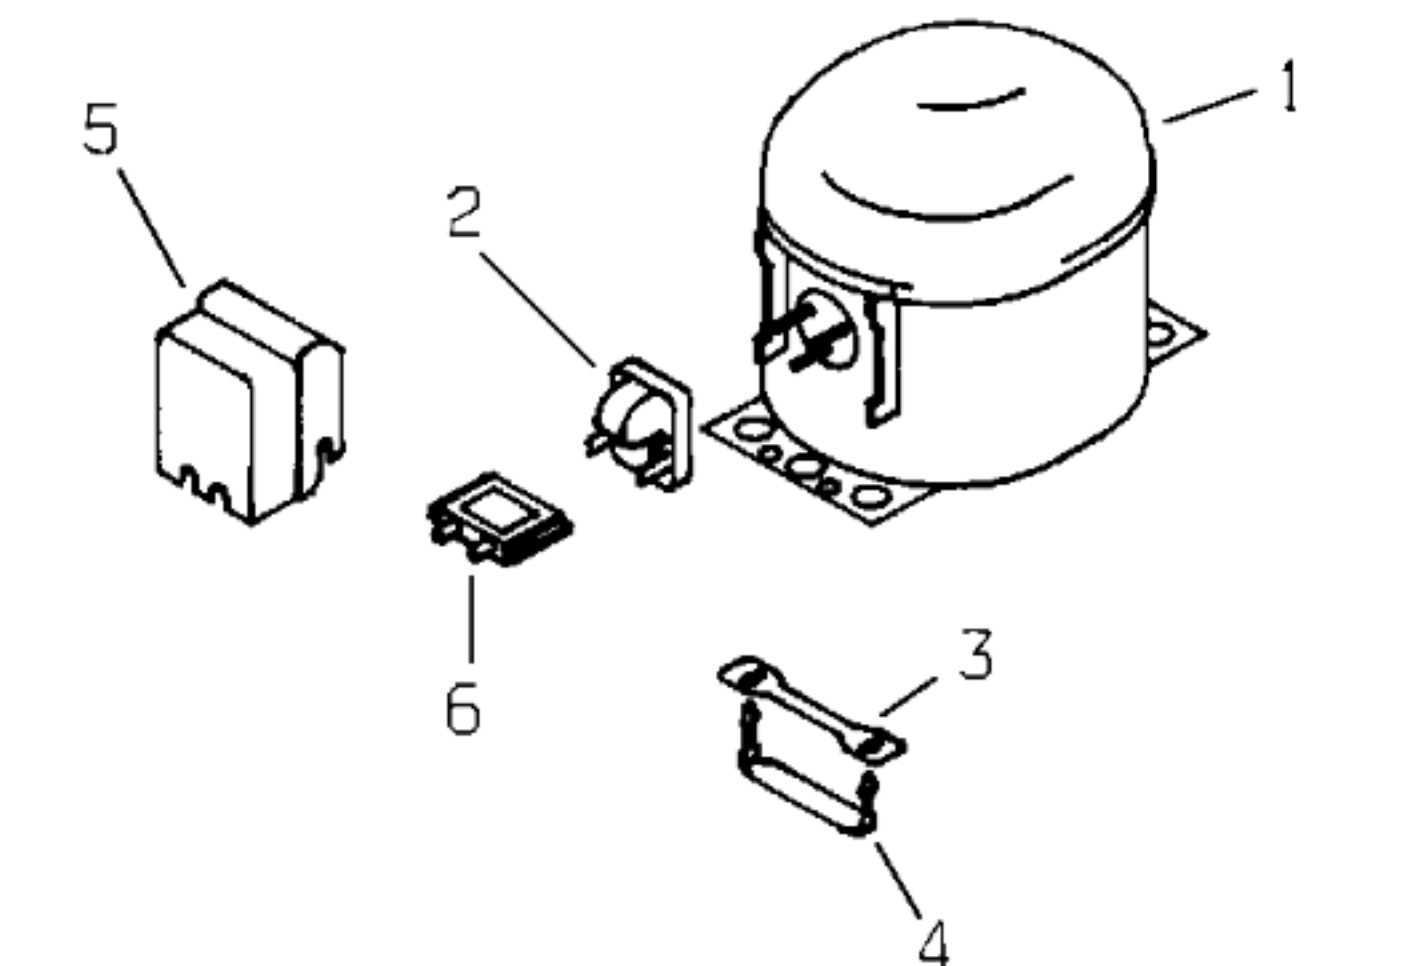

|      |          |  |  |
|------|----------|--|--|
| Pos. | Danfoss  |  |  |
|      | TLES 7 K |  |  |
| 1    | 14 1239  |  |  |
| 2    | 15 1055  |  |  |
| 3    | 15 1919  |  |  |
| 4    | 15 1918  |  |  |
| 5    | 15 1072  |  |  |
| 6    | 15 1053  |  |  |
| 7    |          |  |  |
| 8    |          |  |  |
| 9    |          |  |  |
| 10   |          |  |  |
| 11   |          |  |  |
| 12   |          |  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES  |  |                 |                   |
|---------------------------------------------------------|--|-----------------|-------------------|
| Verdichter/Compressor/Compresseur                       |  | Danfoss         |                   |
| Typ/Type                                                |  | TLES 7 K        |                   |
| Förderleistung/Delivery/Débit                           |  | l/h             | 1170              |
| Anlaufstrom/Starting current/Cour de démarrage          |  | A               | 7,6               |
| Widerstand/Resistance/Résistance                        |  | Ha/main/prin.   | Ω 16,5            |
|                                                         |  | Hi/aux          | Ω 16,9            |
| Temp.-Regler/Thermostat                                 |  | Ranco           |                   |
| Typ/Type                                                |  | K59             |                   |
| Reglerstellung/Position                                 |  | kalt            | warm              |
| Schaltwerte/Switching values/<br>Valeurs de commutation |  | „ein“           | °C +5             |
|                                                         |  | „aus“           | +5                |
|                                                         |  | („abtauen“ od.) | –28 –17           |
| Füllmenge/Fill.quantity/Charge                          |  | R600a           | g *               |
| Anschlußwert/Conn.load/Puiss. connectée                 |  | W               | 90                |
| Heizung/Heater/Chauffage                                |  |                 |                   |
| Widerstand/Resistance/Résistance                        |  | Ω               |                   |
| Leistung/Power/Puissance                                |  | W               |                   |
| Ventilator/Blower/Ventilateur                           |  |                 |                   |
| Widerstand/Resistance/Résistance                        |  | Ω               | MES F61-10<br>680 |
| Schaltuhr/Timer/Minuterie de contact                    |  |                 |                   |
| Widerstand/Resistance/Résistance                        |  | Ω               |                   |
| Magnetventil/Magnetic valve/Electrovanne                |  |                 |                   |
| Widerstand/Resistance/Résistance                        |  | Ω               |                   |
| Spannung/Voltage/Tension                                |  | V               |                   |

\* siehe Typenschild