


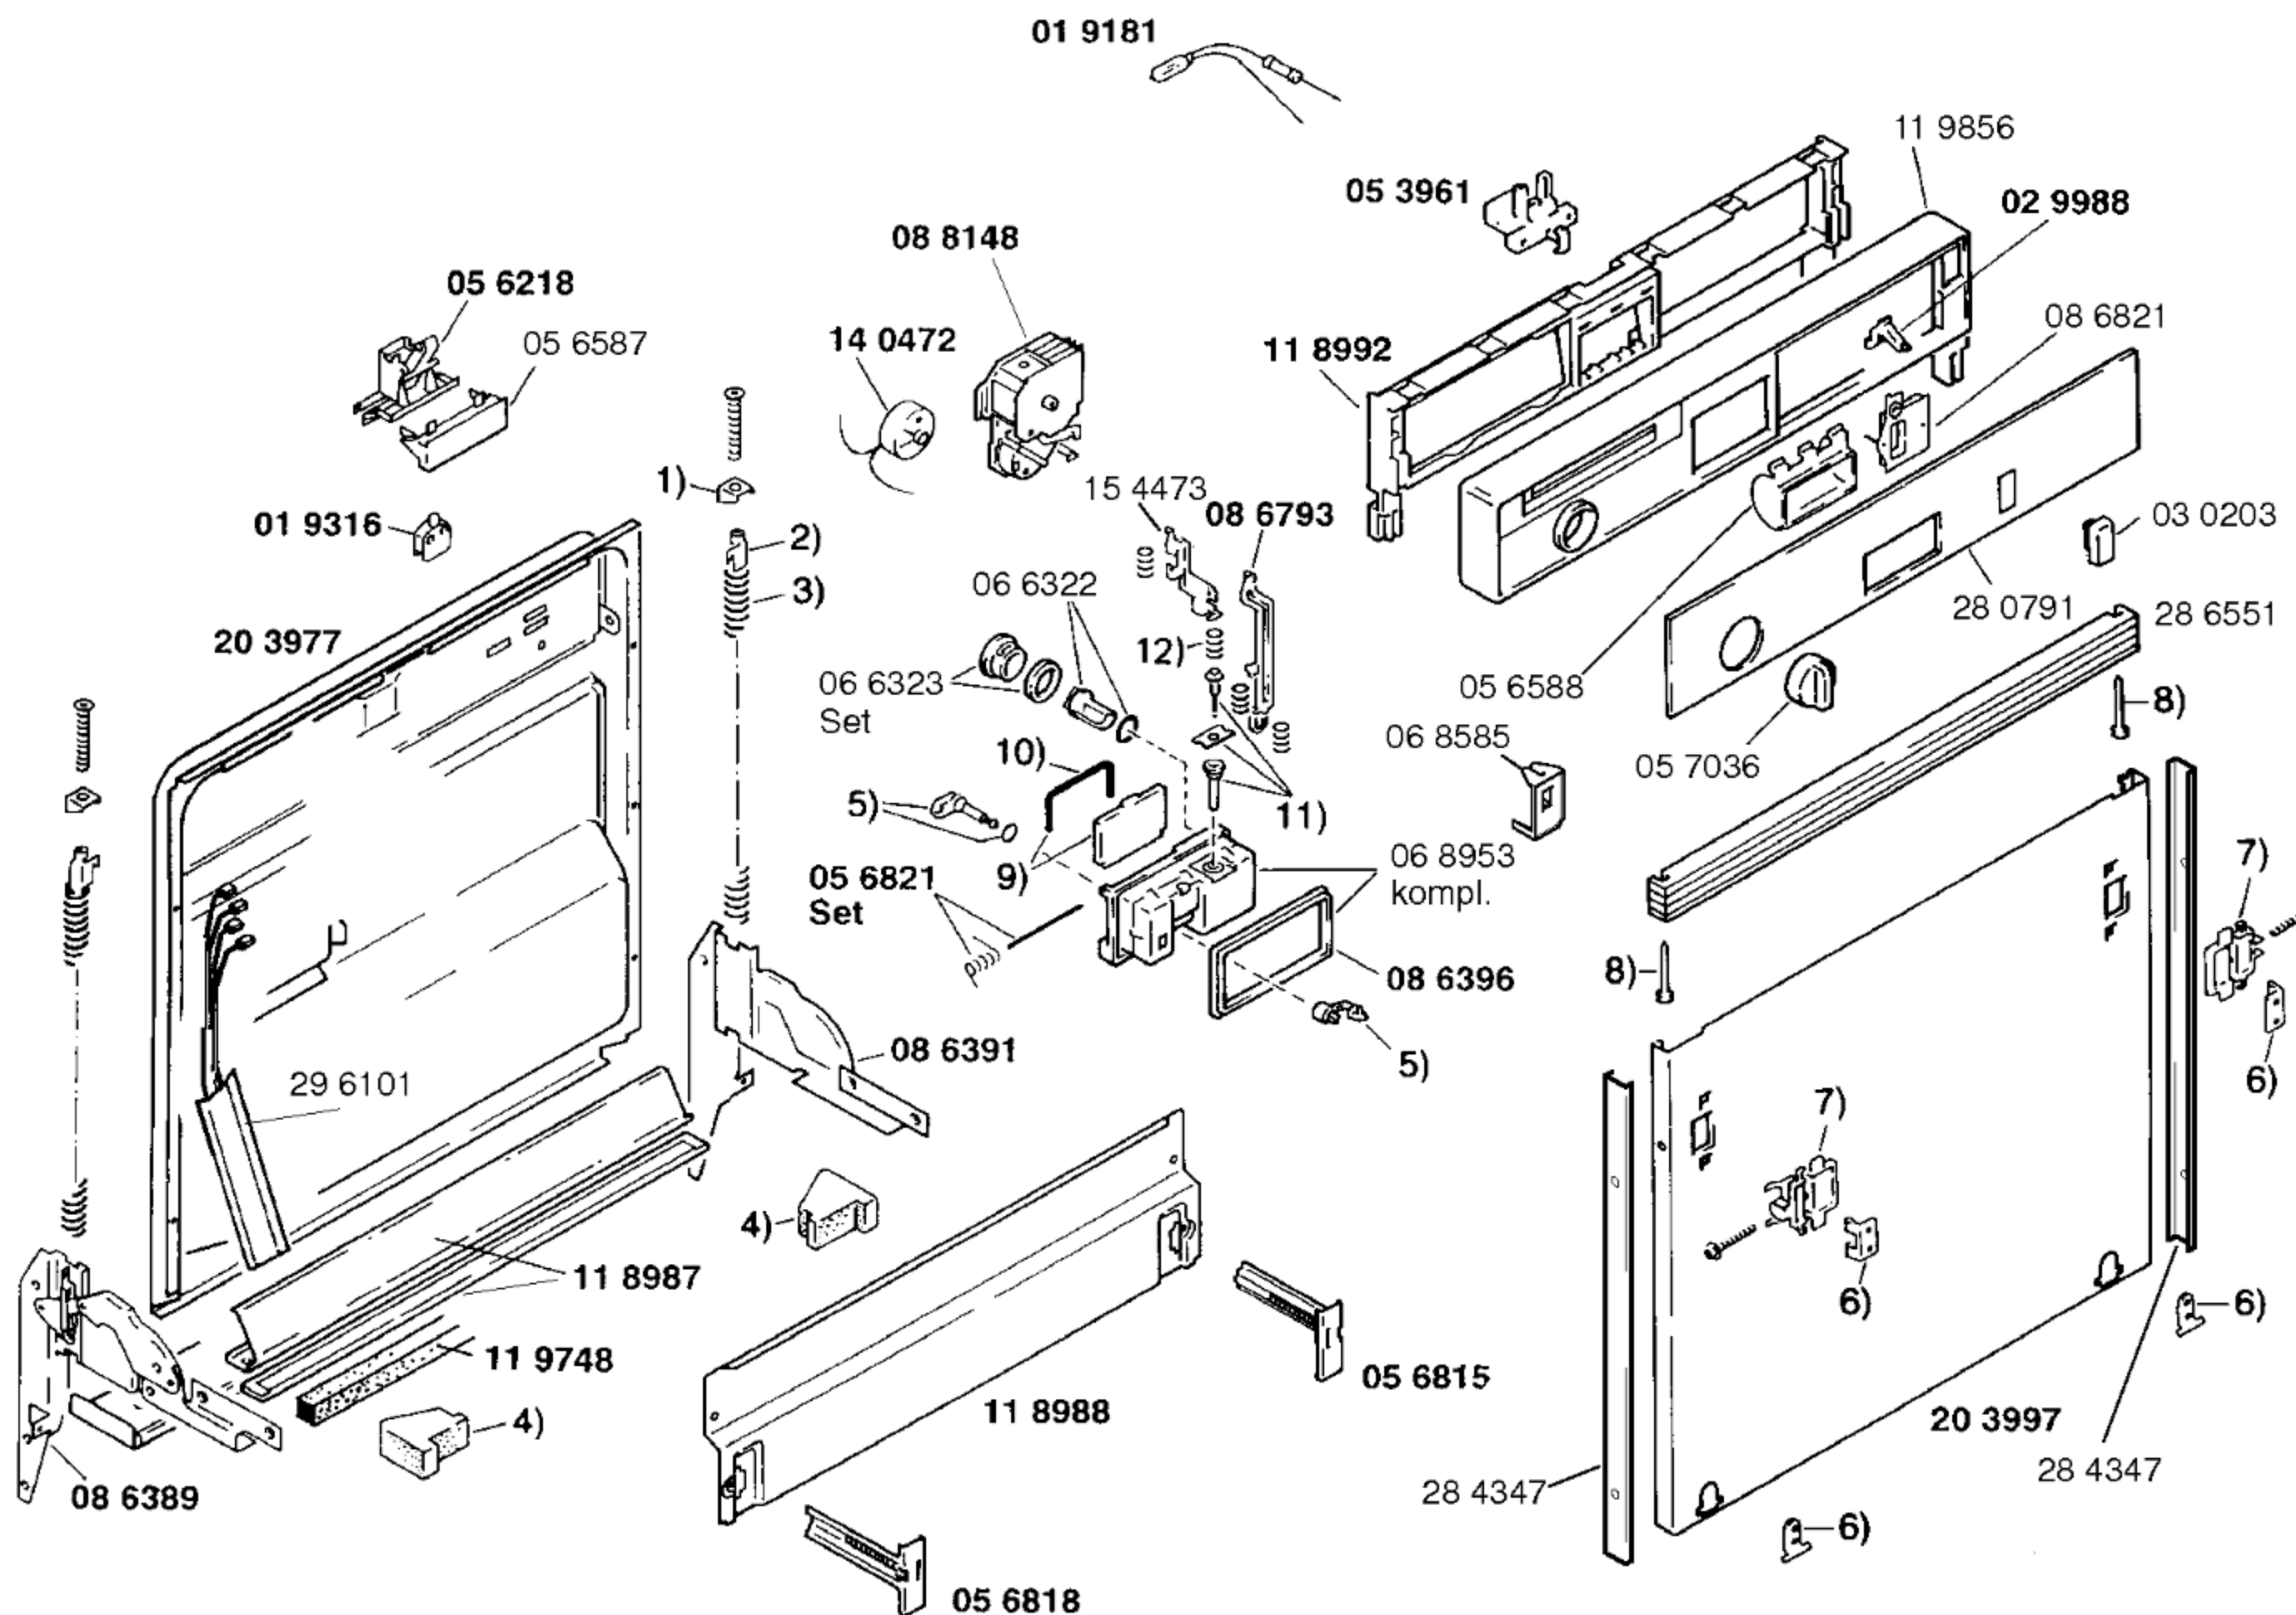

Gebrauchsanweisung  
51 3808  
(D,F,GB,I,NL,E,P)


Montageanweisung  
51 3842  
(D,F,GB,I,NL,DK,E,P,  
S,N,SF,GR,TR)

- |     |         |
|-----|---------|
| 1)  | 02 9941 |
| 2)  | 02 9029 |
| 3)  | 11 9996 |
| 4)  | 05 6860 |
| 5)  | 06 8956 |
|     | Set     |
| 6)  | 05 6823 |
|     | Set     |
| 7)  | 02 9673 |
| 8)  | 02 7091 |
| 9)  | 06 6319 |
| 10) | 02 9943 |
| 11) | 02 9945 |
|     | Set     |
| 12) | 02 9002 |
|     | Set     |


Zubehör :  
Unterbausockel  
Z7510X0

Verl.-Aqua-Stop  
Kupferrohr  
Z7250X0

Schl.Aqua-Stop II  
Z7252X0

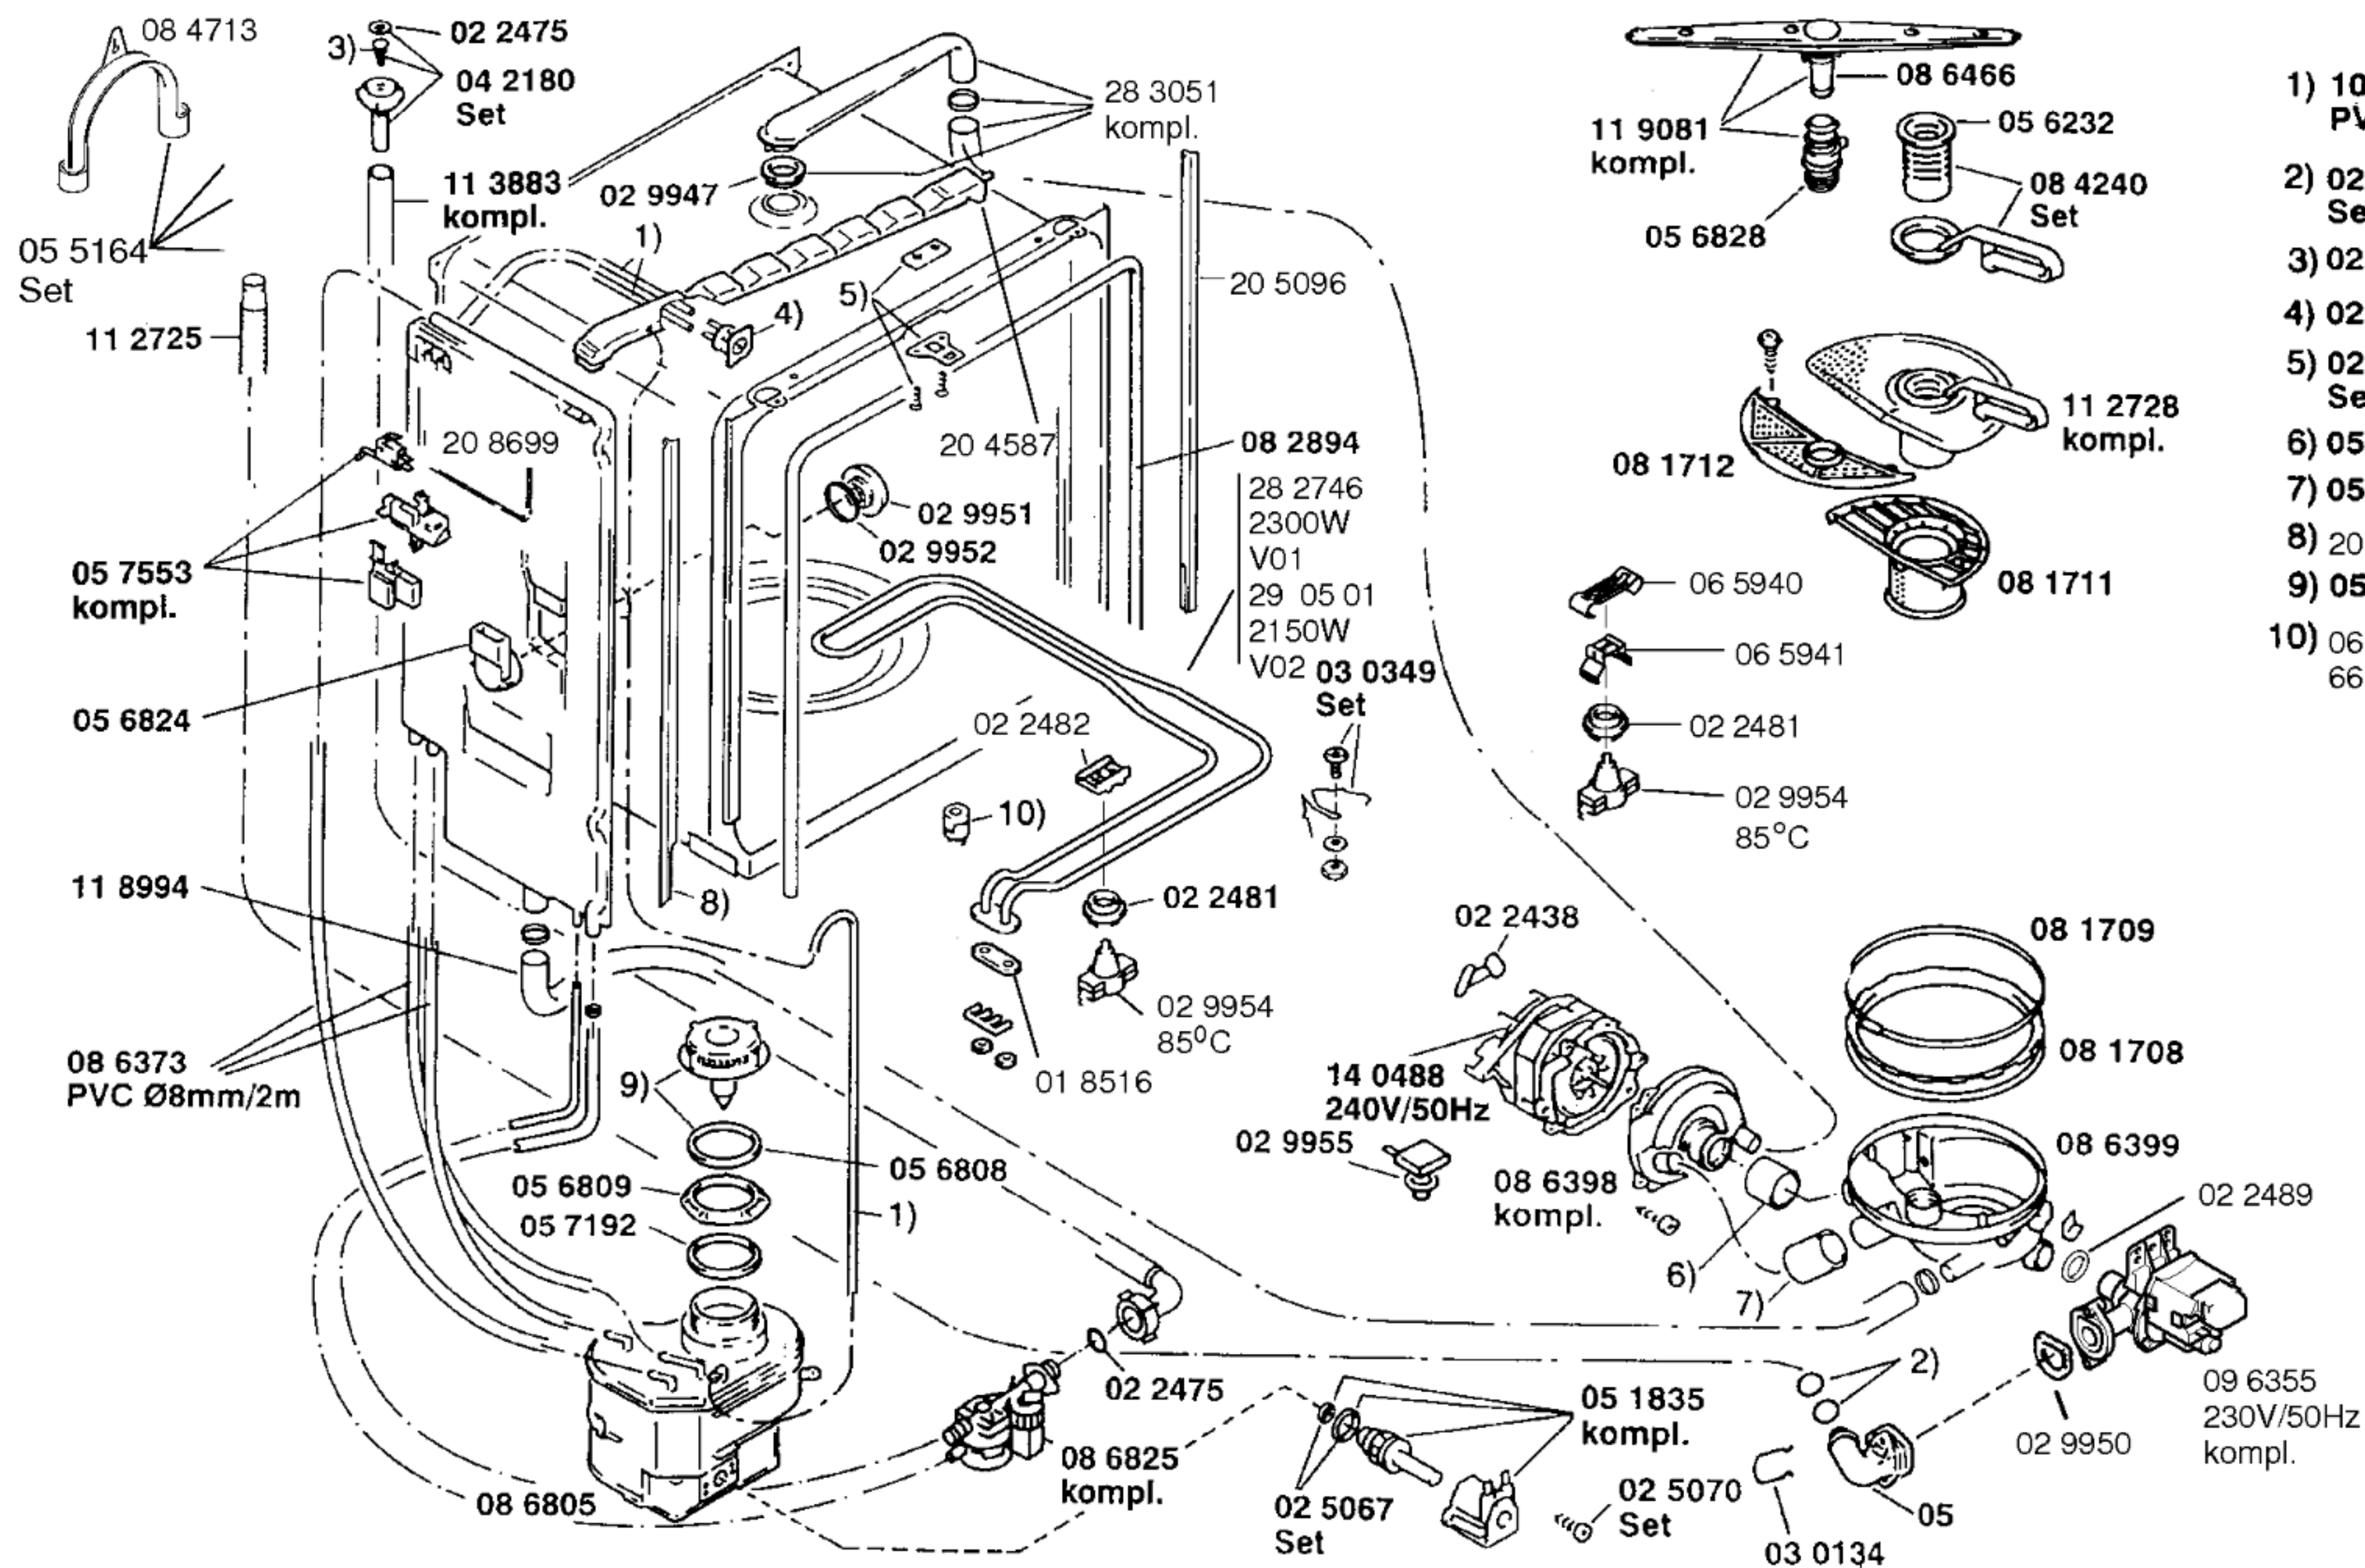

- 1) 10 4298 PVC Ø5mm/2m
- 2) 02 5069 Set
- 3) 02 7375
- 4) 02 9948
- 5) 02 9017 Set
- 6) 05 6826
- 7) 05 6827
- 8) 20 5095
- 9) 05 6807
- 10) 06 9132 66°C

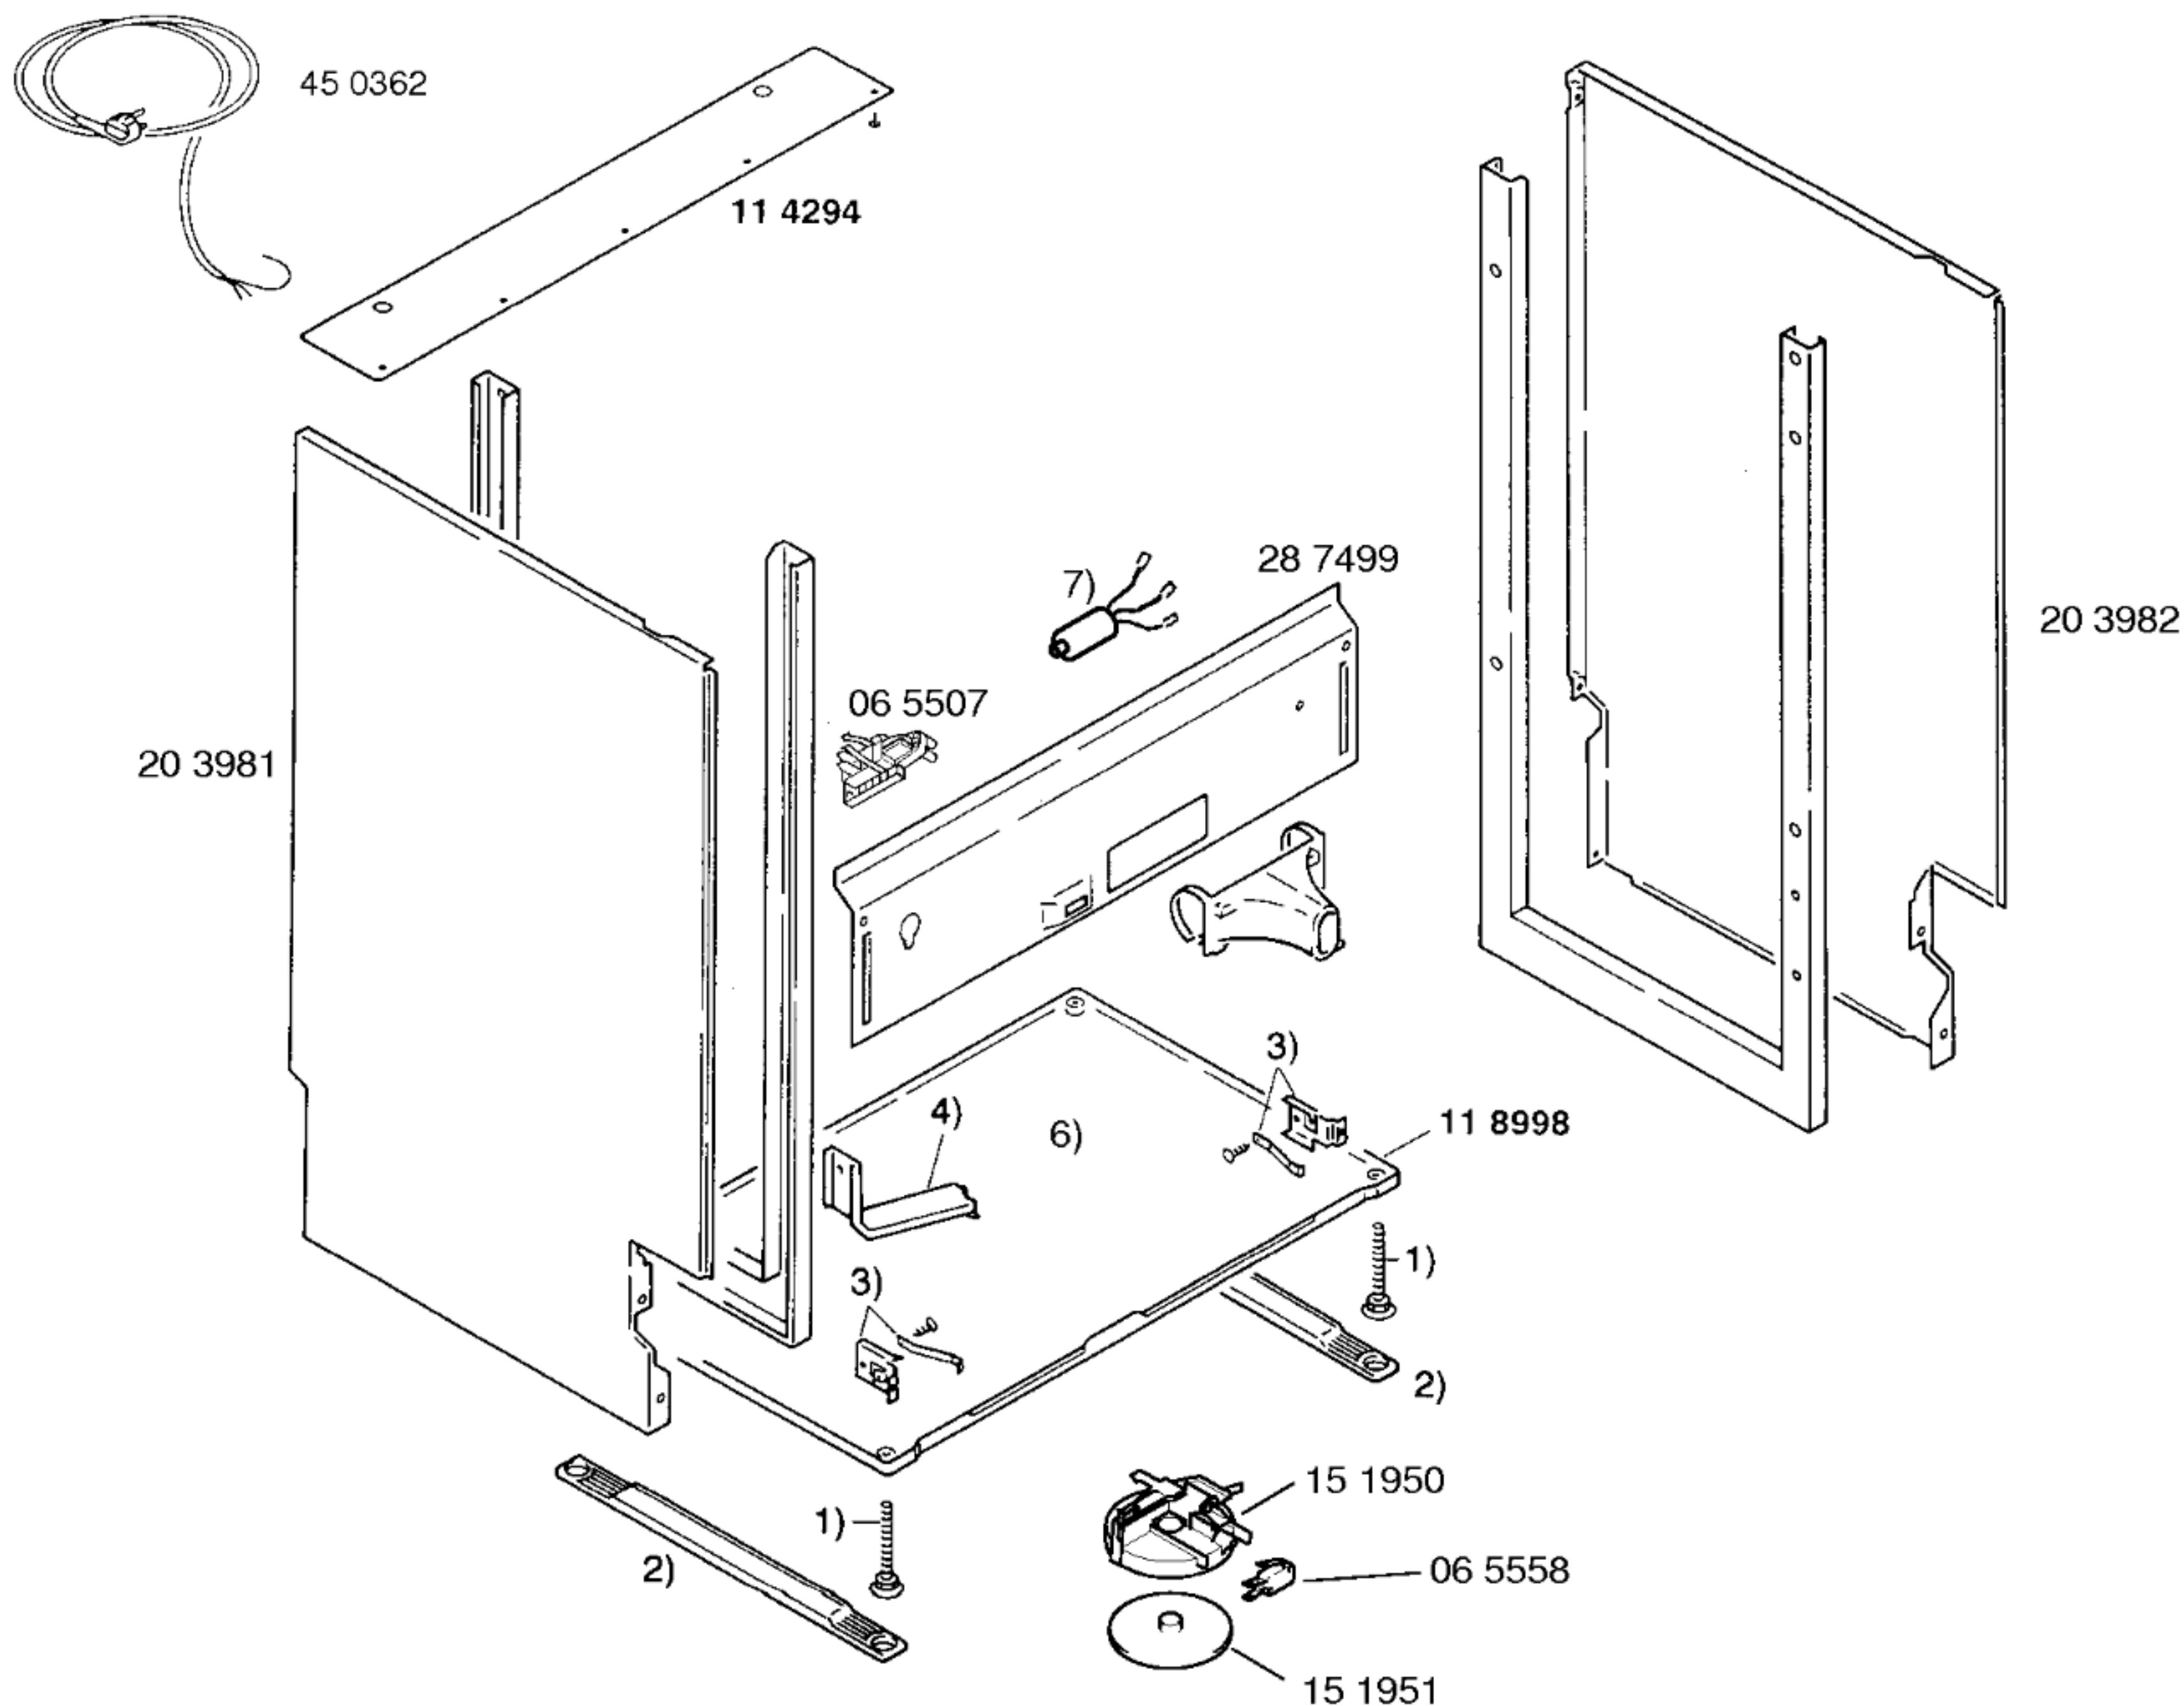

- 1) 15 4360
- 2) 28 2845
- 3) 05 6829
- 4) 08 6400
- 5) —
- 6) 08 6970
- 7) 02 9098

